

DEMOUNTABLE PARTITIONING SYSTEMS







EDITION #1



Our Product Range

For over two decades, Ozone has offered Architectural Hardware Solutions with a diversified portfolio of more than 5000 products. These products are tested and certified internationally for quality, functionality, and performance.






























Ozone has partnered with **KUBIK** to create India's most extensive range of Complete Partitioning Solutions for Homes, Offices, Banquets, Schools, and similar establishments. The new entity is named **KUBOZ** Arc Private Limited.







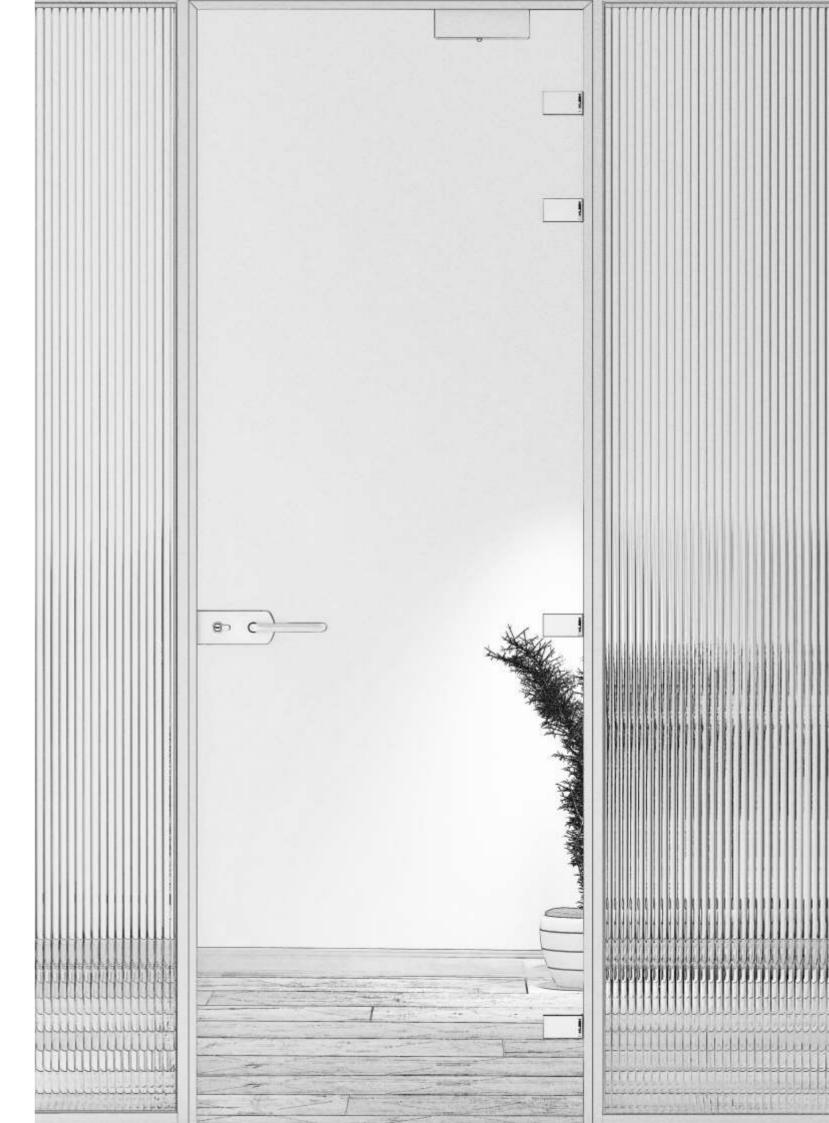





INFOGRAPHICS

How We Do it!



01.

CONCEPT

Here your requirement is shared with K-LITE team so that we can advise on required solutions. Our vision is to facilitate the successful and timely provision of the solutions.



02.

DESIGN

With around a decade of experience, K-LITE strives to design products which have a purpose and deliver exceptional results. They are aesthetically designed and technically acceptable.



03.

SUPPLY

Innovation being the core value for striving excellence, K-LITE supplies premium products with architectural choice products.

Dedicated channel partners, distributors and project partners, work across for a single cause result.





K-LITE SERIES

K-LITE 25 25mm x 22mm	-	03
K-LITE 25 Door Configuration	-	09
K-LITE 45 45mm x 22mm	-	21
K-LITE 45 Door Configuration	-	27
K-LITE 100 100mm x 22mm	-	39
K-LITE 100 Door Configuration	-	45
K-LITE EF 75 SG 75mm x 30mm	-	57
K-LITE EF 75 DG 75mm x 30mm	-	61
K-LITE EF 75 WD 75mm x 30mm	-	65
K-LITE EF 75 Door Configuration	-	68
SD 60	-	81
SD 75	-	83
SLIDING	-	85
GLASS DOOR	-	87
ACCESS CONTROL	-	89
HARDWARE	-	90
ACCESSORIES	_	97

HANA SERIES

• HANA EAZY-11 SINGLE SWING DOOR	- 107
• HANA EAZY-22 DOUBLE SWING DOOR	- 109
• HANA EAZY-33 WALL-TO-GLASS SINGLE SWING DOOR	- 111
• HANA EAZY-44 SINGLE SWING DOOR	- 113
• HANA EAZY-55 SINGLE SWING DOOR	- 115
• HANA EAZY-66 SINGLE SWING DOOR	- 117
 HANA EAZY-11/22/33/44/55/66 PROFILE & ACCESSORY DETAILS 	- 119
• HANA EAZY-11/22/33/44/55/66 HARDWARE	- 125
• HANA EAZY SL-11 MINIMAL SLIDING DOOR SYSTEM	- 133
• HANA EAZY SL-22 SELF-CLOSING SLIDING DOOR SYSTEM	- 141
• HANA EAZY SL-33 SELF-CLOSING SLIDING DOOR SYSTEM	- 149
CONCEPT-A STANDARD SLIDING DOOR SYSTEM	- 157
• HANA EAZY SL-11/22/33 & CONCEPT-A HARDWARE	- 161
• HANA EAZY SHOWER-11 FRAMED SHOWER ENCLOSURE	- 163
• HANA EAZY SHOWER-22	- 168

FRAMED SHOWER ENCLOSURE

OUTLINER SERIES

• OUTLINER SW-11 Single Door with Patch Fittings	- 177
• OUTLINER SW-22 Double Door with Patch Fittings	- 179
• OUTLINER SW-33 Double Door with Overpanel	- 181
• OUTLINER EN-11 Wall-To-Glass Shower Enclosure	- 185
• OUTLINER EN-22 Glass-To-Glass 90° Shower Enclosure	- 187
• OUTLINER EN-33 Glass-To-Glass 90° Shower Enclosure	- 189
• OUTLINER EN-44 Glass-To-Glass 180° Shower Enclosure	- 191
• OUTLINER EN-55 Wall-To-Glass Shower Enclosure 180°	- 193
• OUTLINER FOLD OS-444 Offset Sliding door System	- 197
• OUTLINER FOLD CS-444 Center Sliding Folding System	- 199
OUTLINER AUTO PRO Automatic Sliding System	- 207







How can we solve?

Acoustics: Absorb, Block or Cover

There are three methods of dealing with sound, commonly referred to as the ABC's. Sound can be Absorbed, it can be Blocked or redirected and it can be Covered. The method chosen depends on the final goal of the project.

Sound should be absorbed when the goal is to keep it within the room from reverberating or echoing. If a room has hard surfaces that reflect sound, it will take a long time for the sound level to diminish to a point that it is inaudible. This is most noticeable in an empty room with hard walls, floors and ceilings. You can hear the sounds bouncing around the room. Installing sound absorbing materials such as carpet, acoustic ceiling tiles or fabric covered panels, will reduce the reverberation by absorbing the sound. Noise Reduction Coefficient, which is defined above, is used for rating a material's ability to absorb sound.

If the goal is to keep the sound within a space, for privacy or other reasons, the sound should be blocked. This can be combined with absorption so that the reverberation in the space is reduced. Blocking sound is generally accomplished by reducing short circuits between two spaces. Common air space is the FIRST path that sound uses and hence this needs to be explored first. If you have a 5% air gap in any kind of a noise barrier, 90% of sound leaks through that air space. Some common features include HVAC ducts or grilles, back-to-back outlets, pipes that pass through a space, partitions that stop above the ceiling but do not extend to the structural deck above. Adding mass to the walls will help block the sound. For instance, a concrete wall blocks sound better than a stud wall. Additional layers of gypsum wall board and insulation in the wall cavity will also help block the sound.

Sound can also be covered to help maintain speech privacy. This is most noticeable in an office environment when the forced air system is turned off. The idea is to provide just a bit of background noise to make nearby conversations unintelligible; the conversation is still there, but the quiet hum of the noise (soft music) masks it.

Acoustic Partition Specification

Why is it required?


An office is the centre of communication, thinking & collaboration. Any unwanted noise within an office is a major distraction and is a reason for employees not being able to achieve optimum productivity. Soundproofing is a necessity for offices, because apart from the noise within office interiors, there is a huge problem of unwanted noise from the exteriors such as traffic, construction, etc. which have the same unpleasant effect. The soundproof offices help in noise cancellation of this unwanted noise which intrudes the 'Thinking Space' of the employees.

Similarly, besides noise reduction, at times it is required to prevent certain discussions from being heard outside a cabin or conference room. Our state-of-the-art Acoustic Office Demountable Glass Partitions makes sure that peace and tranquillity within the office is maintained, and that important discussions remain confidential.


Leakage of sounds come from three common places;

a - Common air space (Ceiling), b - Mass & Density (Walls), c - Hard surface (Floor)

Poor Acoustic

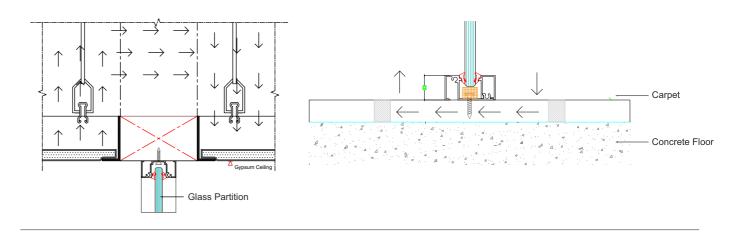

Good Acoustic

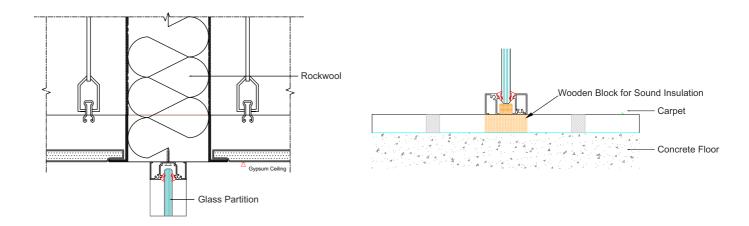


25mm x 22mm (single glaze)







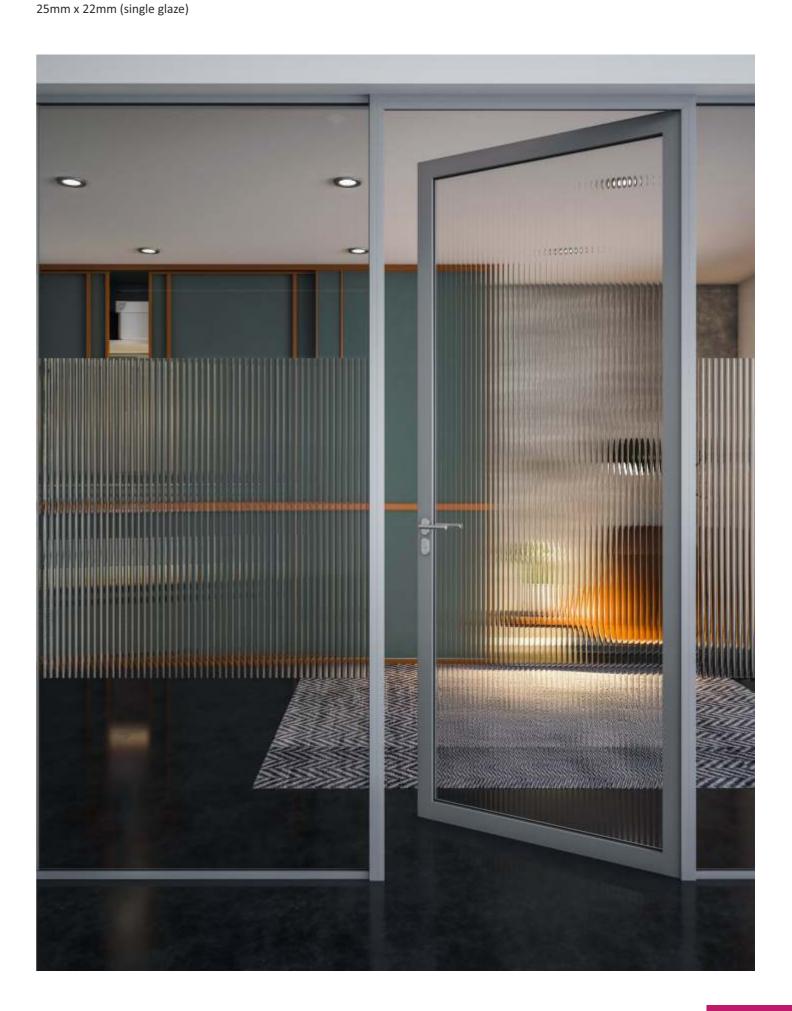









Technical Details

CONTEMPORARY WORKING SPACE WITH MINIMALISTIC APPROACH

K-LITE 25 Series Demountable Architectural Office Partitions can be equipped with strong acoustic insulation, for more relaxing atmosphere within the large office spaces, with minimal section visibility. Multiple options of solid door or tempered glass can be created, which can be installed along with the selection of door frames.

Features

- Standard Section: 25mm x 22mm
- Slim in design, the standard partition suite can be used with any stud thickness
- Suitable for 8mm / 10mm / 12mm toughened glass
- Single door frame sizes to allow for flush door 35mm
- Partition height can be offered up to 3000mm
- Single glazed systems
- Sound insulation capacity of 30 32 dB

Door options

- Frame less glass, Stile glaze door, Timber or Sliding door system

Soild doors

- Timber doors can be of 44mm solid core in choice of veneers*

Door frames

- Aluminium full height up to 3000mm, doors are mounted on either of the hinges, pivots or sliding tracks. A range of Ironmongery can be supplied and incorporated with K-LITE 25 series

Size limits

- K-LITE is designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium sections are anodized aluminium finish with 6063 T6 Grade

Assembly Characteristics


Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms. Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed accuracy of the installation and correct alignments of panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.


Available in two colors



* Kindly consult Authorised K-K-LITE person before placing order or confirmation

Technical Details

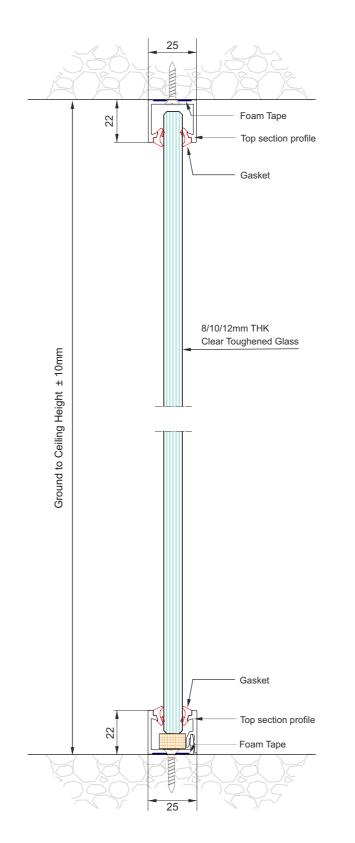

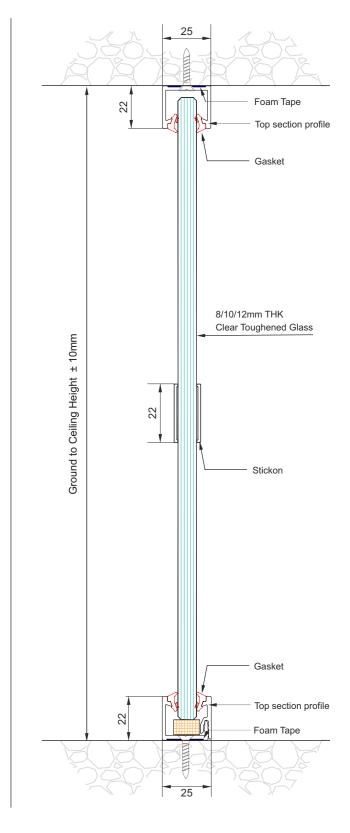











SOPHISTICATED ARCHITECTURAL DESIGN OPTIONS

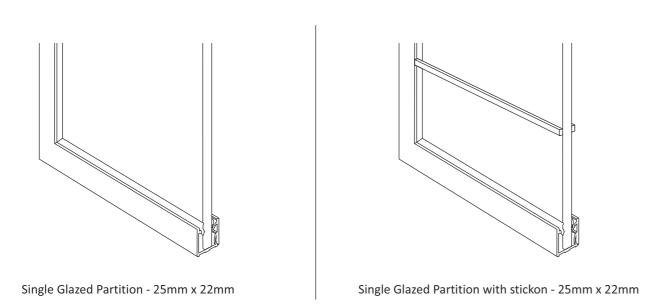

THESE ARE THE OPTIONS FOR JOINING GLASS AT I, L & T JUNCTIONS

Suitable for 8mm / 10mm / 12mm toughened glass.

The profiles feature a double-sided adhesive tape that guarantee a perfect structural union and sound insulation.

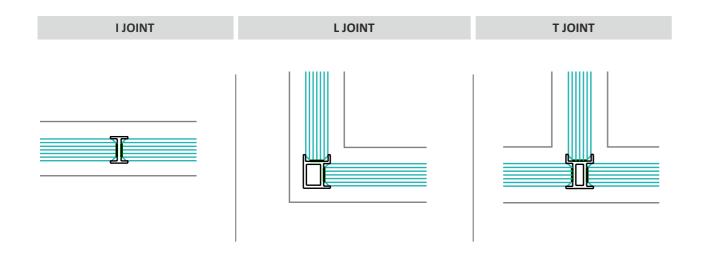









Door Configuration



K-LITE 25 Glazing with Stickon and K-LITE 45 Door Frame.

Door :- Stile 60 on Hinges with Stickon and Mortise lock and handle



Door Configuration



K-LITE 25 Glazing with I Joint and K-LITE 45 Door

Door :- Glass Door with side hinges, D handle, bottom lock and Door Closer.

K-LITE 25 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with Top-bottom Pivot, D handle and bottom lock





K-LITE 25 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with side hinges, Studio Lock and Door Closer.

K-LITE 45 Door Frame. Door :- Glass Door with Top-bottom Pivot, H handle and bottom lock



with I Joint and K-LITE 45 Door Frame.

K-LITE 25 Glazing

Door :- Glass Door with side hinges, H handle, bottom lock and Door







25mm x 22mm (single glaze)





25mm x 22mm (single glaze)



Door Configuration



K-LITE 25 Glazing with Stickon and Ultra45 Door Frame.

Door :- Wooden Door with hinges, H handle and Door Closer.



K-LITE 25 Glazing with I Joint and Ultra45 Door Frame.

Door :- Wooden Door with hinges, H handle and Door Closer.



K-LITE 25 Glazing with I Joint and Ultra45 Door Frame.

Door :- Glass Door with Top-bottom Pivot and Studio lock














Door Configuration



Typical Layout

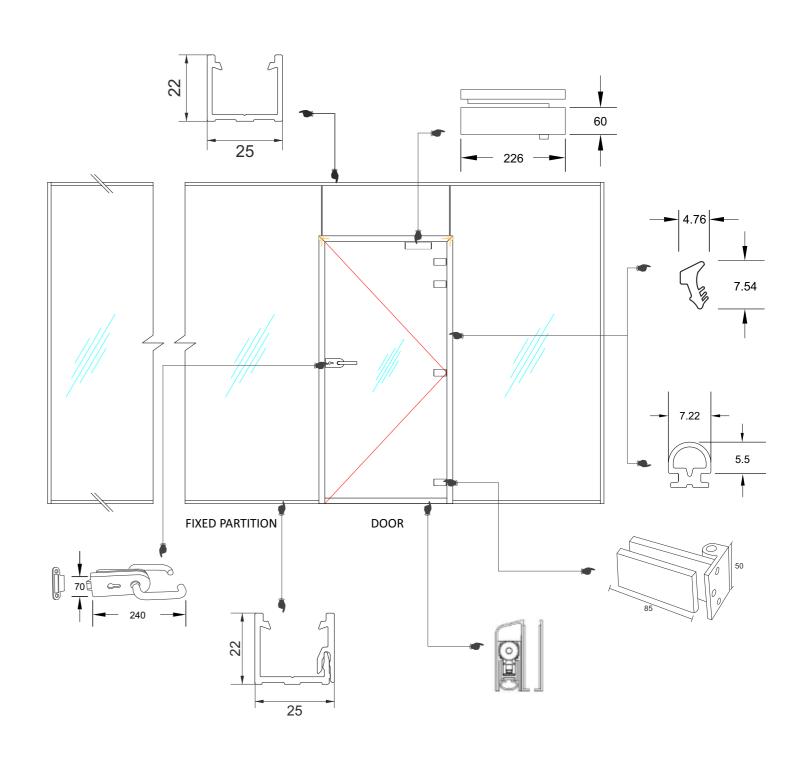









K-LITE 25 (25mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - 25 - 001	K-LITE 25mm x 22mm Fix Profile	SET	3	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
	OZKL - 25 - 002	K-LITE 25mm x 22mm Folding Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKLST - 001	Stickon Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 001	K-LITE 45 Door Frame Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 003	Flush Cap for Floor Machine Use	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
W	OZKL - PT - 001	Door Jamb for SD 60 and 35mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
5	OZKL - D60 - 101	SD 60 Vertical Profile 60 x 35	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D60 - 102	SD 60 Top-Bottom Profile 60 x 35	Pcs	2.1	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt

K-LITE 25 (25mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - I - 8	I Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 10	I Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 12	I Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 8	L Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 10	L Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 12	L Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
1	OZKL - T - 8	T Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 10	T Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt









K-LITE 25 (25mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - T - 12	T Joint for 12mm glass	Pcs	3	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
1	OZKL - GASKET 001 GR / BK	Used for Door Frame Profile	RMTR	3	• Gray • Black
	OZKL - GASKET 002-08	Gasket for 8mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 004-10	Gasket for 10mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 003-12	Gasket for 12mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 005 GR / BK	Gasket for Door Jamb	RMTR	3	• Gray • Black
	OZKL ACC 001	Corner Connector for Door Jamb	Pcs		
	OZKL ACC 002	Corner Connector for Glazing Profile	Pcs		

K-LITE 25 (25mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	
	OZKL ACC 003	Threaded Rod for Door 1mtr	SET	
	OZKL ACC 004	Threaded Rod for Door 2mtr	SET	
	OZKLFT 10mm x 1mm x 10mtr	Acoustical Single Side Foam Tape	Roll	
O	OZKLCT 6mm x 1mm x 10mtr	Double Sided Acrylic Clear Tape used for I, L, T Joint	Roll	
P	OZKLCT 18mm x 0.8mm x 10mtr	Double Sided Acrylic Clear Tape used for BrooOZKLyn Profile	Roll	



45mm x 22mm (single glaze)




K-LITE 45

45mm x 22mm (single glaze)





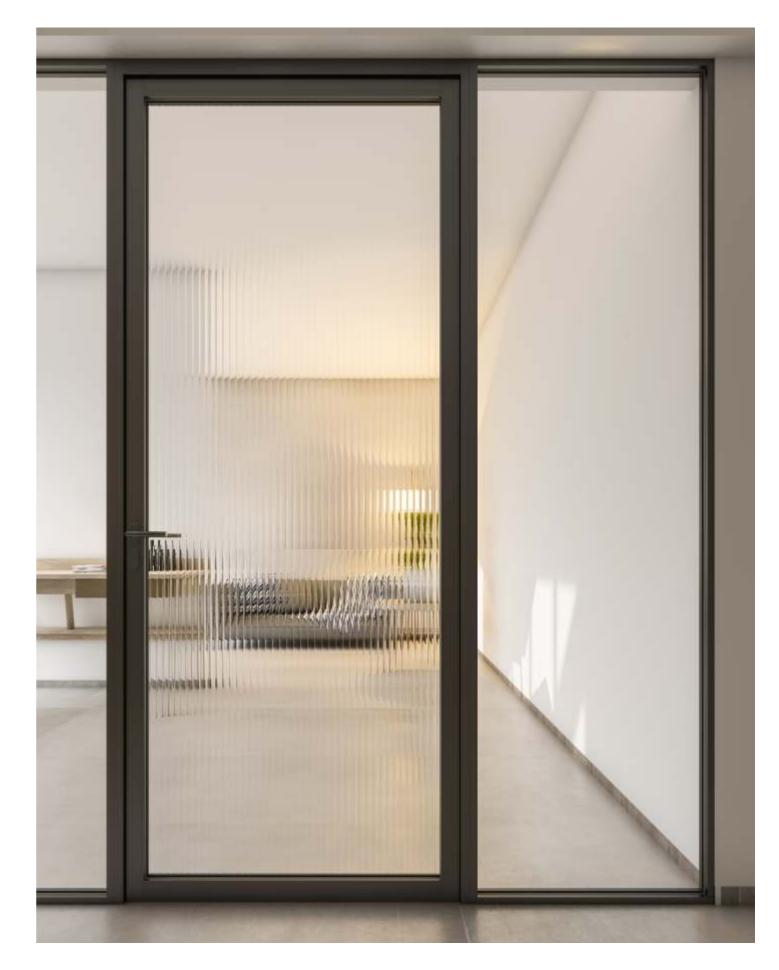







Technical Details

CONTEMPORARY WORKING SPACE WITH MINIMALISTIC APPROACH

The K-LITE 45 Demountable Architectural Office Partition is a superior lightweight profile system. It is based on a 45mm x 22mm glazing seal and bead with a selection of door frame option. K-LITE 45 frames provide an elegant and cost effective design solutions.

Features

- Standard section: 45mm x 22mm
- Slim in design, the standard partition suite can be used with any stud thickness
- Suitable for 8mm / 10mm / 12mm toughened glass
- Single door frame sizes to allow for flush door 35mm
- Partition height can be offered up to 3000mm
- Single glazed systems
- Sound insulation capacity of 32 34 dB

Door options

- Frame less glass, Stile glaze door, Timber or Sliding door system

Solid doors

- Timber doors can be of 35mm or 45mm solid core in choice of veneers*

Door frames

- Aluminium full height up to 3000mm, doors are mounted on either of the hinges, pivots or sliding tracks. A range of Ironmongery can be supplied and incorporated with K-LITE 25 series.

Size limits

- K-LITE is designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium sections are anodized aluminium finish with 6063 T6 Grade

Assembly Characteristics

Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms.

Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed accuracy of the installation and correct alignments of panel.


All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.


Available in two colors




 $\hbox{* Kindly consult Authorised K-LITE person before placing order or confirmation}\\$

Technical Details

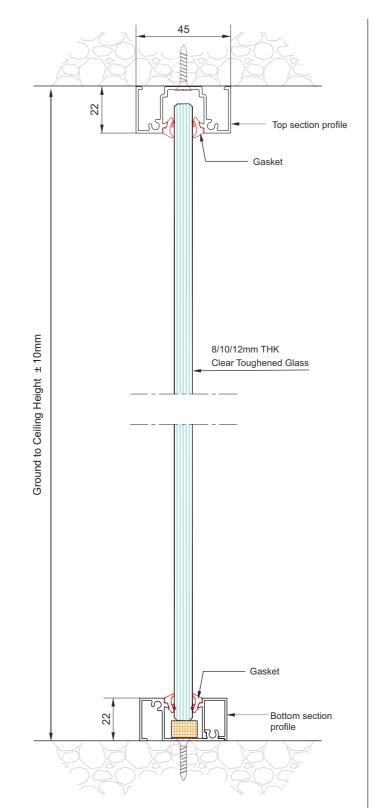

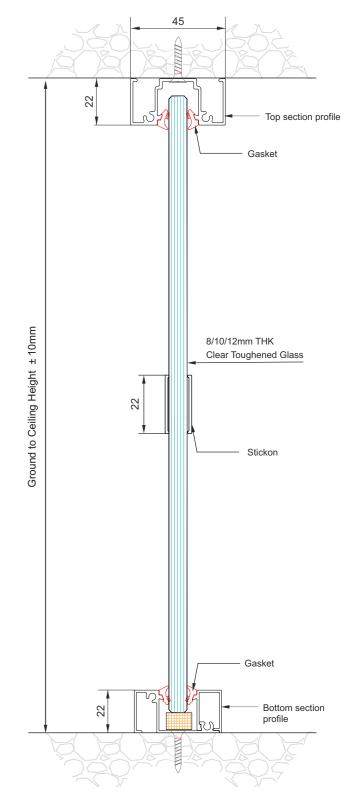











SOPHISTICATED ARCHITECTURAL DESIGN OPTIONS

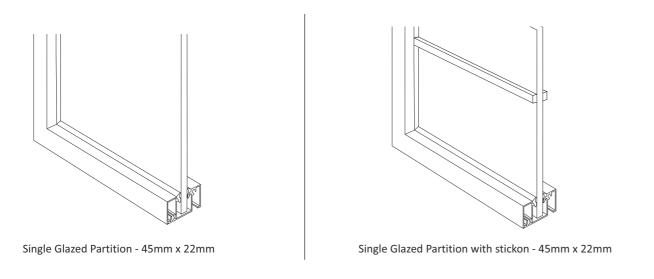

THESE ARE THE OPTIONS FOR JOINING GLASS AT I, L & T JUNCTIONS

Suitable for 8mm / 10mm / 12mm toughened glass.

The profiles feature a double-sided adhesive tape that guarantee a perfect structural union and sound insulation.

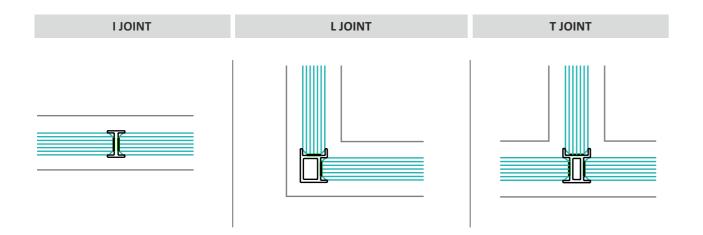



45mm x 22mm (single glaze)







Door Configuration



K-LITE 45 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with Top-bottom Pivot, D handle and bottom lock



Door Configuration



K-LITE 45 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Wooden Door with hinges, H handle and Door Closer.

K-LITE 45 Glazing with Stickon and K-LITE 45 Door Frame.

Door :- Wooden Door with hinges, H handle and Door Closer.



K-LITE 45 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with side hinges, H handle, bottom lock and Door Closer.



27

K-LITE 45 Glazing with Stickon and K-LITE 45 Door Frame.

Door :- Stile 60 on Hinges with Stickon and Mortise lock and handle



K-LITE 45 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with side hinges, D handle, bottom lock and Door Closer.



Door :- Glass Door with side hinges, Door closer and Studio Lock.



K-LITE 45 Glazing with I joint and K-LITÉ 45 Door Frame.

Door :- Stile 60 on Hinges with Mortise lock and handle



45mm x 22mm (single glaze)







Door Configuration



K-LITE 45 Glazing with Stickon and K-LITE 45 Door Frame.

Door :- Stile 75 with Stickon and Mortise lock and handle



Door Configuration



K-LITE 45 Glazing with I Joint and K-LITE 45 Door Frame.

Door :- Glass Door with Top-bottom Pivot, H handle and Bottom lock



K-LITE 45 Glazing with I joint and K-LITE 45 door frame.

Door :- Stile 75 with Mortise lock and handle



K-LITE 45 Glazing with I joint and K-LITE 45 door frame.

Door :- Glass Door with side hinges, Double D handle, bottom lock and Door Closer.







Door :- Glass Door with Top-bottom Pivot and Studio

lock












Typical Layout

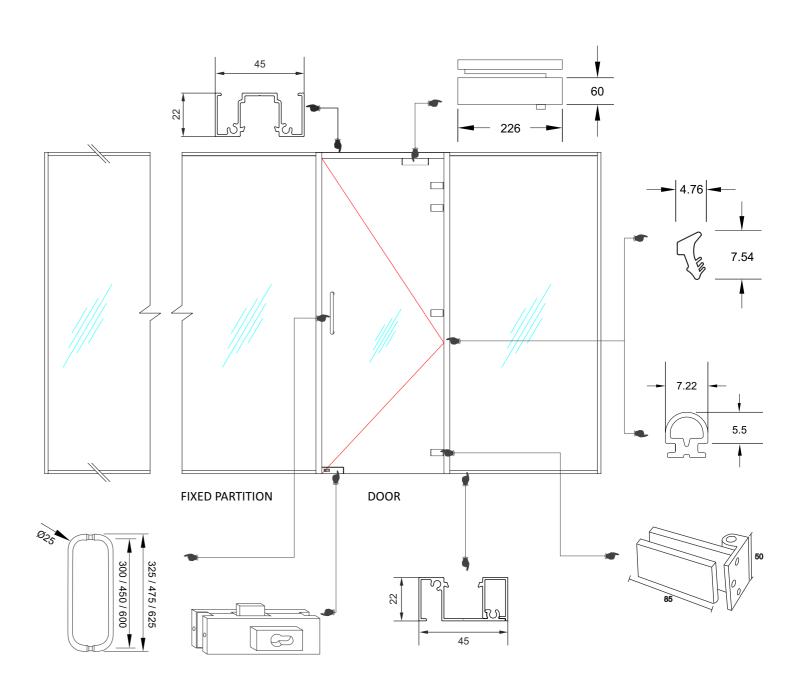









K-LITE 45 (45mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
IT	OZKL - 45 - 001	K-LITE 45mm x 22mm Folding Profile	SET	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 002	K-LITE 45mm x 22mm Fix Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 003	Flush Cap for Floor Machine Use	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 004	BrooOZKLyn 45mm x 25mm Base Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 005	BrooOZKLyn 45mm x 25mm Base Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKLST - 001	Stickon Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - PT - 001	Door Jamb for SD 60 and 35mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
M	OZKL - PT - 002	Door Jamb for SD 75 and 45mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D60 - 101	SD 60 Vertical Profile 60 x 35	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D60 - 102	SD 60 Top-Bottom Profile 60 x 35	Pcs	2.1	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt

K-LITE 45 (45mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - D75 - 103	SD 75 Vertical Profile 75 x 45	Pcs	3	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
	OZKL - D75 - 104	SD 75 Top-Bottom Profile 75 x 45	Pcs	2.1	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
	OZKL - I - 8	I Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 10	l Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 12	I Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 8	L Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 10	L Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 12	L Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt










K-LITE 45 (45mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - T - 8	T Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 10	T Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 12	T Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
1	OZKL - GASKET 001	Used for Door Frame Profile	RMTR	3	• Gray • Black
	OZKL - GASKET 002-08	Gasket for 8mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 004-10	Gasket for 10mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 003-12	Gasket for 12mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 005	Gasket for Door Jamb	RMTR	3	• Gray • Black

K-LITE 45 (45mmx22mm)

IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE
	OZKL ACC 001	Corner Connector for Door Jamb	PCS	
	OZKL ACC 002	Corner Connector for Glazing Profile	PCS	
	OZKL ACC 003	Threaded Rod for Door 1mtr	SET	
	OZKL ACC 004	Threaded Rod for Door 2mtr	SET	
Comment of the second	OZKL ACC 005	Corner Joint for SD 75 when using Door Closer	Pcs	
0	OZKLFT 10mm x 1mm x 10mtr	Acoustical Single Side Foam Tape	Roll	
P	OZKLCT 6mm x 1mm x 10mtr	Double Sided Acrylic Clear Tape used for I, L, T Joint	Roll	
0	OZKLCT 18mm x 0.8mm x 10mtr	Double Sided Acrylic Clear Tape used for BrooOZKLyn Profile	Roll	

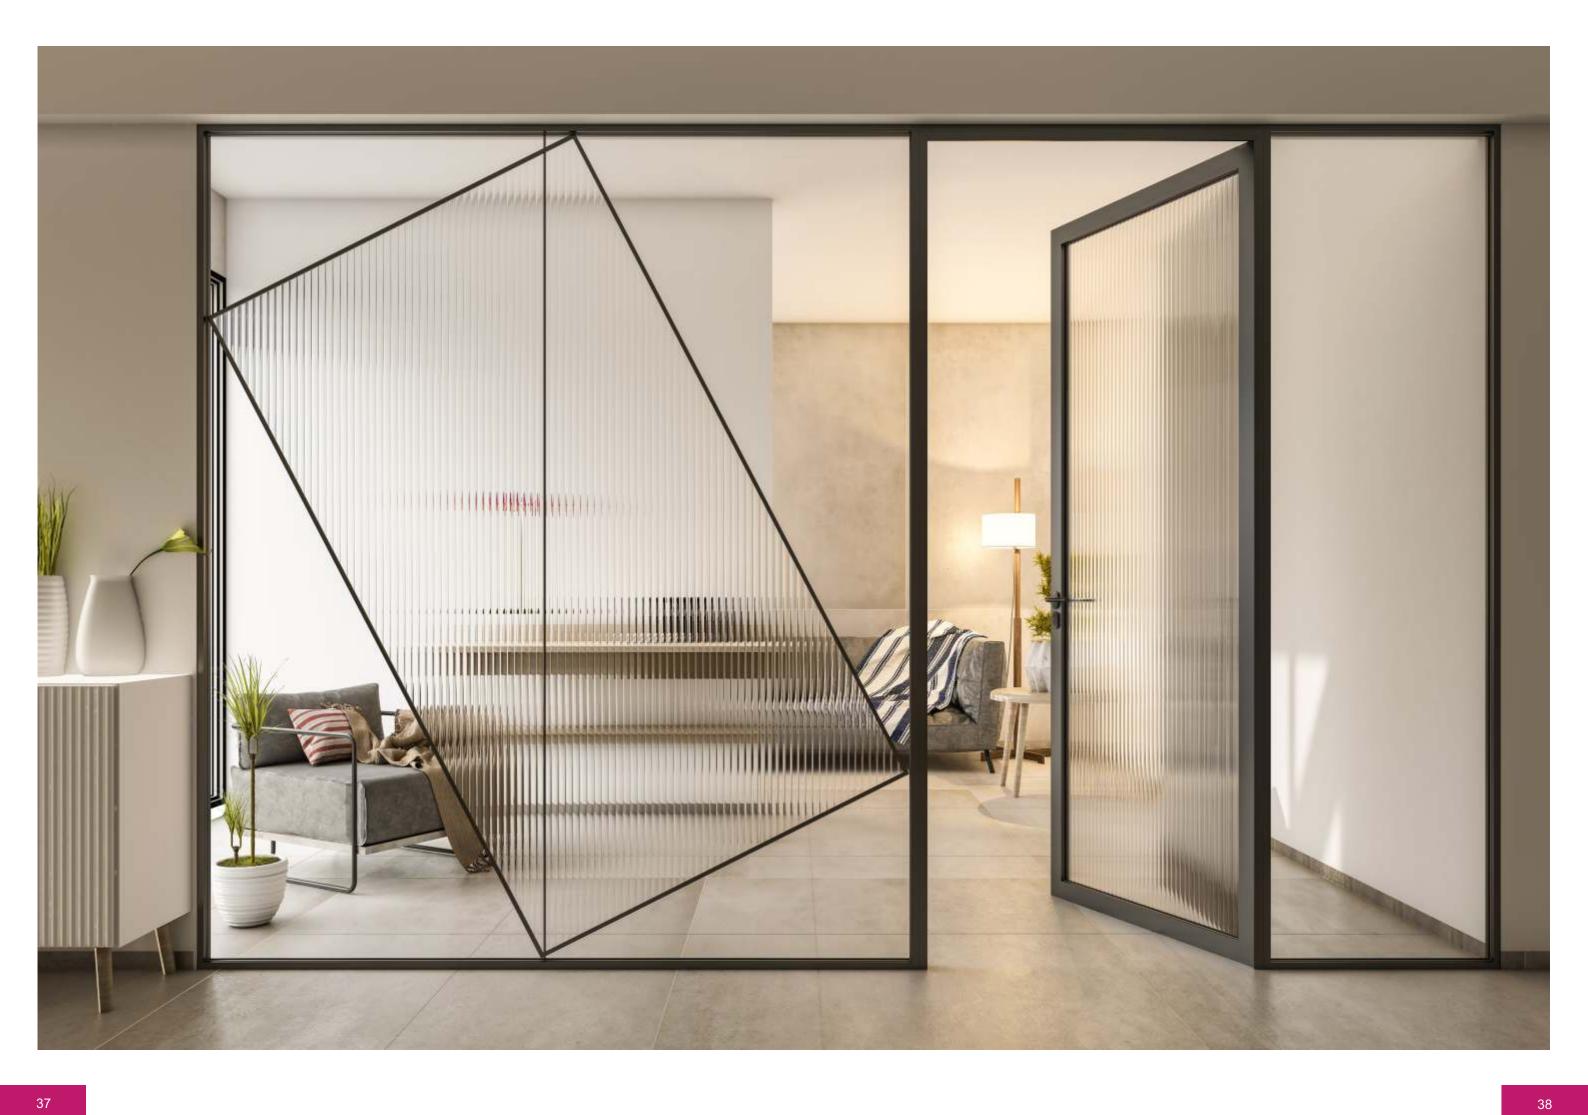


ZONE FOR A SAFER WORLD

K-LITE 100
100mm x 22mm (single glaze)





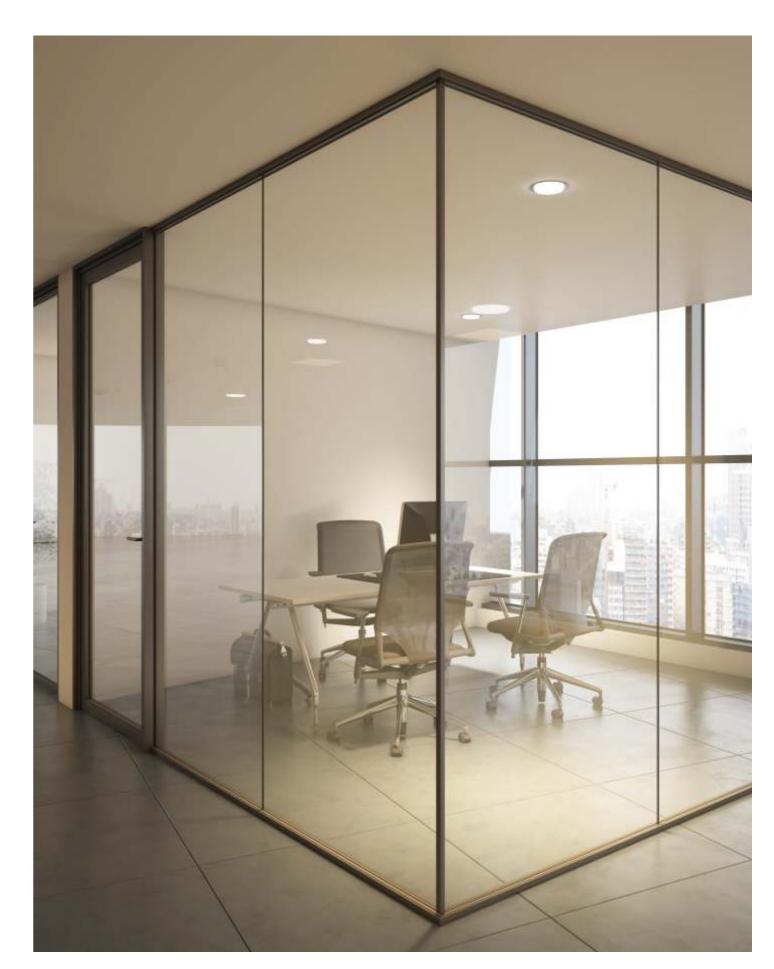









Technical Details

ELEGANT GLASS PARTITION FOR MAXIMUM TRANSPARENCY

The K-LITE 100 Demountable Architectural Office Partition is another superior range of K-LITE product that has a proven track record. It is based on a 100mm x 22mm glazing seal and bead with selection of door frame options.

Features

- Standard section: 100mm x 22mm
- Slim in design, the standard partition suite can be used with any stud thickness
- Suitable for 8mm / 10mm / 12mm toughened glass
- Single door frame sizes to allow for flush door 35mm or 45mm
- Partition height can be offered up to 3000mm
- Single glazed systems
- Sound insulation capacity of 32 34 dB

Door options

- Frame less glass, Stile glaze door, Timber or Sliding door system

Solid doors

- Timber doors can be of 44mm solid core in choice of veneers*

Door frames

- Aluminium full height up to 3000mm, doors are mounted on either of the hinges, pivots or sliding tracks. A range of Ironmongery can be supplied and incorporated with K-LITE 25 series.

Size limits

- K-LITE is designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium sections are anodized aluminium finish with 6063 T6 Grade

Assembly Characteristics


Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms. Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed accuracy of the installation and correct alignments of panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.


Available in two colors



 $\hbox{* Kindly consult Authorised K-LITE person before placing order or confirmation}\\$

Technical Details

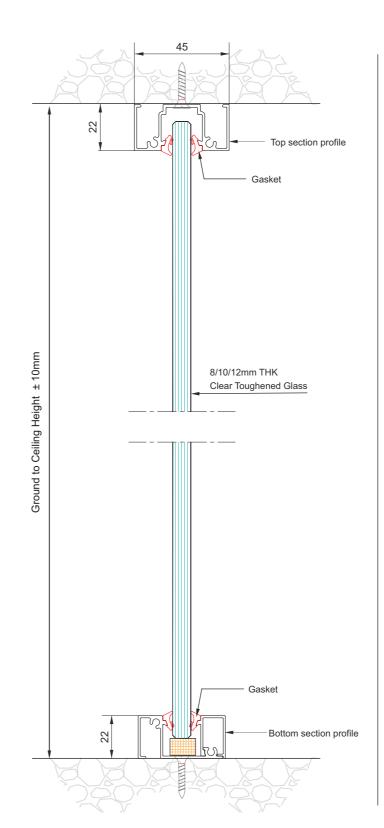

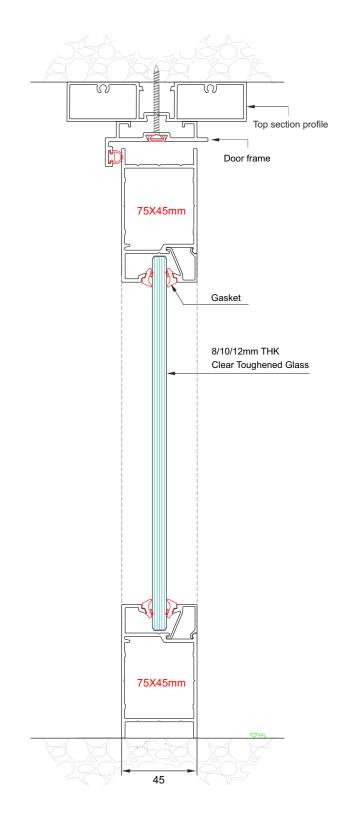

42










SOPHISTICATED ARCHITECTURAL DESIGN OPTION




Single Glazed Partition - 100mm x 22mm

THESE ARE THE OPTIONS FOR JOINING GLASS AT I, L & T JUNCTIONS

Suitable for 8mm / 10mm / 12mm toughened glass.

The profiles feature a double-sided adhesive tape that guarantee a perfect structural union and sound insulation.

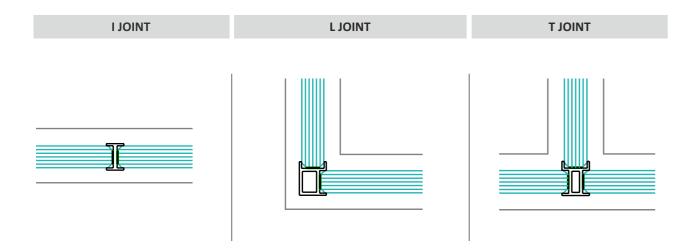











Door Configuration



K-LITE 45 Glazing with I joint and K-LITE 100 door frame.

Door :- Glass door with side hinges, Double D handle, bottom lock and Door closer.



Door Configuration



K-LITE 45 Glazing with I joint and K-LITÉ 100 door frame.

Door :- Glass door with side hinges, Studio lock and Door closer.

K-LITE 45 Glazing with I joint and K-LITE 100 door frame.

Door :- Glass door with side hinges, H handle, Bottom lock and Door closer.







K-LITE 45 Glazing with Stickon and K-LITE 100 Door Frame.

Door :- Stile 75 on Hinges with Stickon and Mortise lock and handle



K-LITE 45 Glazing with Stickon and K-LITE 100 Door Frame.

Door :- Stile 75 on Hinges with Stickon and Mortise lock and handle



with I joint and K-LITÉ 100 Door Frame.

K-LITE 45 Glazing

frame.

closer.

Door :- Stile 75 on Hinges with Mortise lock and handle



K-LITE 45 Glazing with I joint and K-LITÉ 100 Door Frame.

Door :- Stile 75 on Hinges with Mortise lock and handle







Door Configuration



K-LITE 45 Glazing with I joint and K-LITE 100 door frame.

Door :- Glass door with Top-Bottom Pivot, Double D handle and Bottom lock



Door Configuration



K-LITE 45 Glazing with I Joint and K-LITE 100 Door Frame.

Door :- Wooden Door with hinges, H handle and Door Closer.



Door :- Wooden Door with hinges, H handle and Door Closer.



K-LITE 45 Glazing with I joint and K-LITÉ 100 door frame.

Door :- Glass door with Top-Bottom Pivot, D handle and Bottom lock



K-LITE 45 Glazing with I joint and K-LITE 100 door frame.

Door :- Glass door with Top-Bottom Pivot and Studio lock







K-LITE 45 Glazing with I joint and K-LITÉ 100 door frame.

Door :- Glass door with Top-Bottom Pivot, H handle and Bottom lock







K-LITE 100 (100	mmx22mm)				
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - 45 - 001	K-LITE 45mm x 22mm Fix Profile	SET	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 45 - 002	K-LITE 45mm x 22mm Folding Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKLST - 001	Stickon Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 100 -001	K-LITE 100 Door Frame Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
W.	OZKL - PT - 001	Door Jamb for SD 60 and 35mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - PT - 002	Door Jamb for SD 75 and 45mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 100 - 005	Glass Clip For 100 x 100 Access Control Panel	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 100 - 002	100 x 100 Access Control Panel	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt

K-LITE 100 (100	Ommx22mm)				
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - 100 - 003	Cover Clip For 100 x 100 Access Control Panel	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - 100 - 004	Flush Clip For 100 x 100 Access Control Panel	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D60 - 101	SD 60 Vertical Profile 60 x 35	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D60 - 102	SD 60 Top-Bottom Profile 60 x 35	Pcs	2.1	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
5	OZKL - D75 - 103	SD 75 Vertical Profile 75 x 45	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D75 - 104	SD 75 Top-Bottom Profile 75 x 45	Pcs	2.1	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 8	I Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
1	OZKL - I - 10	I Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt







.ITE 100 (100mm					
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - I - 12	I Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
	OZKL - L - 8	L Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
	OZKL - L - 10	L Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
	OZKL - L - 12	L Joint for 12mm glass	Pcs	3	Silver MattBlack MattGold MattChampagne MaRose Gold Matt
	OZKL - T - 8	T Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
	OZKL - T - 10	T Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
	OZKL - T - 12	T Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt
2	OZKL - GASKET 001	Used for Door Frame Profile	RMTR	3	• Gray • Black

K-LITE 100 (100mmx22mm)					
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - GASKET 002-08	Gasket for 8mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 004-10	Gasket for 10mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 003-12	Gasket for 12mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 005	Gasket for Door Jamb	RMTR	3	• Gray • Black
	OZKL ACC 001	Corner Connector for Door Jamb	Pcs		
	OZKL ACC 002	Corner Connector for Glazing Profile	Pcs		
	OZKL ACC 003	Threaded Rod for Door 1mtr	SET		
	OZKL ACC 004	Threaded Rod for Door 2mtr	SET		



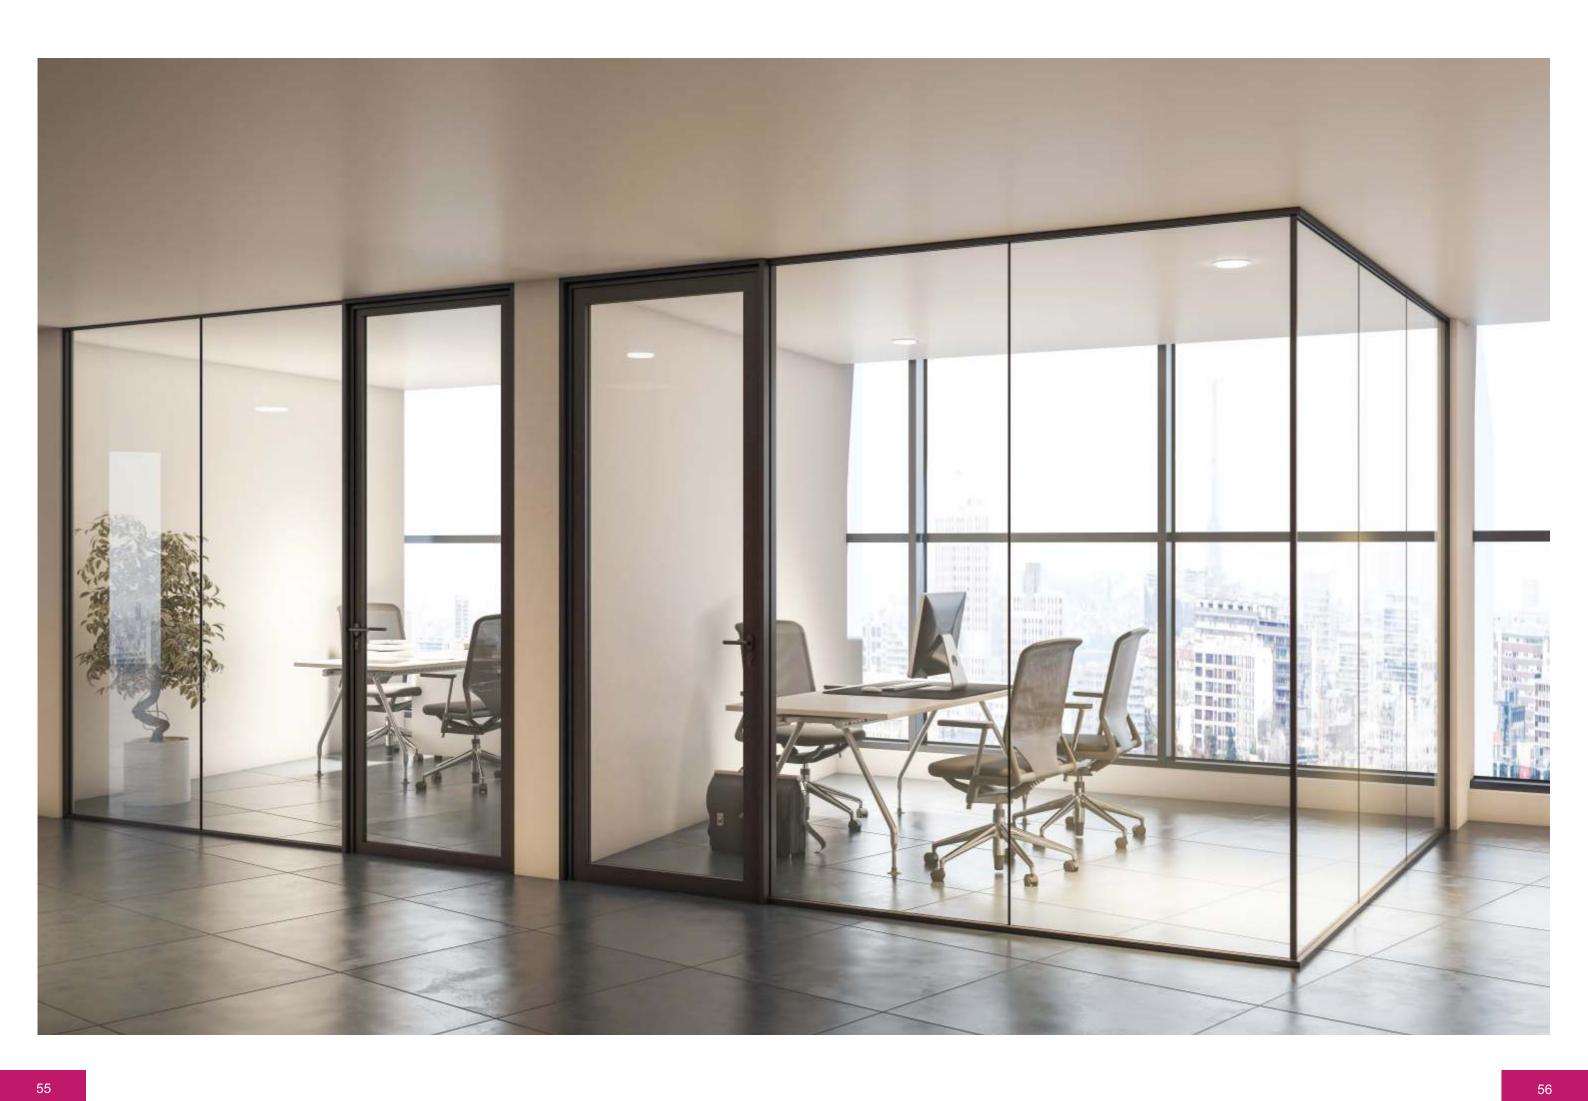






IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
and the same of th	OZKL ACC 005	Corner Joint for SD 75 when using Door Closer	Pcs		
	OZKLFT 10mm x 1mm x 10mtr	Acoustical Single Side Foam Tape	Roll		
P	OZKLCT 6mm x 1mm x 10mtr	Double Sided Acrylic Clear Tape used for I, L, T Joint	Roll		
0	OZKLCT 18mm x 0.8mm x 10mtr	Double Sided Acrylic Clear Tape used for BrooOZKLyn Profile	Roll		









75mm x 30mm (single glaze)













Technical Specification

CONTEMPORARY WORKING SPACES WITH FOCUS ON GLASS

The simple efficient functionality of K-LITE EF walls offer a built-in flexibility that responds to the constant rhythm of business change. With large selection of aesthetic choices, you can move beyond permanent dry wall solutions and rigid space planning to create a flexible and usable workspace solutions. These are ready to reconfigure and walls are easy to relocate for whatever change the future brings.

Features

- Demountable glass partition, 75mm thick
- Maximum height: 3000mm (depending on elevations), for bigger heights, reinforcement of the structure required
- Aluminium Profiles : Silver/Black anodized or RAL powder-coated
- Any configuration possible: Full height, Segmented, Segmented at door height, multi-transoms, etc.
- Cove visibility of 10mm on top and bottom
- Glazing seal (Gasket) available : Black & White
- Glass of 5mm or 6mm can be used according to the requirement

Hinged doors

- Laminated wooden door
- Aluminium-framed glass door

Options and accessories

- Blinds with horizontal or vertical slats
- Integration of light switches into the door jamb
- Automatic drop seal for wood, aluminium framed and glass doors
- Concealed door closer

Acoustics

- Glass wall: STC = from 38 to 44 dB - Door set: STC = from 34 to 38 dB

Size limits

- Designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium section are anodized aluminium finish with 6063 T6 Grade

Assembly Characteristics

Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms.


Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed and accuracy of the installation and correct alignments of the panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.

Available in two colors



* Kindly consult Authorised K-LITE person before placing order or confirmation

Single Glaze Option

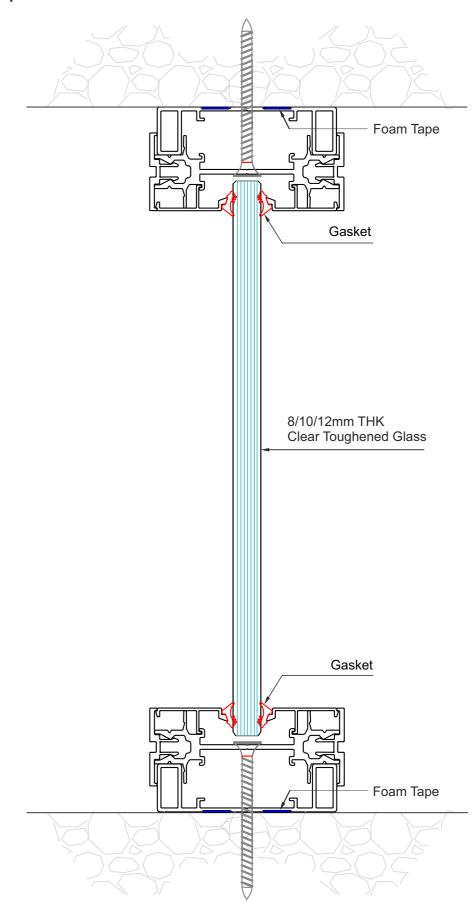


75mm x 30mm (Double glaze)





75mm x 30mm (Double glaze)



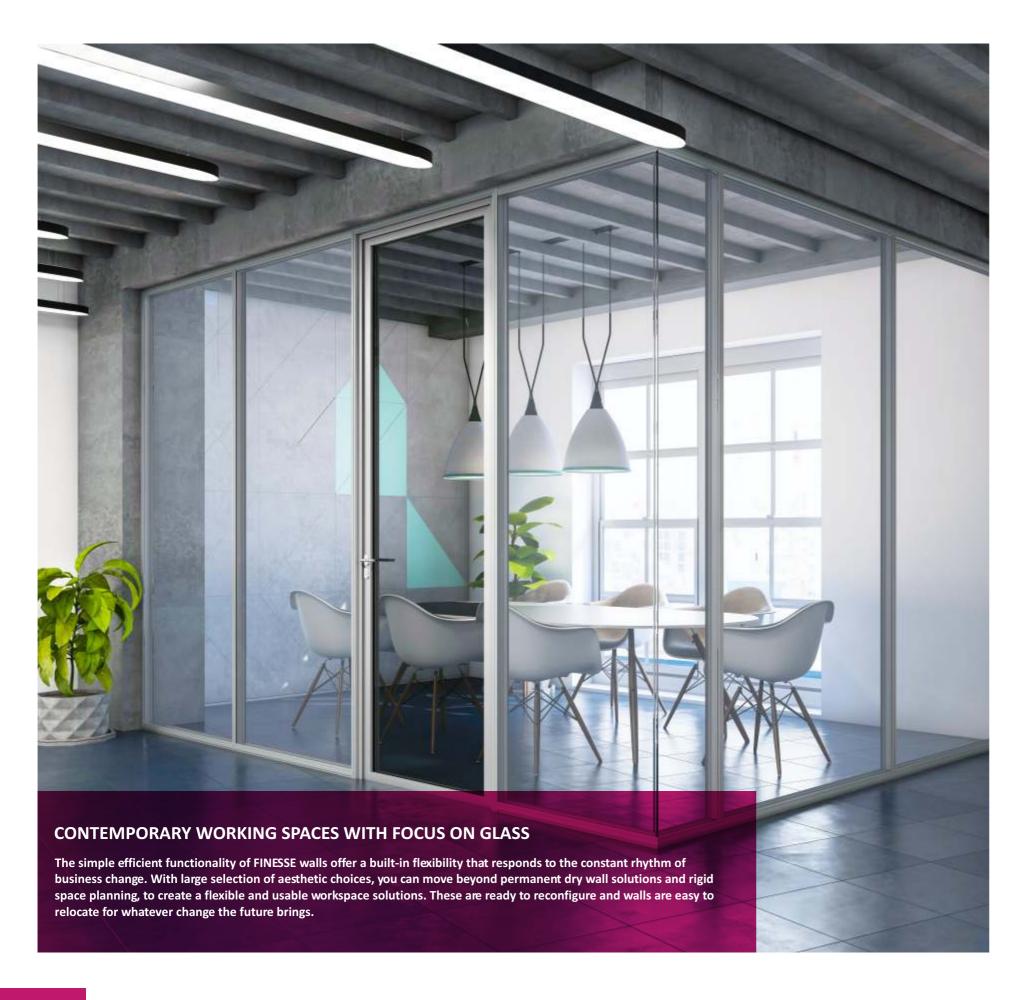











Technical Specification

CONTEMPORARY WORKING SPACES WITH FOCUS ON GLASS

The simple efficient functionality of K-LITE EF walls offer a built-in flexibility that responds to the constant rhythm of business change. With large selection of aesthetic choices, you can move beyond permanent dry wall solutions and rigid space planning, to create a flexible and usable workspace solutions. These are ready to reconfigure and walls are easy to relocate for whatever change the future brings.

Features

- Demountable glass partition, 75mm thick
- Maximum height: 3000mm (depending on elevations), for bigger heights, reinforcement of the structure required
- Aluminium Profiles : Silver/Black anodized or RAL powder-coated
- Any configuration possible : Full height, Segmented, Segmented at door height, multi-transoms, etc.
- Cove visibility of 10mm on top and bottom
- Glazing seal (Gasket) available : Black & White
- Glass of 5mm or 6mm can be used according to the requirement

Hinged doors

- Laminated wooden door
- Aluminium-framed glass door

Options and accessories

- Blinds with horizontal or vertical slats
- Integration of light switches into the door jamb
- Automatic drop seal for wood, aluminium framed and glass doors
- Concealed door closer

Acoustics

- Glass wall: STC = from 30 to 35 dB - Door set: STC = from 28 to 30 dB

Size limits

- Designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium section are anodized aluminium finish with 6063 T6 Grade


Assembly Characteristics

Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms. Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed and accuracy of the installation and correct alignments of the panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.

Available in two colors



Double Glaze Option

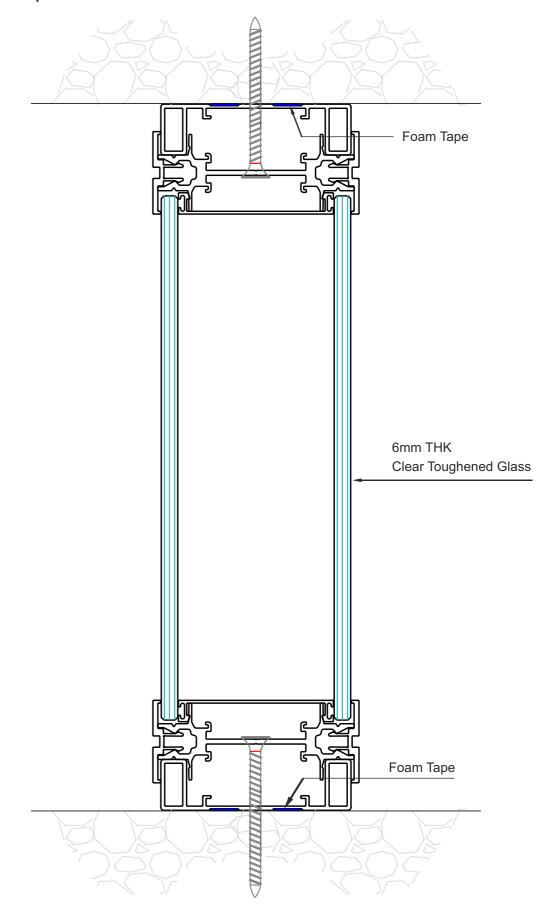

^{*} Kindly consult Authorised K-LITE person before placing order or confirmation

75mm x 30mm (Wooden)





75mm x 30mm (Wooden)





CONTEMPORARY WORKING SPACES WITH FOCUS ON GLASS

The simple efficient functionality of K-LITE EF walls offer a built-in flexibility that responds to the constant rhythm of business change. With large selection of aesthetic choices, you can move beyond permanent dry wall solutions and rigid space planning, to create a flexible and usable workspace solutions. These are ready to reconfigure and walls are easy to relocate for whatever change the future

Features

- Demountable glass partition, 75mm thick
- Maximum height: 3000mm (depending on elevations), for bigger heights, reinforcement of the structure required
- Aluminium Profiles : Silver/Black anodized or RAL powder-coated
- Any configuration possible : Full height, Segmented, Segmented at door height, multi-transoms, etc.
- Cove visibility of 10mm on top and bottom
- Glazing seal (Gasket) available: Black & White
- Glass of 5mm or 6mm can be used according to the requirement

Hinged doors

- Laminated wooden door
- Aluminium-framed glass door

Options and accessories

- Blinds with horizontal or vertical slats
- Integration of light switches into the door jamb
- Automatic drop seal for wood, aluminium framed and glass doors
- Concealed door closer

Acoustics

- Glass wall: STC = from 30 to 35 dB - Door set: STC = from 28 to 30 dB

Size limits

- Designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm

Finish

- All exposed aluminium section are anodized aluminium finish with 6063 T6 Grade


Assembly Characteristics

Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms. Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed and accuracy of the installation and correct alignments of the panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.

Available in two colors



Black Silver

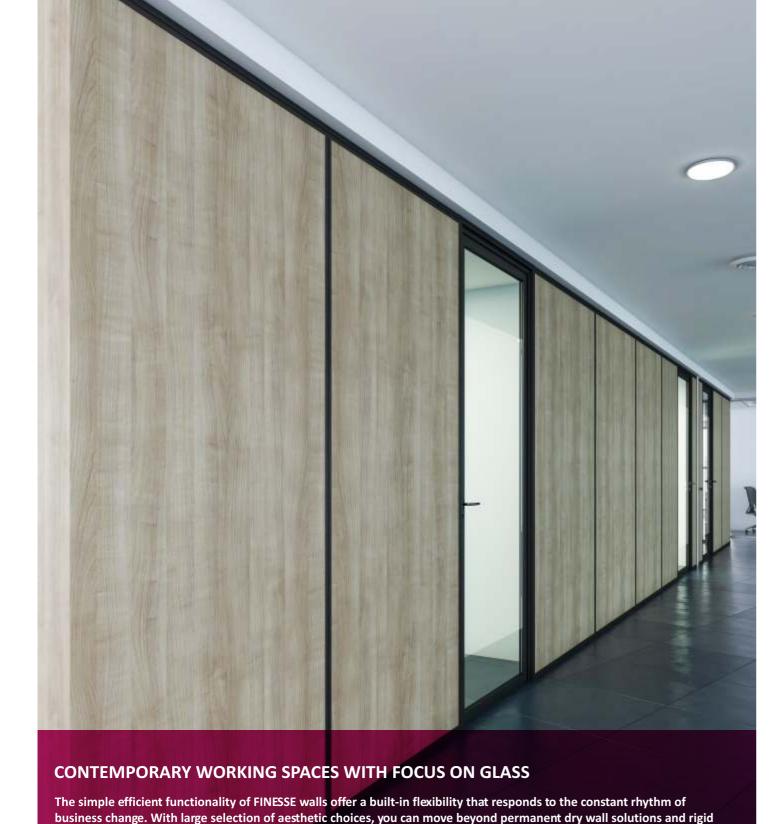

space planning, to create a flexible and usable workspace solutions. These are ready to reconfigure and walls are easy to

relocate for whatever change the future brings.


^{*} Kindly consult Authorised K-LITE person before placing order or confirmation









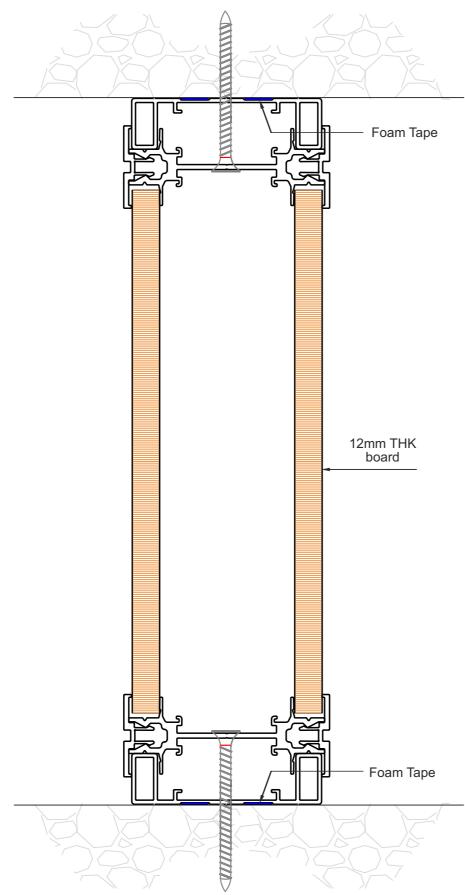



K-LITE EF 75Glazing with segmented partition. Door :- Glass door with side hinges, D handle, bottom lock and Door closer.

K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, Studio lock and Door closer.





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, H handle, bottom lock and Door closer.



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, Double D handle, bottom lock and Door closer.





K-LITE EF 75

75mm x 30mm





K-LITE EF 75 Glazing with segmented partition.

Door :- Stile 75 on Hinges with Mortise lock and handle



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, H handle and Bottom lock.



K-LITE EF 75 Glazing with segmented partition.

Door :- Stile 60 on Hinges with Mortise lock and handle



Ecofinesse Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, D handle and Bottom lock.



69

K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, Double D handle and Bottom lock.



K-LITE EF 75 Glazing with segmented partition.

Door :- Wooden Door with hinges, H handle and Door Closer.





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot and Studio lock



70



K-LITE EF 75

75mm x 30mm





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Side hinges, Door closer, Double D handle and Bottom lock.



K-LITE EF 75Glazing with segmented partition.

Door :- Stile 75 on Hinges with Mortise lock and handle



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Side hinges, Studio Lock and Door closer



K-LITE EF 75 Glazing with segmented partition.

Door :- Stile 60 on Hinges with Mortise lock and handle



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot and Studio Lock



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, Double D handle and Bottom lock.





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Side hinges, Door closer, D handle and Bottom lock.





K-LITE EF 75

75mm x 30mm





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, D handle and Bottom lock.




K-LITE EF 75Glazing with segmented partition.

Door :- Glass door with side hinges, D handle, bottom lock and Door closer.



K-LITE EF 75 Glazing with segmented partition.

Door :- Wooden Door with hinges, H handle and Door Closer.

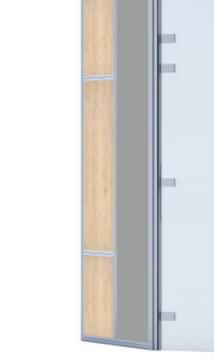


K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, Double D handle, bottom lock and Door closer.



K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, Stuido lock and Door closer.

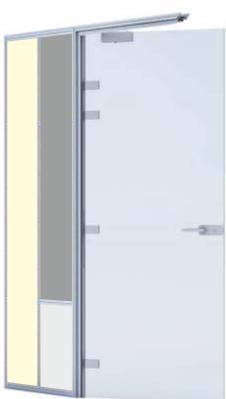

K-LITE EF 75 Glazing with segmented partition.

Door :- Stile 60 on Hinges with Mortise lock and handle





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with side hinges, H handle, bottom lock and Door closer.







75mm x 30mm





K-LITE EF 75 Glazing with segmented partition.

Door :- Glass door with Top-Bottom Pivot, Double D handle and Bottom lock.



K-LITE EF 75 Glazing

Door :- Wooden Door with hinges, H handle and Door Closer.



K-LITE EF 75 Glazing.

Door :- Glass door with Top-Bottom Pivot and Studio Lock



K-LITE EF 75 Glazing with segmented partition.

Door :- Wooden Door with hinges, H handle and Door Closer.



Glazing.

Door :- Glass door with Top-Bottom Pivot, D handle and Bottom Lock



K-LITE EF 75



Door :- Glass door with Top-Bottom Pivot, H handle and Bottom Lock









IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKLEF - 001	Top-Bottom Levelling Profile	SET	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKLEF - 002	Mullion	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKLST - 001	Stickon Profile	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKLEF - 003	Common Outer Clip	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKLEF - 004	Single Glaze Clip	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKLEF - 005	Double Glaze Clip	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
	OZKL - PT - 001	Door Jamb for SD 60 and 35mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Mat Rose Gold Matt
7	OZKL - PT - 002	Door Jamb for SD 75 and 45mm Solid Door	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Ma Rose Gold Matt

K-LITE 75 (75mmx30mm)					
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - D60 - 101	SD 60 Vertical Profile 60 x 35	Pcs	3	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
	OZKL - D60 - 102	SD 60 Top-Bottom Profile 60 x 35	Pcs	2.1	Silver MattBlack MattGold MattChampagne MattRose Gold Matt
	OZKL - D75 - 103	SD 75 Vertical Profile 75 x 45	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - D75 - 104	SD 75 Top-Bottom Profile 75 x 45	Pcs	2.1	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 8	I Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 10	l Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - I - 12	l Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 8	L Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt








K-LITE 75 (75m	nmx30mm)				
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - L - 10	L Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - L - 12	L Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 8	T Joint for 8mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 10	T Joint for 10mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
	OZKL - T - 12	T Joint for 12mm glass	Pcs	3	 Silver Matt Black Matt Gold Matt Champagne Matt Rose Gold Matt
1	OZKL - GASKET 001	Used for Door Frame Profile	RMTR	3	• Gray • Black
	OZKL - GASKET 002-08	Gasket for 8mm glass	RMTR	3	• Gray • Black
	OZKL - GASKET 004-10	Gasket for 10mm glass	RMTR	3	GrayBlack


K-LITE 75 (75mm	x30mm)				
IMAGE	K-LITE CODE	DESCRIPTION	UNIT	SIZE	COLOUR
	OZKL - GASKET 003-12	Gasket for 12mm glass	RMTR	3	GrayBlack
	OZKL - GASKET 005	Gasket for Door Jamb	RMTR	3	GrayBlack
	OZKL ACC 001	Corner Connector for Door Jamb	PCS		
\(\)	OZKL ACC 002	Corner Connector for Glazing Profile	PCS		
	OZKL ACC 003	Threaded Rod for Door 1mtr	SET		
0	OZKL ACC 004	Threaded Rod for Door 2mtr	SET		
Por Borney Control	OZKL ACC 005	Corner Joint for SD 75 when using Door Closer	Pcs		
	OZKL ACC 006	Floor Level for Eco Finesse	Pcs		
0	OZKLFT 10mm x 1mm x 10mtr	Acoustical Single Side Foam Tape	Roll		
P	OZKLCT 6mm x 1mm x 10mtr	Double Sided Acrylic Clear Tape used for I, L, T Joint	Roll		
0	OZKLCT 18mm x 0.8mm x 10mtr	Double Sided Acrylic Clear Tape used for BrooOZKLyn Profile	Roll		

ZONE STOR A SAFER WORLD





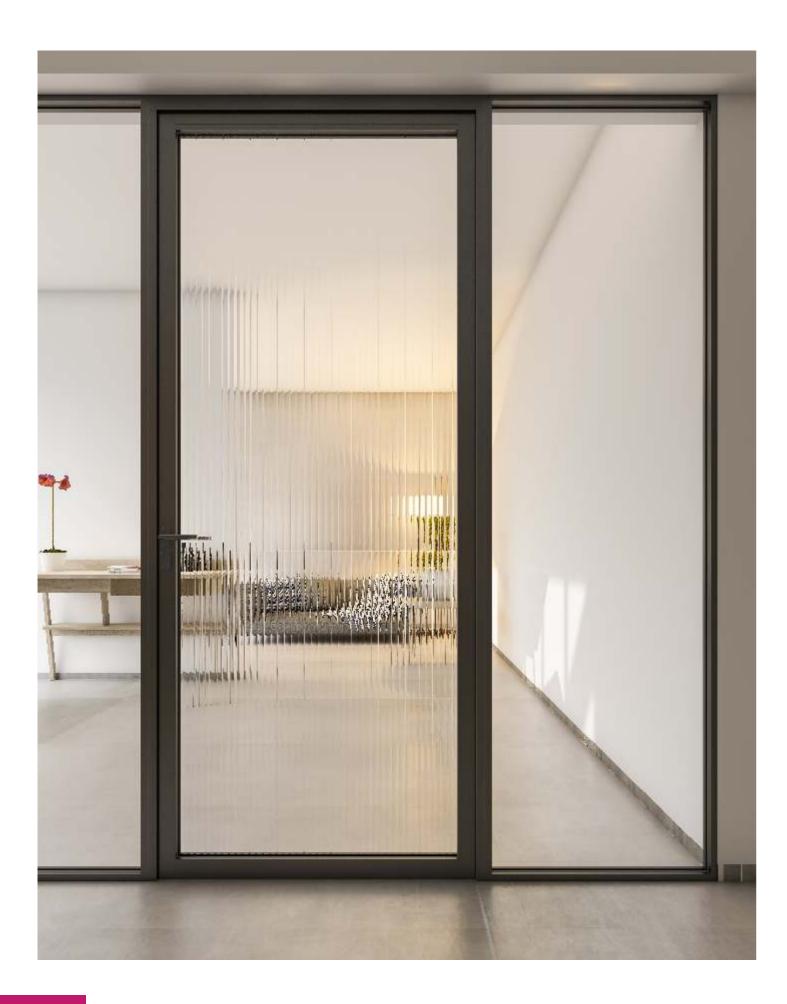

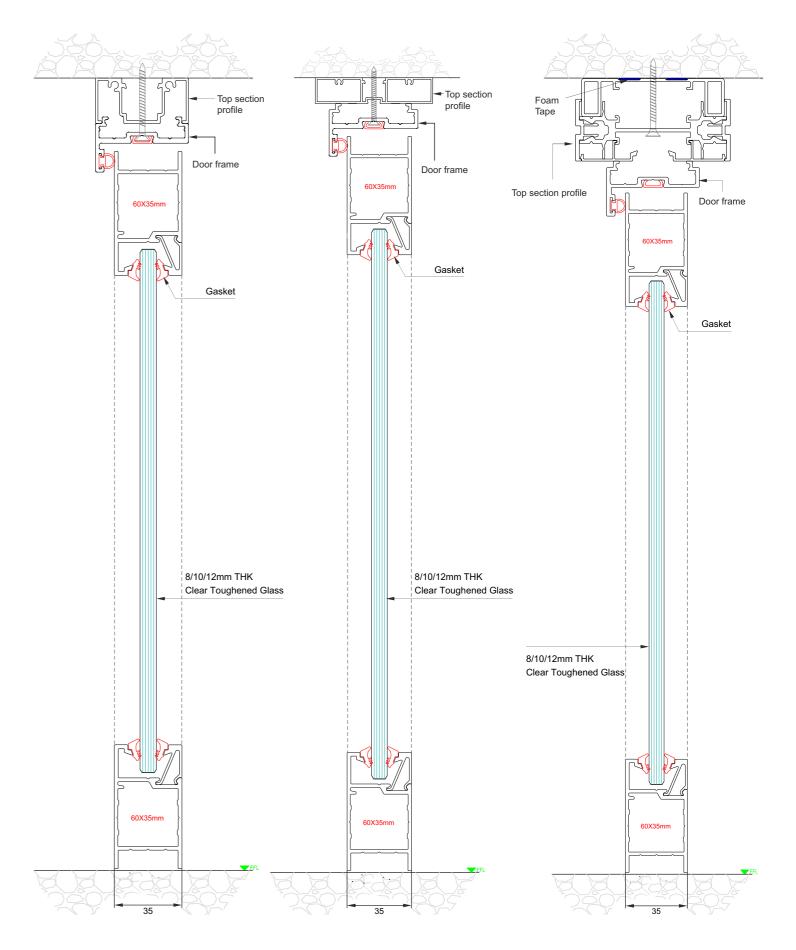


ZONE® FOR A SAFER WORLD







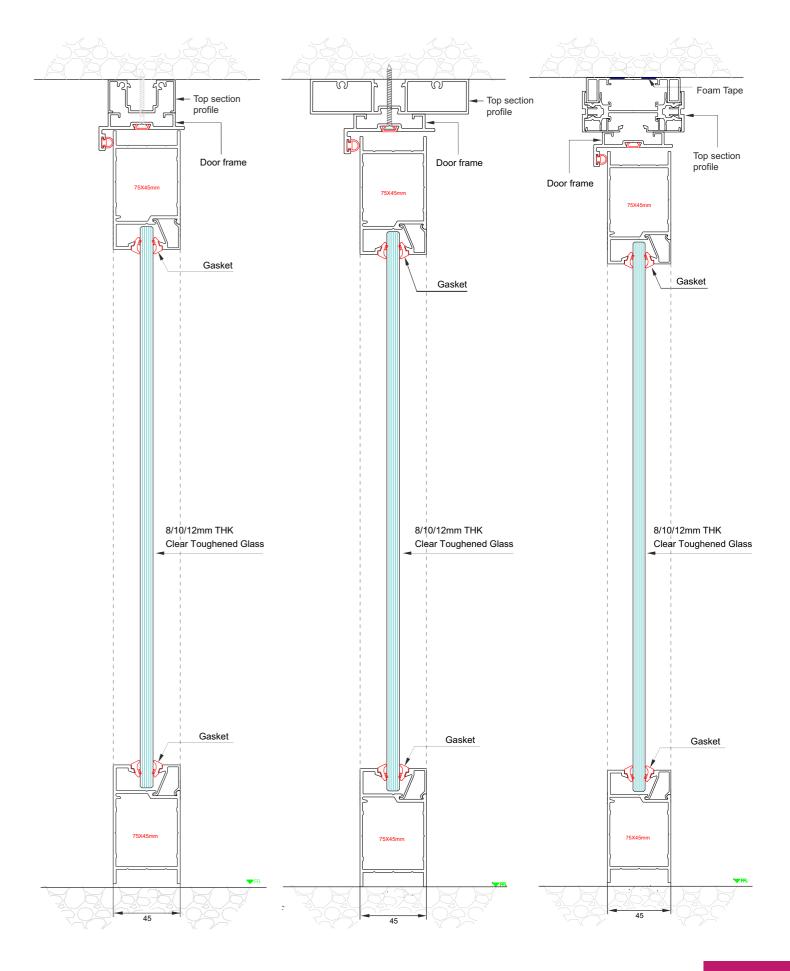











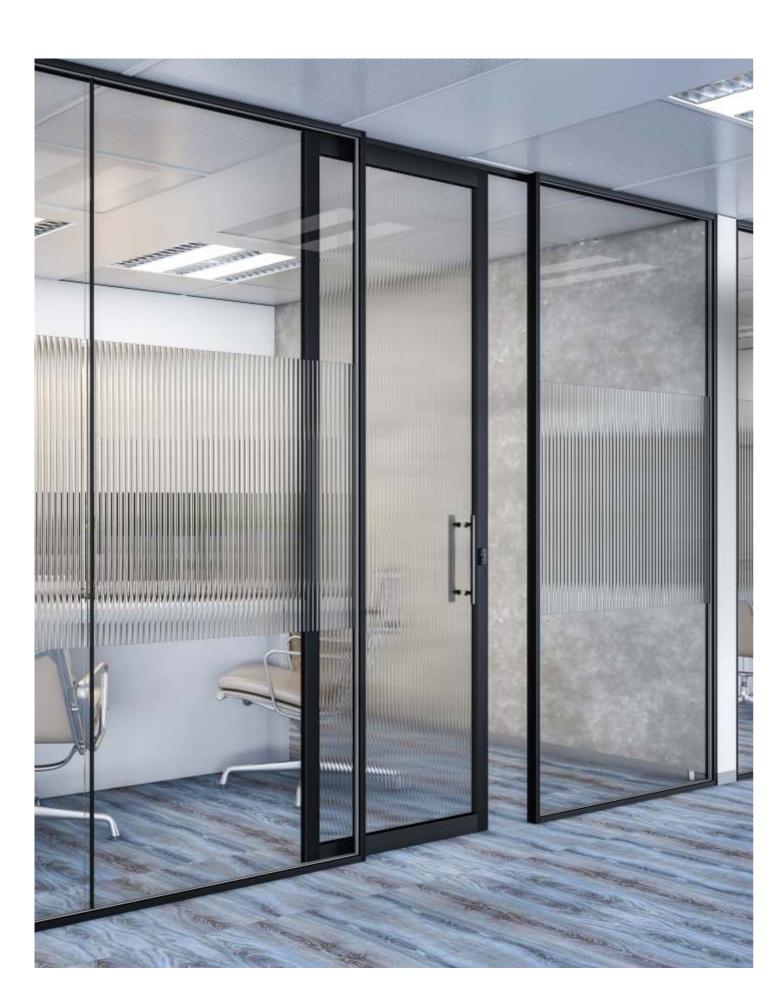



Sliding door system enables glass doors to retain their minimalist aesthetics.

Sliding glass doors provide huge space benefit and minimalist design. When combined with proven roller technology, it ensures that even high doors can be operated smoothly and with ease.

The doors are gently decelerated and reliably hold in both their closed and opened states by specially developed catch type buffers.

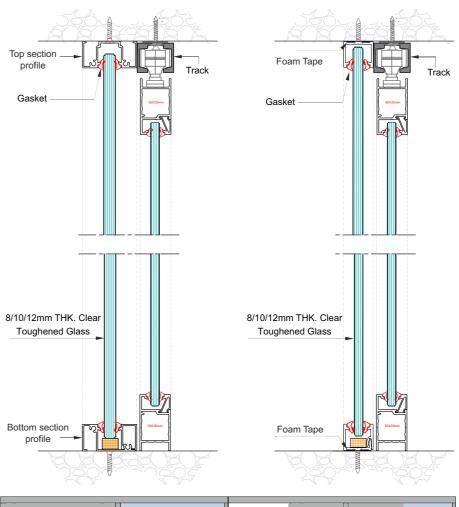

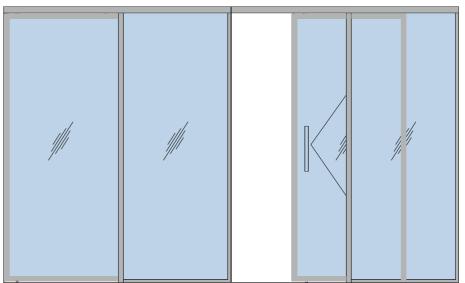

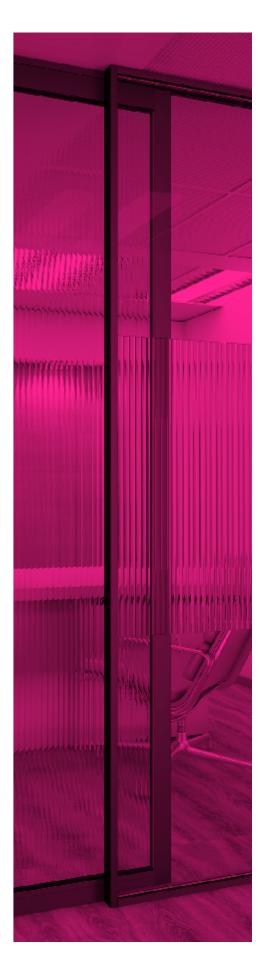



ZONE STATE WORLD















Single & Double Glazing

Primarily, K-LITE offers 3 types of Panels as standard design assembling, available with existing K-LITE Demountable Partition Series. Apart from these, we can also provide exclusive service for more distinctive designs as and when required by the client.


Panels available are as follows: 45 x 50 series (Compact series) 80 x 80 series (Eta Portal) 100 x 100 series (Eco line Portal)

K-LITE Tech panels not only provide acoustic values, which strengthen the integrity of the room, but also conceal all power and data cables required for electrical switches/devices, embedded within the Tech panel face.


Ideally, room booking systems are mounted on an adjacent wall outside meeting room, which can be problematic. If the meeting room front is of glass construction, wiring and fixing cables cannot be kept open. With K-LITE Tech panels, things become easy since all cabling gets concealed within the cavity to meet the aesthetics and usability.

Meeting rooms are mostly occupied for multiple meetings and conference spaces. These K-LITE Tech panels provide the necessary tools for booking system. This piece of technology allows people to see if a meeting room is available or in use, as well as view the information in meeting scheduler about the meeting which is going to take place in that cabin.

Available with 2 finish: Anodised Aluminium and Matt Black, readily available at any given point off the shelf.



45 x 50 series (Compact series)

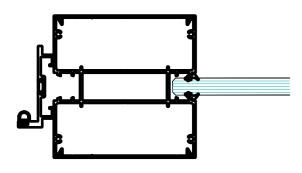

100 x 100 series (Eco line Portal)




Sophisticated design and functional quality are the characteristics of K-LITE fittings. They excel in terms of both technology and operating reliability, manufactured from high grade materials which are carefully crafted. K-LITE door hinges satisfies demands with respect to stability, safety and corrosion resistance.


OZKLPH 001 - AL
OZKLPH 001 - BK
Glass Door Hinges (Square)

Max. door height: 2700mm

K-LITE material consists of alloy material. Hinges comes in brush aluminium finish. For glass thickness: 10mm to 12mm Max. door weight: 50 Kgs / Pair Max. door width: 900mm







Cut-out detail

Available Finish:


K-LITE pivot series reflect charm and neatness with their simple and minimal visibility, to enhance the inherent beauty and character for toughened frame less glass doors.


OZ-PGDH STD BM OZ-PGDH STD SSS Glass Door Pivot Hinges (Square)

Max. door height: 2700mm

K-LITE material consists of alloy material. Hinges comes in brush aluminium finish. For glass thickness: 10mm to 12mm Max. door weight: 50 Kgs / Pair Max. door width: 900mm







Available Finish:













From the inception, K-LITE has been devoted to developing new and innovative products in the tradition of the finest design and craftsmanship.

> **OZ-DP 1/2-GDL STD BM OZ-DP 1/2-GDL STD AN Glass Door Studio Lock**

K-LITE material consists of Alloy material. Hinges comes in Aluminium finish. For glass thickness: 10mm to 12mm





Security, being a prime concern, what would be better than a bottom patch lock which takes care of it elegantly. K-LITE not only have a regular bottom lock, but with aluminium finish to give it a neat look.

OPL-1 BM OPL-1 AN Glass Bottom Lock

K-LITE material consists of Alloy material. Lock comes in Black finish & Stainless Steel finish. For glass thickness: 10mm to 12mm







Available Finish:




Available Finish

Sophisticated design and functional quality are the characteristics of the K-LITE fittings. K-LITE hardware includes the most popular model, all of which are right or left spring, in order to return the lever handle to the horizontal position. K-LITE hardware is suitable for standard, national and international applications eg. commercial spaces, school, mall segment and interior doors in office buildings.


OMH-11LN STD SSS Mortise Handle

K-LITE material consists of SUS 304. Lever Handle in Stainless Steel finish. Suitable for Aluminium Frame Doors & Flush Doors. Available with oval shape rosettes.

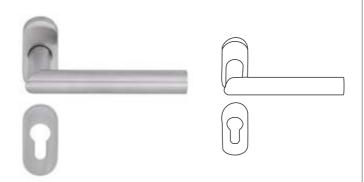

OMH-33N STD SSS Mortise Handle

K-LITE material consists of SUS 304. Lever Handle in Stainless Steel finish. Suitable for Aluminium Frame Doors & Flush Doors. Available with oval shape rosettes.

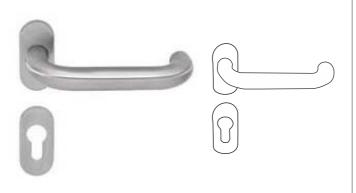

Available Finish:



OZKLKH - 001 **Oval Key Hole**

Material: SS SUS 304 Oval Key Hole Use For Dead Lock.






OMC-11-K2N-P-60/70/80MM SN Cylinder

Material: SS SUS 304

Supplied with 5 keys computerised. Size: 60mm / 70mm.

One side knob + One side key.



Available Finish:



OZ-DST-11 **Door Stopper**

Ideal solution to stop door from going further more than required. Half moon type door stopper.


Material: SUS 304



Available Finish















They may not be apparent at first sight, but once noticed, it's visual impact is unmistakable.

K-LITE handles enhance the allure of any door. Individual and versatile.



OGH-55 25X450 SSS OGH-55 25X600 SSS **Glass Door Handle**

K-LITE material consists of SUS 304 Material. Hinges comes in Stainless Steel finish. For glass thickness :10mm to 12mm Size:300mm















OGH-11S 25X325 SSS **OGH-11S 25X450 SSS** OGH-11S 25X600 SSS **Glass Door Handle**


K-LITE material consists of SUS 304 Material. Hinges comes in Stainless Steel finish. For glass thickness :10mm to 12mm Size:300mm












OGH-11 Glass Door Handle

K-LITE material consists of SUS 304 Material. Hinges comes in Stainless Steel finish. For glass thickness :10mm to 12mm Size:300mm











OZ-2BB-FP 5X3X3 SSS

K-LITE flush hinges comes in SUS 304. Hinges comes in Stainless Steel finish.

design gives an extra edge against regular fittings.

Weight: 60 Kgs / Pair Size: 100mm

Flush Hinges

Note: Colour option available as required.



Available Finish:

OZKLFH - 5303 - SS OZKLFH - 5303 - BK

Flush Hinges


K-LITE solid door hinges are superb in quality due to its latest mechanism and corrosion proof metal with SUS 304 grade quality. It's


K-LITE flush hinges comes in SUS 304. Hinges comes in Stainless Steel finish.

Weight: 50 Kgs / Pair Size: 120mm

Note: Colour option available as required.







Available Finish












K-LITE solid door hinges are superb in quality due to its latest mechanism and corrosion proof metal with SUS 304 grade quality. It's design gives an extra edge against regular fittings.

OML-33A-35X85MM SSS OML-33A-30X85MM SSS Mortise Lock Body

K-LITE Mortise Body comes in SS Material. Suitable for Aluminium Frame Doors & Flush Doors. Door Thickness: 35mm to 50mm






Available Finish : Black Sta

KLDL - 1130 - SS / BK KLDL - 1135 - SS / BK Dead Lock Body

K-LITE LITE Dead Body comes in SS Material. Suitable for Aluminium Frame Doors & Flush Doors. Door Thickness: 35mm to 50mm









NSK-ACC-980-PLATE STD SILVER NSK-ACC-780-PLATE STD SILVER Overhead Door Closer Glass Clamp


Overhead door closer glass clamp is used along with sliding arm door closer. Material : Aluminium Glass Thickness : 10mm to 12mm Finish : Silver / Black Available for Geze & Ozone door closer



OZKLAP - 01 Specially designed Amateur Plate

Used between door closer & glass clamp to fill the gap.



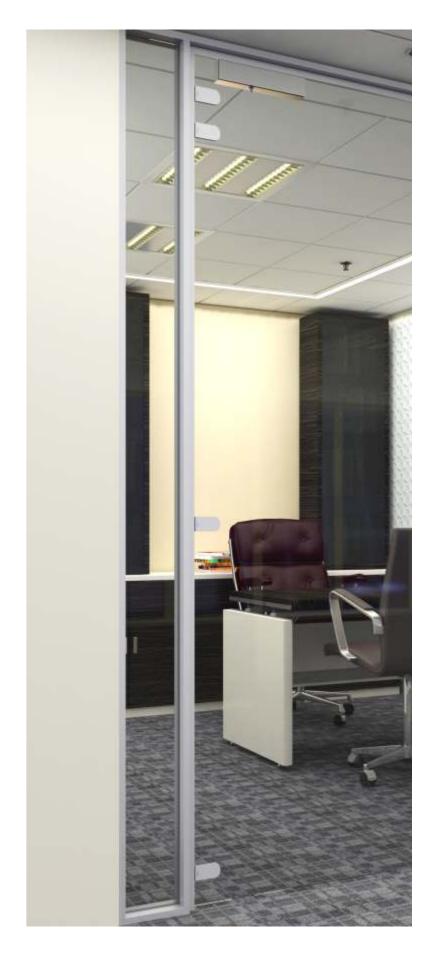













KS - 50 AL / 75 AL / 100 AL Easy Fix

- Designed to be installed on walls, gypsum and plywood partitions,
- and on top of all kinds of flooring
- Installed using screws, to camouflage the rivet points
- A capping strip is provided in PVC matching colour
- Supplied with protection tap which will be removed after completion
- Height : 50mm / 75mm / 100mm
- Length : 3000mm



Available Finish:


IMPORTANT





KS - STICK - 60 / 80 / 100 Easy Stick

- Sleek design of profile gives a recessed look
- The capped design of the profile, covers wall to floor expansion gap, making it an ideal profile section for tiled / wooden floor covering
- This profile sections are installed using high tack adhesive making the installation fast and easy on any surface, including plywood and gypsum partitions
- Matching outer corner, inner corner and its end cap, completes the range $% \left(1\right) =\left(1\right) \left(1\right)$
- Height : 60 mm / 80 mm / 100 mm
- Length : 3000mm

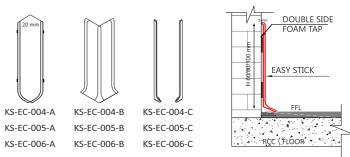

IMPORTANT

Pay attention to the external edges of aluminium skirting. They must be avoided using against agents such as adhesives, sealants and against grinding or scraping actions.










KS - HR - 40 / 60 Hairline Recessed

- Hairline recessed is a skirting designed to be flushed to the wall
- Provides a sleek and elegant look
- Hairline recessed along with cove recessed are ideal combination of skirting for offices where dry wall partitions are created along the periphery on civil walls
- Height: 40mm / 60mm
- Length : 3000mm







Pay attention to the external edges of aluminium skirting. They must be avoided using against agents such as adhesives, sealants and against grinding or scraping actions.



KCG - 150 AL Chair Guard

- Chair guard provides the first line of defense against everyday abuse in high traffic areas, in office wall protection, medical facilities wall protection and sports venues protection
- Using K-LITE chair guard can dramatically reduce maintenance and repair expense over time
- Matching outer corner and its end cap completes the range
- Height : 150mm
- Length : 3000mm






IMPORTANT

Pay attention to the external edges of aluminium skirting. They must be avoided using against agents such as adhesives, sealants and against grinding or scraping actions.



KS - Z - 001 Z Pro


- Z pro profile is for transition with carpet / vinyl to any other surface
- Variable designed double sided profile which bends as per the height of the flooring on either side
- No screw visible on top surface, giving it a smooth finish
- Height : 28mm
- Length: 3000mm





KS - Z - 002 Twin Edge Pro

- Two piece edge profile, the top is clipped on the base
- Suitable for floorings such as ceramic, wood and wood laminate $\,$
- The profile allows room for expansion of natural floor coverings
- No screw visible on top surface, giving it a smooth finish
- Height : 38mm
- Length : 3000mm












KS - FLEXI - 30 Transition

- Profile can be used as edging for laminate, parquet and hard floors or as a junction to other types of flooring which are variable in heights
- Transition profiles are clipped on to the floor, by inserting specially developed
- screws and floor plugs in designed holes at random intervals
- No screws visible on top surface, giving it a smooth finish
- Height : 30mm
- Length : 3000mm










KS - CG - 12 / 15 / 19 / 25 / 38 Corner Guard


- Corner guard provides protection to outside wall corners
- Economical yet durable option for corner protection
- Wings are tapered at the edge for excellent finish
- Available with tape for easy and fast installation
- Width : 12mm x 12mm / 15mm x 15mm / 19mm x 19mm 25mm x 25mm / 38mm x 38mm
- Length: 3000mm





KS - SN - 01 / 02 / 03 Stair Nose

- Stair nose provides a fast, permanent anti-slip surface to the front edge to all types of stair surfaces, even in adverse conditions such as the presence of water or oil
- K-LITE stair nosing is designed to meet luminance and also for slip resistance
- Manufactured from non-corrosive, high quality anodised aluminium
- Bonding system adheres to all types of surface and eliminates metal vibration
- Supplied with tape for easy and fast installation
- Size: 24mm x 09mm / 48mm x 29mm / 68mm x 29mm
- Length: 3000mm

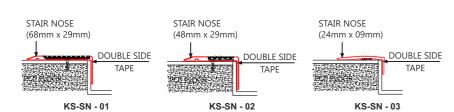






Available Finish : Black Silve

KS - GYP - COVER - 75 / 100 Gypsum Cover

- To cover naked dry gypsum walls of 75mm/100mm
- Supplied in length of 3000mm, the profile can be cut to the required size
- Finish : Anodised Aluminium/Black
- For Edge Protection of Gypsum walls, to use as a door frame
- Width: 75mm/100mm
- Depth : 10mm
- Length : 3000mm







102










KS - HAT - 5 / 8 / 10 **Hat Section**

- Decorative profiles are developed to make wall design visually attractive
- Decorative profiles make complex detailing easy
- Protects the corners and edges
- Ideal for junction of two different materials installed on the wall
- Width : 5mm / 8mm / 10mm
- Length : 3000mm

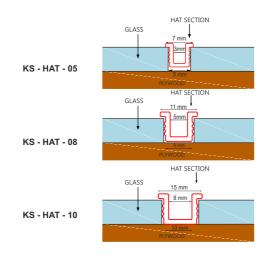










Available Finish:

KS - PT - 011

Recessed Pen Tray / Recessed Utility Tray

- Recessed pen and duster holder for dry wall partitions
- Supplied in length of 3000mm, the profile can be cut to the required size
- Finish : Anodised aluminium
- Matching aluminium end caps are available for edges (KS-EC-10)
- Height : 75mm - Depth : 60mm - Length: 3000mm
























Profile Color












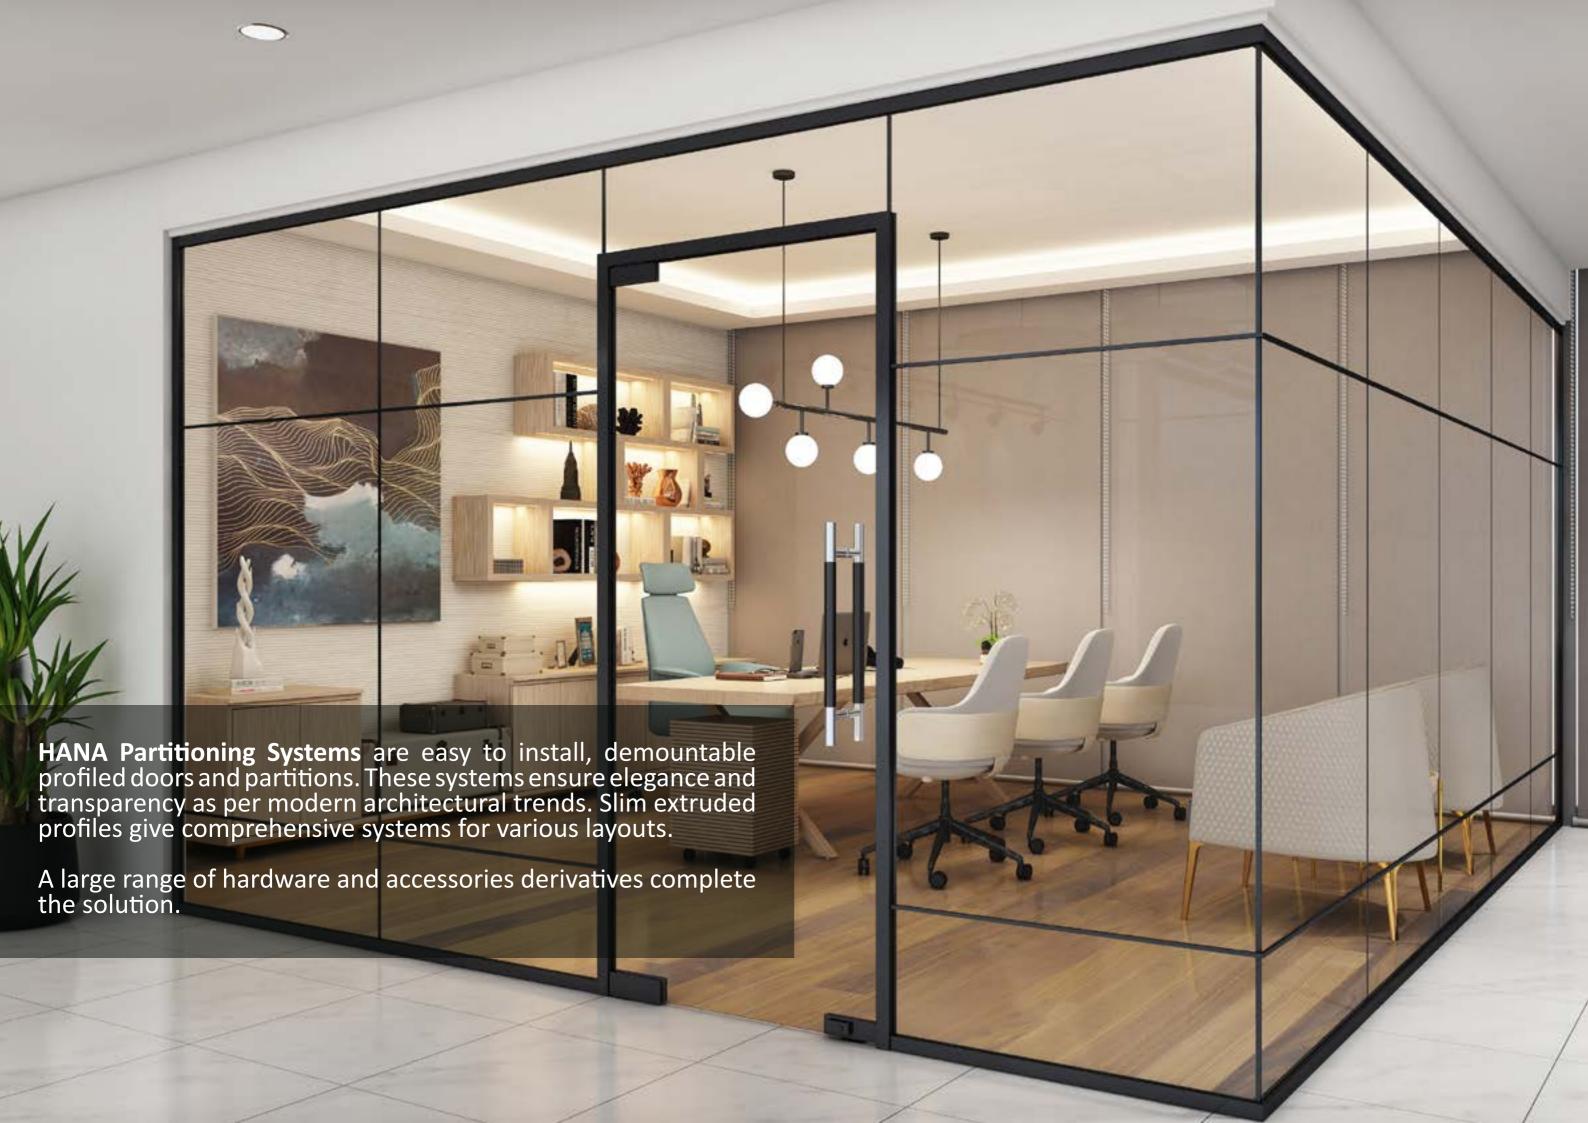


HANA EAZY-11

SINGLE SWING DOOR





TYPICAL LAYOUT

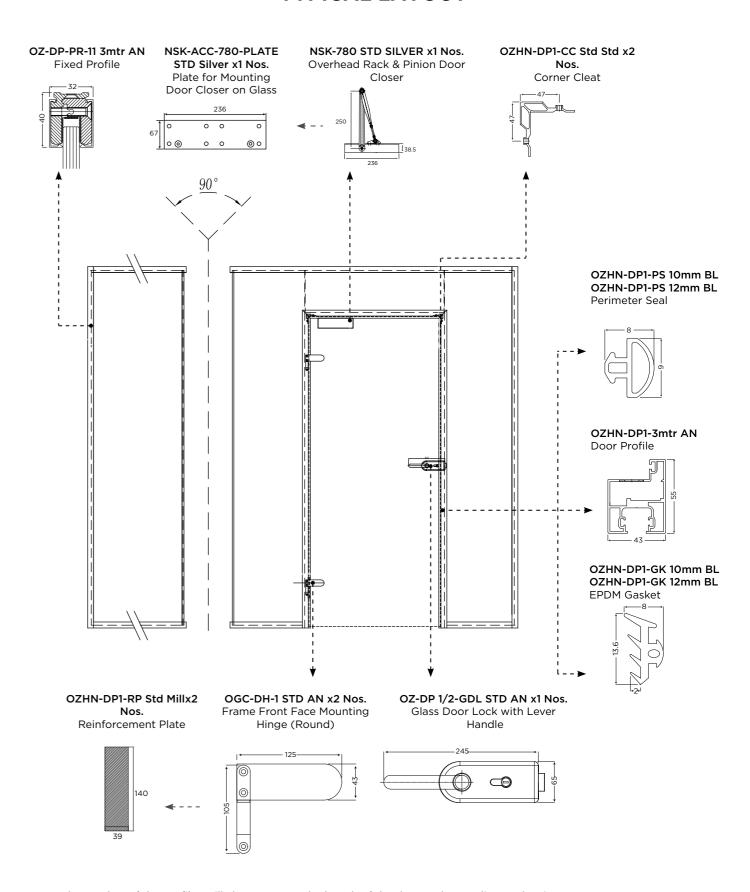



Note: The number of the profiles will change as per the length of the door and according to the site measurement.

DOUBLE SWING DOOR




TYPICAL LAYOUT

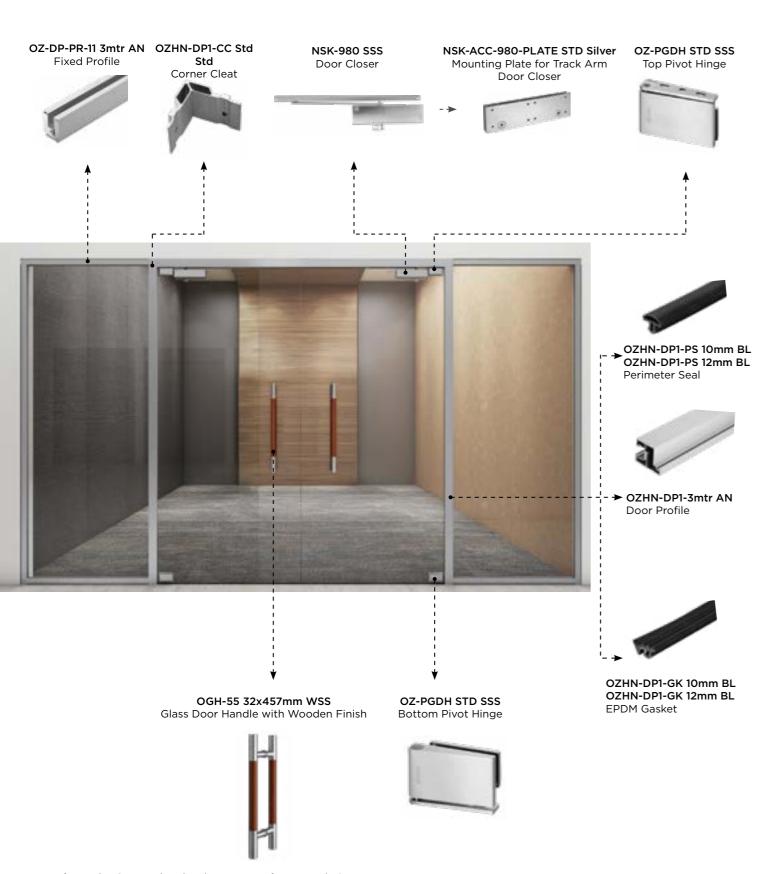

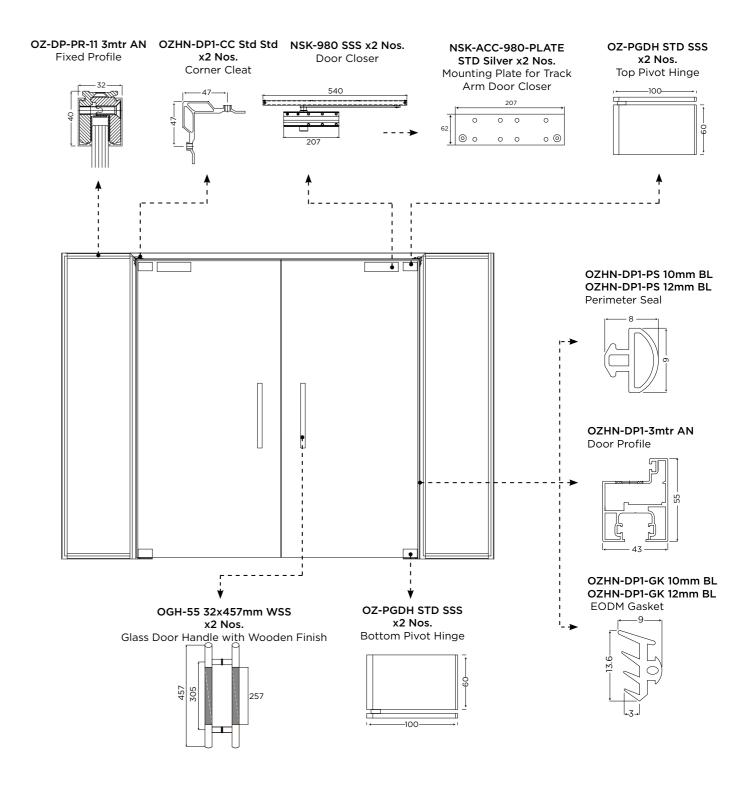

Note: The number of the profiles will change as per the length of the door and according to the site measurement.

TYPICAL LAYOUT

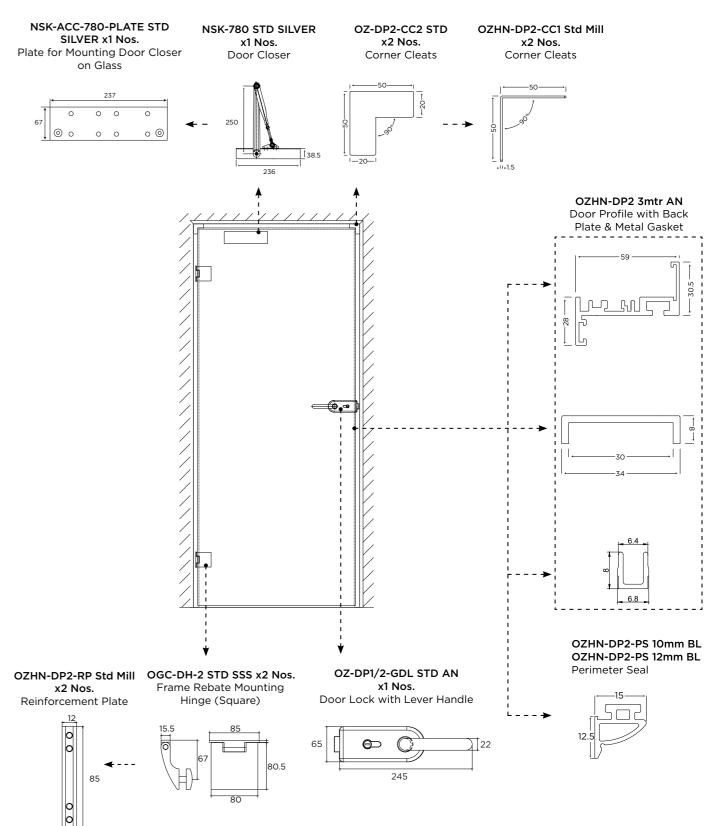


Note: The number of the profiles will change as per the length of the door and according to the site measurement.



Refer to the Ozone glass hardware range for more choices



TYPICAL LAYOUT

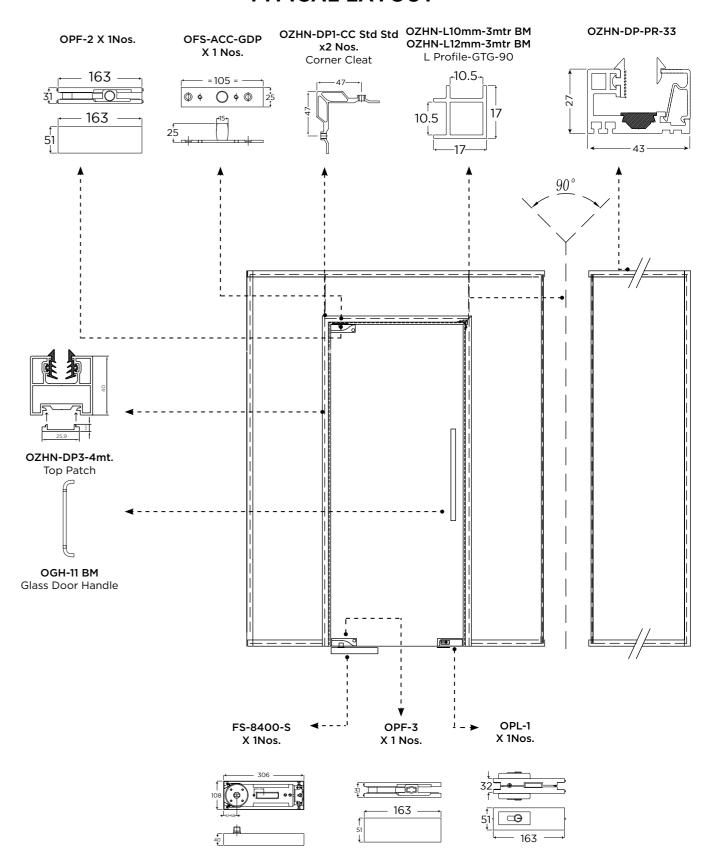

Note: The number of the profiles will change as per the length of the door and according to the site measurement.




Refer to the Ozone glass hardware range for more choices

SINGLE SWING DOOR




TYPICAL LAYOUT

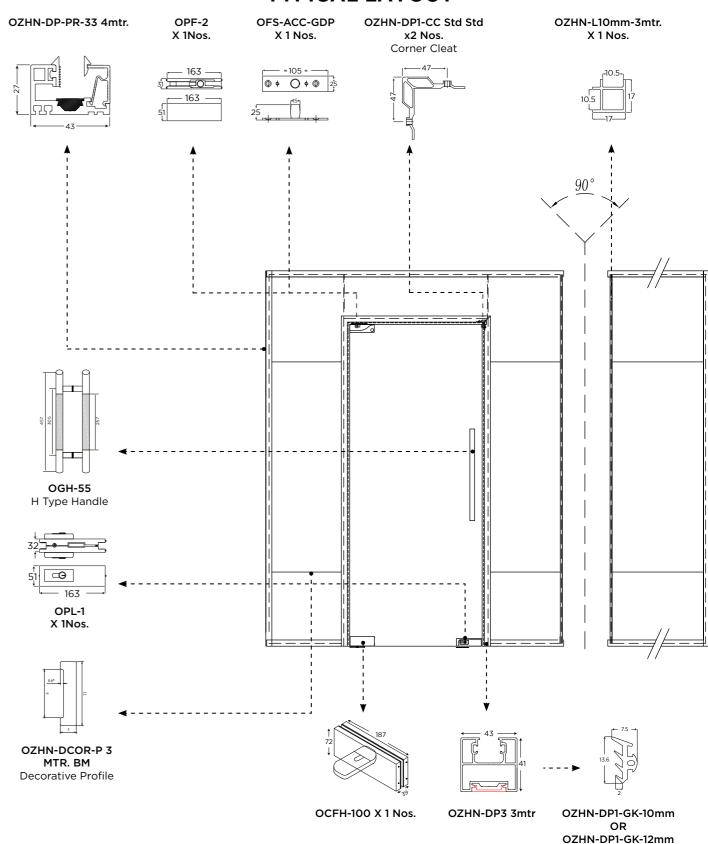


Note: The number of the profiles will change as per the length of the door and according to the site measurement.

Refer to the Ozone glass hardware range for more choices

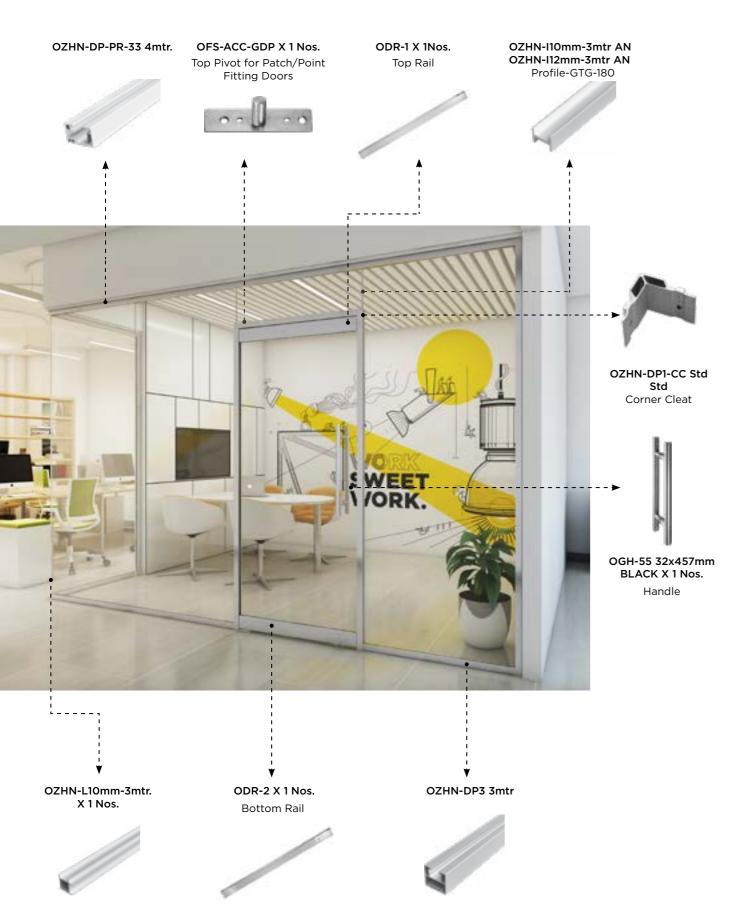

Refer to the Ozone glass hardware range for more choices

TYPICAL LAYOUT

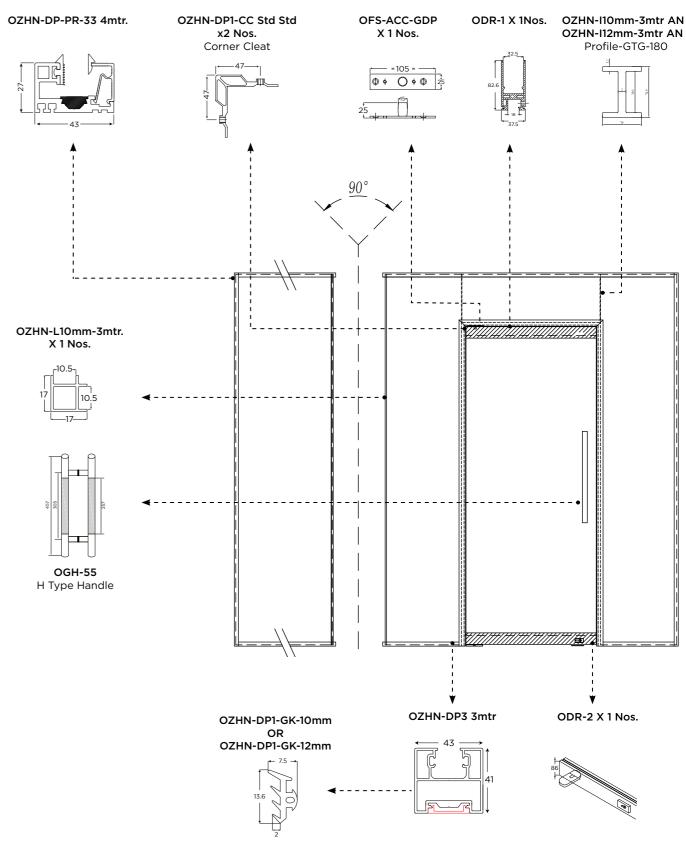

Note: The number of the profiles will change as per the length of the door and according to the site measurement.

GLASS-TO-GLASS PROFILES

BLACK MATT



OZHN-DP1-3mtr ABM Door Profile



OZ-DP-PR-11 3mtr BM Fixed Profile



OZHN-DP1-PS 10mm BL OZHN-DP1-PS 12mm BL Perimeter Seal



OZHN-DP2-PS 10mm BL OZHN-DP2-PS 12mm BL Perimeter Seal



OZHN-DP1-GK 10mm BL **EPDM Gasket**




OZHN-DP1-GK-12mm STD **EPDM Gasket**





OZHN-DP1-RP Std Mill Reinforcement Plate without Hole




OZHN-DP1-CC Std Std Corner Cleat

















GLASS-TO-GLASS PROFILES


ALUMINIUM ANODIZED



OZHN-DP1-3mtr AN Door Profile




OZ-DP-PR-11 3mtr AN Fixed Profile



OZHN-DP1-PS 10mm BL OZHN-DP1-PS 12mm BL Perimeter Seal




OZHN-DP2-PS 10mm BL OZHN-DP2-PS 12mm BL Perimeter Seal





OZHN-DP1-GK 10mm BL **EPDM** Gasket




OZHN-DP1-GK-12mm STD EPDM Gasket


Reinforcement Plate without Hole



OZHN-DP1-RP Std Mill




OZHN-DP1-CC Std Std Corner Cleat



GLASS-TO-WALL PROFILES


BLACK MATT







OZHN-DP2-RP Std Mill Re-inforcement Plate without Hole







OZHN-DP2-CC1 Std Mill Corner Cleat



OZHN-DP2-CC2 Std Mill Corner Cleat






GLASS-TO-WALL PROFILES





ALUMINIUM ANODIZED



OZHN-DP2 3mtr ANDoor Profile with Back Plate & Metal Gasket











OZHN-DP2-RP Std Mill Re-inforcement Plate without Hole






OZHN-DP2-CC1 Std Mill Corner Cleat





OZHN-DP2-CC2 Std Mill Corner Cleat



GLASS-TO-WALL PROFILES

BLACK MATT

GLASS-TO-WALL PROFILES



ALUMINIUM ANODIZED

Product Name	Line Drawing
Fixed Profile OZHN-DP-PR-33 4mtr ABM	BED-PACKING BED-PACKING LOCKING-GASKET FIXED-GASKE 10/12mm
Wall/Transom-Door Profile OZHN-DP3 3mtr ABM	25.9
I Profile-GTG-180 OZHN-I10mm-3mtr BM	2 500 651
I Profile-GTG-180 OZHN-I12mm-3mtr BM	2-1 1 2-2 2-2 2-2 2-2 2-3 2-3 2-3 2-3 2-3 2-3
L Profile-GTG-90 OZHN-L10mm-3mtr BM	
L Profile-GTG-90 OZHN-L12mm-3mtr BM	

Product Name	Line Drawing
Fixed Profile OZHN-DP-PR-33 4mtr AN	BED-PACKING BED-PACKING LOCKING-GASKET FIXED-GASKE 10/12mm LOCKING-GASKET 10/12mm
Wall/Transom-Door Profile OZHN-DP3 3mtr AN	Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q
I Profile-GTG-180 OZHN-I10mm-3mtr AN	
I Profile-GTG-180 OZHN-I12mm-3mtr AN	
L Profile-GTG-90 OZHN-L10mm-3mtr AN	
L Profile-GTG-90 OZHN-L12mm-3mtr AN	


HANA EAZY-11/22/33

BLACK MATT



OGC-DH-1 STD BM Frame Front Face Mounting Hinge (Round)

Glass Thickness: 10/12mm Glass Weight: 60Kg (2Nos) Door Width: 900mm Applications: Frameless Door on Frame Material: Aluminium Finish: BM






OZ-PGDH STD BM

Top/Bottom Pivot Hinge Glass Thickness: 10/12mm Glass Weight: 60 Kg(2Nos) Door Width: 1000mm Applications: Frameless Door -Pivot Hinge

Material: SS304 Finish: BM






OGC-DH-2 STD BM Frame Rebate Mounting Hinge (Square)

Glass Thickness: 10/12mm Glass Weight: 60kg (2Nos), 80kg (3Nos)

Door Width: 1000mm Applications: Frameless Door on Frame

Material: SS304 Finish: BM






OZ-DP 1/2- GDL STD BM Glass Door Lock with Lever Handle

Thumb Turn or Key to Key options Max Glass Thickness: 10-12mm Standard Latch Locking Aluminium Alloy With SS Cover Plate Dimensions: 156x65mm


Finish: BM





OZ-DP1/2-SB STD BM


Strike Box for OZ-DP1/2- GDL STD BM Standard Latch Locking Aluminium Alloy With SS Cover Plate Make Glass Open on one Side only Finish: BM





OZ-DP1/2-SP STD

Strike Plate for OZ-DP1/2- GDL STD AN



HANA EAZY-11/22/33

BLACK MATT





OZ-FGL-BL-G2G Black

Fingerprint Digital Glass Door Lock with 4 in 1 Access

Way Access - Fingerprint, RFID Card, User Pin Code & Remote Control (optional) Automatic Locking Function Doorbell Function

Passage (Open) Mode Finish: BM






OGH-55 32x457mm BMSS

Glass Door Handle with Wooden Finish

Glass hole dia 12mm Grub screws kept out of sight Material -SS304

Finish: BM






NSK-780 STD BM

Overhead Rack & Pinion Door Closer with Scissor/Cross Arm

Maximum Door Weight 80 Kg. Maximum Door Width 950mm. 500,000 Cycles Tested EN 2-5

EN 1154,CE Certified, UL Listed Compatible Saddle Plate, NSK-ACC-780-PLATE STD BM

Finish: BM






NSK-ACC-780-PLATE STD BM

Mounting Plate for Scissor/Cross Arm Door Closer

Material: Aluminium

Finish: BM





NSK-980 TA. BM

Overhead Rack & Pinion Door Closer with Track Arm

Maximum Door Weight 80 Kg. Maximum Door Width 950mm. 500,000 Cycles Tested EN 2-4

EN 1154, CE Certified, UL Listed Compatible Saddle Plate, NSK-ACC-980-PLATE STD BM Finish: BM

207



NSK-ACC-980-PLATE STD BM Mounting Plate for Track Arm Door Closer

Cut-out is required on Glass Material: Aluminium

Finish: BM

	r 		207	
62	0	0	0	0
J_	∘ ⊚	0	0	© 0


HANA EAZY-11/22/33

FINISH - AN & SSS




OGC-DH-1 STD AN Frame Front Face Mounting Hinge (Round)

Glass Thickness: 10/12mm Glass Weight: 60Kg (2Nos) Door Width: 900mm Applications: Frameless Door on Frame Material: Aluminium Finish: AN



OZ-PGDH STD SSS Top/Bottom Pivot Hinge


Glass Thickness: 10/12mm Glass Weight: 60 Kg(2Nos) Door Width: 1000mm Applications: Frameless Door -Pivot Hinge Material: SS304 Finish: SSS



OGC-DH-2 STD SSS

Frame Rebate Mounting Hinge (Square)


Glass Thickness: 10/12mm Glass Weight: 60kg (2Nos), 80kg (3Nos) Door Width: 1000mm Applications: Frameless Door on Frame Material: SS304 Finish: SN





OZ-DP 1/2- GDL STD AN Glass Door Lock with Lever Handle


Thumb Turn or Key to Key options Max Glass Thickness: 10-12mm Standard Latch Locking Aluminium Alloy With SS Cover Plate Dimensions: 156x65mm Finish: SSS






OZ-DP1/2-SB STD AN

Strike Box for OZ-DP1/2- GDL STD AN Standard Latch Locking Aluminium Alloy With SS Cover Plate Make Glass Open on one Side only Finish: AN






OZ-DP1/2-SP STD

Strike Plate for OZ-DP1/2- GDL STD AN








OZDL-23 PCF- G2G STD Fingerprint Digital Glass Door Lock with 4 in 1 Access Modes

Way Access - Fingerprint, RFID Card, User Pin Code & Remote Control (optional) **Automatic Locking Function** Doorbell Function Passage (Open) Mode Finish: SSS






OGH-55 32x457mm WSS


Glass Door Handle with Wooden Finish

Glass hole dia 12mm

Grub screws kept out of sight Material: SS304 Grade

Finish: SSS with Wooden Finish






OGHL-55-25x1340 SSS

Glass Door Handle with Locking Function

Back to back installation on glass Dead bolt movement 32mm at bottom Three point fixing with door

Finish: SSS






NSK-780 STD SILVER

Overhead Rack & Pinion Door Closer with Scissor/Cross Arm

Maximum Door Weight: 100kg Maximum Door Width: 950mm 500,000 Cycles Tested EN 2-5

EN 1154,CE Certified, UL Listed Compatible Saddle Plate, NSK-ACC-780-PLATE STD SILVER Finish: Silver






NSK-ACC-780-PLATE STD SILVER Mounting Plate for Scissor/Cross Arm

Door Closer Material: Aluminium

Finish: Silver






NSK-980 TA. SSS

Overhead Rack & Pinion Door Closer with Track Arm

Maximum Door Weight: 80kg Maximum Door Width: 950mm 500,000 Cycles Tested EN 2-4 EN 1154,CE Certified, UL Listed Compatible Saddle Plate, NSK-ACC-980-PLATE STD







Cutout is required on Glass

Material: Aluminium Finish: SSS


HANA EAZY-44/55/66

FINISH - BLACK MATT



OPF-2 X 1Nos. Top Patch


Variable pivot point of 55 or 65mm With SS 304 cover of OCFH-100 Cover secured with small 'L' key Pivot pin of 15mm diameter Adjustable pivot point 55 or 65mm





OPF-3 X 1 Nos. **Bottom Patch**

Variable pivot point of 55 or 65mm Compatible with Ozone Floor Spring Base Material Casting: Aluminium Alloy Quick Release Covers






OFS-ACC-GDP X 1 Nos.

Top Pivot for Patch/Point Fitting Doors Stainless Steel Pivot

Wear Resistant Pivot Pin Pivot Held in Overhead Structure





OGH-11 BM **Glass Door Handle**

With gaskets to prevent glass damage Sleek construction Handle on both sides Can be used on sliding door also





OPL-1 X 1Nos.

Corner Patch Lock with Strike Plate

With a euro profile cylinder and strike plate Dead bolt projection of 15mm (single throw) Three high security computer keys Cover secured with small 'L' key 1.5mm thick SS 316 cover plate Cover plate secured with a snap-fit mechanism





FS-8400-S X 1Nos.


Floor Spring

Maximum door weight : 80Kg Closing speed: 130-10° Final closing speed: 10-0°

Hold Open (standard): 90° hold open

Installation dim.: Length-306mm, Width-108mm, Height-40mm


10 Years Guarantee against manufactuing defect only



HANA EAZY-44/55/66

FINISH - BLACK MATT






OGH-55

H Type Handle

Pull Handle With Back to Back installation on Glass/Wooden/Metals Doors. Gaskets to prevent the contact between glass and metal. Supporting washer with raised bevelling on the outer surface. Material:-Stainless Steel Grade 304.





OCFH-100 X 1 Nos.

The Original SELF-CLOSING Patch Fitting

Finish: Double Finish of PSS/SSS & Single Finish of SSS.

Quick and easy installation Suitable door weight: Max 100kg. Suitable door width: 750~1000mm Suitable door thickness: 8~12mm Ambient temperature: -20°C to +50°C




HANA EAZY-44/55/66

FINISH - AN & SSS



OPF-2 X 1Nos. Top Patch


Variable pivot point of 55 or 65mm With SS 304 cover of OCFH-100 Cover secured with small 'L' key Pivot pin of 15mm diameter Adjustable pivot point 55 or 65mm





OPF-3 X 1 Nos. Bottom Patch


Variable pivot point of 55 or 65mm Compatible with Ozone Floor Spring Base Material Casting: Aluminium Alloy Quick Release Covers





OFS-ACC-GDP X 1 Nos.
Top Pivot for Patch/Point Fitting Doors

Stainless Steel Pivot Wear Resistant Pivot Pin Pivot Held in Overhead Structure





OGH-11 BM Glass Door Handle

With gaskets to prevent glass damage Sleek construction Handle on both sides

Handle on both sides
Can be used on sliding door also





OPL-1 X 1Nos.

Corner Patch Lock with Strike Plate
With a euro profile cylinder and strike plate

Dead bolt projection of 15mm (single throw)
Three high security computer keys
Cover secured with small 'L' key
1.5mm thick SS 316 cover plate
Cover plate secured with a snap-fit mechanism





FS-8400-S X 1Nos.


Floor Spring

Maximum door weight: 80Kg Closing speed: 130-10° Final closing speed: 10-0°

Hold Open (standard): 90° hold open

Installation dim.: Length-306mm, Width-108mm, Height-40mm

10 Years Guarantee against manufactuing defect only



HANA EAZY-44/55/66

FINISH - AN & SSS




OGH-55

H Type Handle

Pull Handle With Back to Back installation on Glass/Wooden/Metals Doors. Gaskets to prevent the contact between glass and metal. Supporting washer with raised bevelling on the outer surface. Material:-Stainless Steel Grade 304.

Finish: Double Finish of PSS/SSS & Single Finish of SSS.






OCFH-100 X 1 Nos.

The Original SELF-CLOSING Patch Fitting

Quick and easy installation Suitable door weight: Max 100kg. Suitable door width: 750-1000mm Suitable door thickness: 8-12mm Ambient temperature: -20°C to +50°C





ODR-1 X 1Nos. Top Rail






ODR-2 X 1Nos. Bottom rail





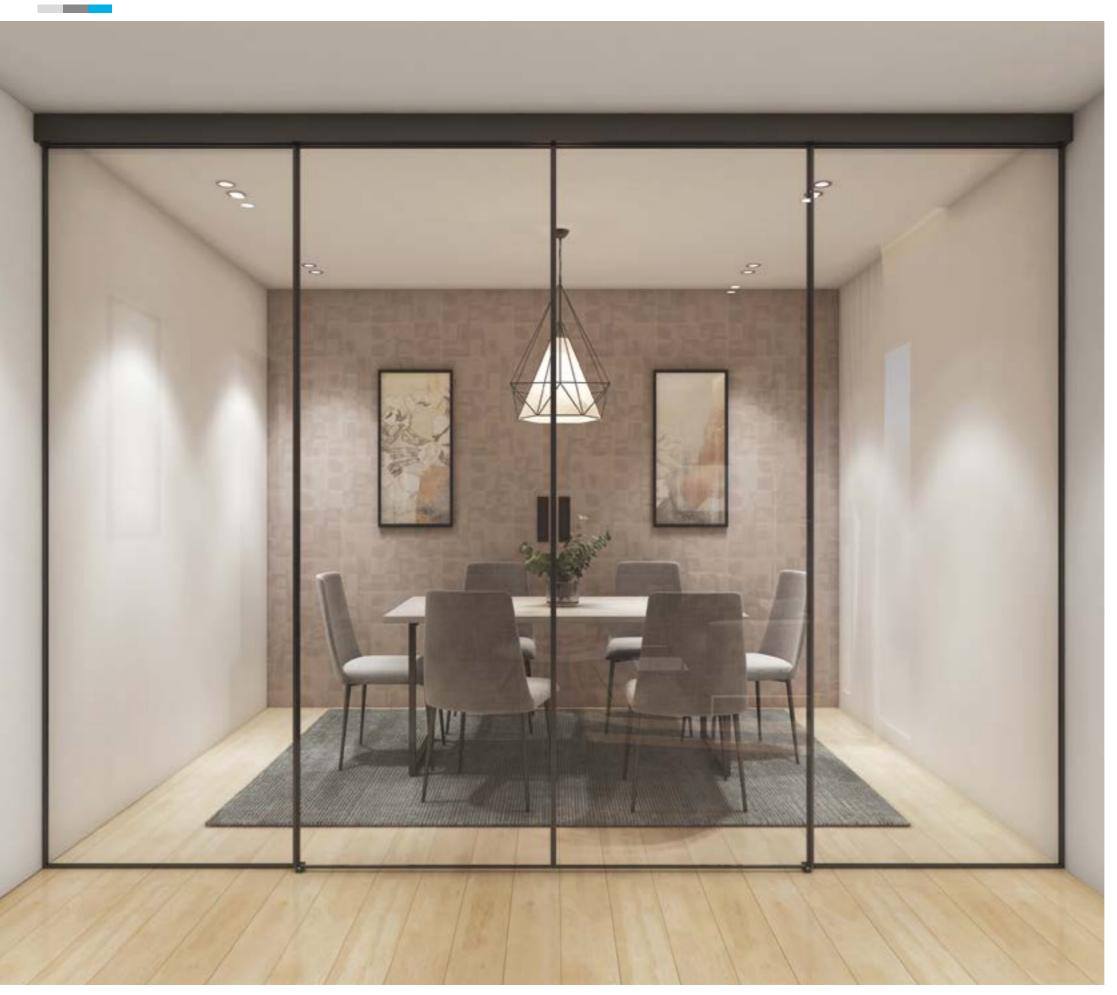

HANA EAZY SL-11 MINIMAL SLIDING DOOR SYSTEM

TECHNICAL DATA

Glass Type Tempered Glass

Glass Thickness 8mm

Max. Door Height 2400mm

Max. Door Weight 80kg

Track Length 4000mm

Application Interior

Material Aluminium

Available in One Panel Sliding Door

Two Panels (Bi-parting) Sliding Door

Finishes





Aluminium Anodized


Black Matt

HANA EAZY SL-11

MINIMAL SLIDING DOOR SYSTEM



TYPICAL LAYOUT

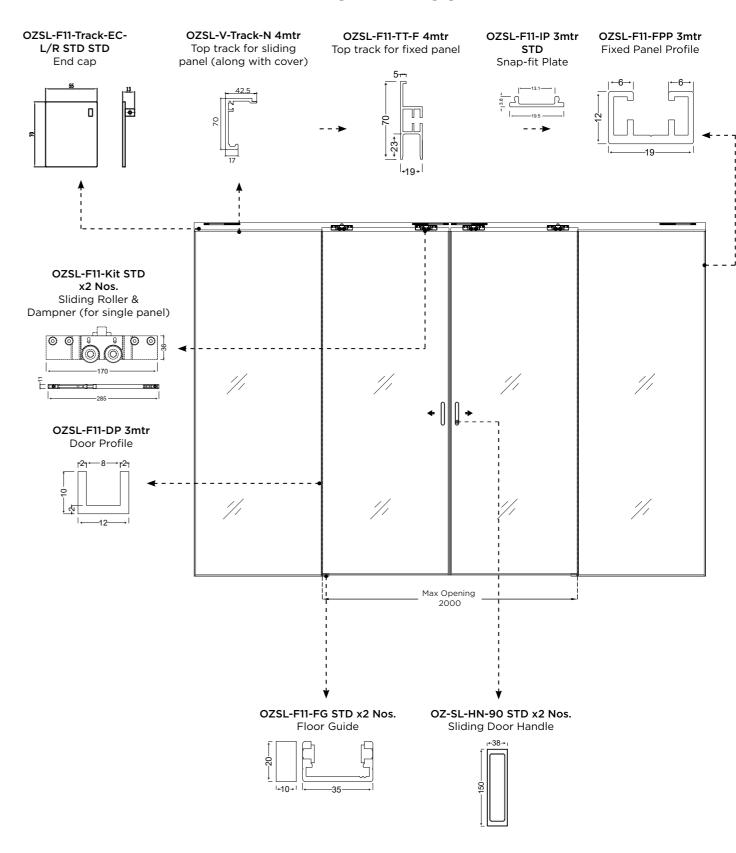

Note: The number of the profiles will change as per the length of the door and according to the site measurement.



MINIMAL SLIDING DOOR SYSTEM - BLACK MATT




EXONEFOR A SAFER WORLD

MINIMAL SLIDING DOOR SYSTEM - AN




OZSL-F11-TT-F 4mtr BM
Top track for fixed panel







OZSL-F11-TT-F 4mtr AN Top Track for Fixed Panel



OZSL-V-Track-N 4mtr BM
Top track for sliding panel (along with cover)



OZSL-V-Track-N 4mtr AN
Top track for sliding panel (along with cover)





OZSL-F11-DP 3mtr BM Door Profile




OZSL-F11-DP 3mtr AN Door Profile






OZSL-F11-FPP 3mtr BM Fixed Panel Profile




OZSL-F11-FPP 3mtr AN Fixed Panel Profile







OZSL-F11-IP 3mtr STD BM Snap-fit Plate






OZSL-F11-IP 3mtr STD AN Snap-fit Plate






OZSL-V-Track-EC-L/R-N STD End cap




OZSL-V-Track-EC-L/R-N STD End cap




MINIMAL SLIDING DOOR SYSTEM - BLACK MATT




OZ-SL-HN-80 STD BM Sliding Door Handle



OZ-SL-HN-90 STD BM Sliding Glass Door Handle Finish: BM




OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)



16

OZSL-V-Clip-N Std Std V Clip









MINIMAL SLIDING DOOR SYSTEM - AN



OZ-SL-HN-80 STD AN Sliding Door Handle




OZ-SL-HN-90 STD AN Sliding Door Handle







OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)





 $\begin{array}{l} \textbf{OZSL-V-Clip-N Std Std} \\ \forall \ \mathsf{Clip} \end{array}$









HANA EAZY SL-22 SELF-CLOSING SLIDING DOOR SYSTEM

TECHNICAL DATA

Glass Type Tempered Glass
Glass Thickness 10mm and 12mm
Max. Door Height 2400mm
Max. Partition Height 3000mm
Max. Door Weight 80kg
Track Length 3000mm


Application Door assembly with Over Panel and Sidelight

Black Matt

Material Aluminium

Finishes





Aluminium Anodized

OZSL-V-Track-EC-L/R-N

Track End Cap

OZSL-V-A3L-N STD

Stopper

OZSL-F11-Kit STD

(for single panel)

OZSL-V-A3R-N STD Sliding Roller & Dampner

OZSL-V-Track-N 3mtr

Top Track for Sliding Panel

(along with cover)

HANA EAZY SL-22

OZSL-V-A6-CVR-EC-N

Cover End Cap

OZSL-V-A6-CVR-N

3mtr BM

Track Cover

OZ-DP-PR-11 3mtr Fixed Profile

OZSL-V-PUL-RN/LN

Pull Back Pulley

OZ-SL-HN-50 STD Sliding Door Handle

OZSL-V-FG-N STD Floor Guide


OZSL-V-A6-N

Glass to Track Fixer

SELF-CLOSING SLIDING DOOR SYSTEM





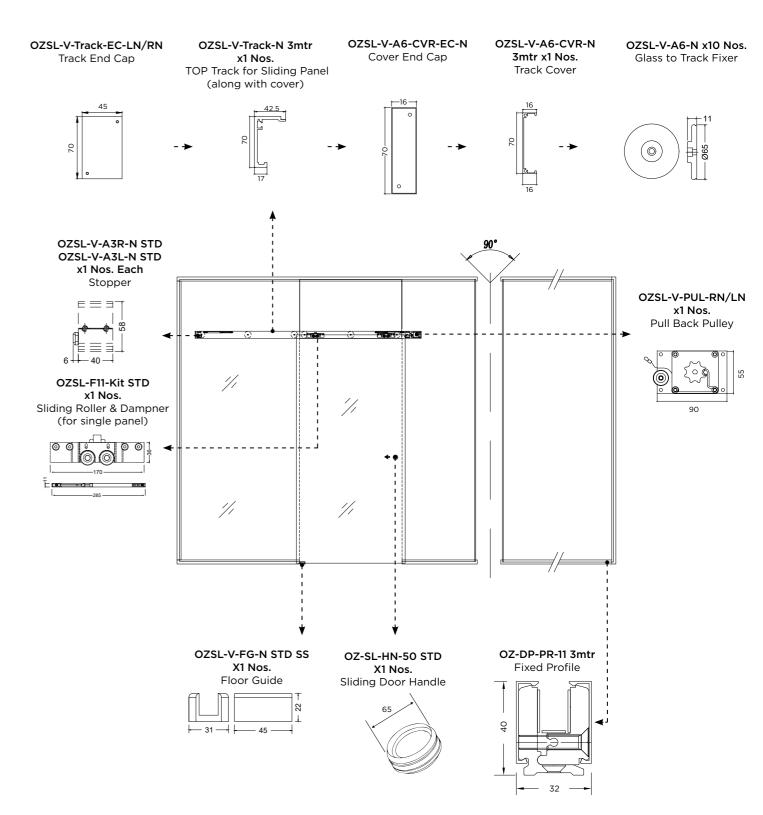

Note: The number of the profiles will change as per the length of the door and according to the site measurement.

SELF-CLOSING SLIDING DOOR SYSTEM


HANA EAZY SL-22

SELF-CLOSING SLIDING DOOR SYSTEM


ZONE FOR A SAFER WORLD



OZSL-V-Track-EC-L/R-N Track End Cap




OZSL-V-Track-EC-L/R-N Track End Cap






OZSL-V-Track-N 3mtr BM
OZSL-V-Track-N 4mtr BM
Top Track for Sliding Panel (along with cover)




OZSL-V-Track-N 3mtr AN
OZSL-V-Track-N 4mtr AN
Top Track for Sliding Panel (along with cover)






OZSL-V-A6-N Glass to Track Fixer




OZSL-V-A6-N Glass to Track Fixer






OZSL-V-A6-CVR-EC-N Cover End Cap




OZSL-V-A6-CVR-EC-N Cover End Cap





OZSL-V-A6-CVR-N 3mtr BM OZSL-V-A6-CVR-N 4mtr BM Track Cover




OZSL-V-A6-CVR-N 3mtr AN OZSL-V-A6-CVR-N 4mtr AN Track Cover


16 02 02



OZ-DP-PR-11 3mtr BM Fixed Profile



OZ-DP-PR-11 3mtr AN Fixed Profile




SELF-CLOSING SLIDING DOOR SYSTEM




ZONE FOR A SAFER WORLD


OZSL-V-PUL-RN/LN Pull Back Pulley




SELF-CLOSING SLIDING DOOR SYSTEM

OZSL-V-PUL-RN/LN Pull Back Pulley






OZSL-V-FG-N STD BM Floor Guide



OZSL-V-FG-N Std SS Floor Guide





OZSL-V-A3R-N STD OZSL-V-A3L-N STD Stopper




OZSL-V-A3R-N STD OZSL-V-A3L-N STD Stopper






OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)




OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)






OZSL-V-FDM-LN Std BM OZSL-V-FDM-RN Std BM Floor Dampner




OZSL-V-FDM-LN Std SS OZSL-V-FDM-RN Std SS Floor Dampner







OZ-SL-HN-50 STD BM Sliding Door Handle



SL-HN-50 STD SSS Sliding Door Handle





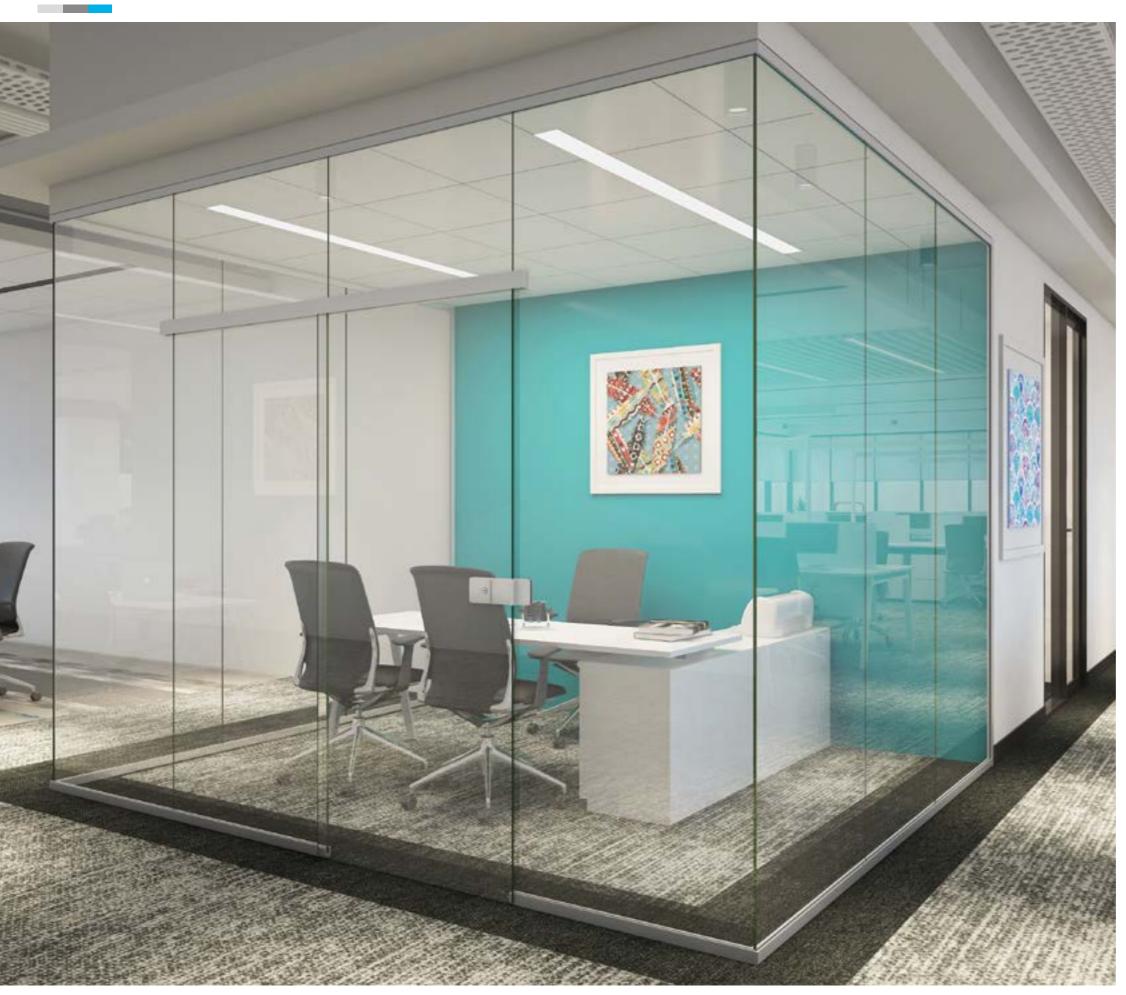

HANA EAZY SL-33 SOFT-CLOSING SLIDING DOOR SYSTEM

TECHNICAL DATA


Glass Type
Tempered Glass
Glass Thickness
10mm and 12mm
Max. Door Height
Max. Partition Height
Max. Door Weight
Track Length
Tempered Glass
10mm and 12mm
3400mm
8400mm
80kg
3000mm

Application Door assembly with Over Panel and Sidelight

Material Aluminium

Finishes






Aluminium Anodized


Black Matt

SOFT-CLOSING SLIDING DOOR SYSTEM



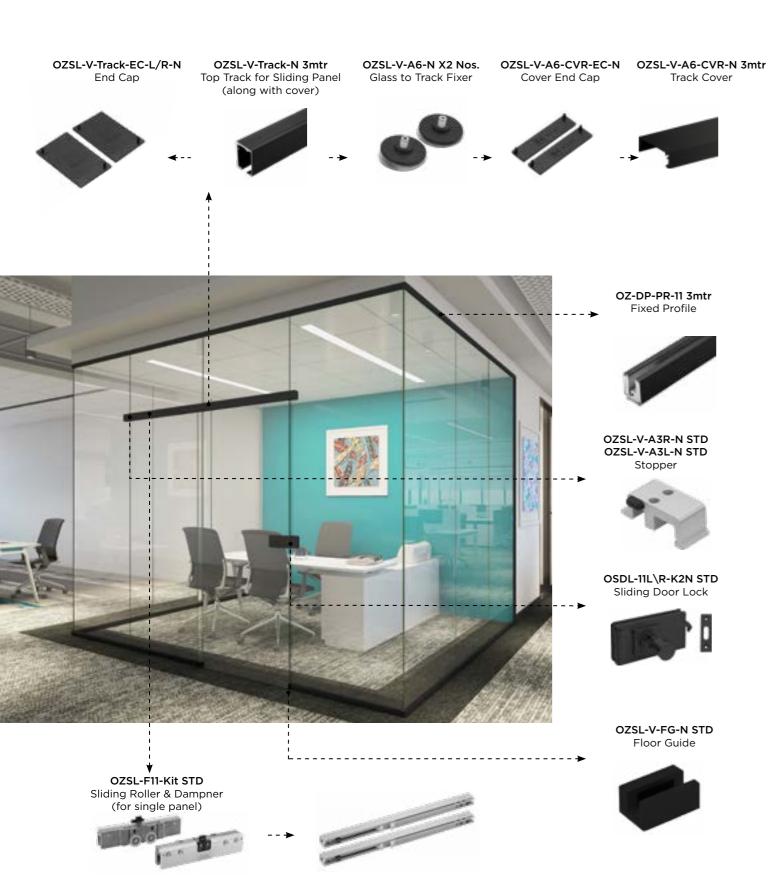

TYPICAL LAYOUT

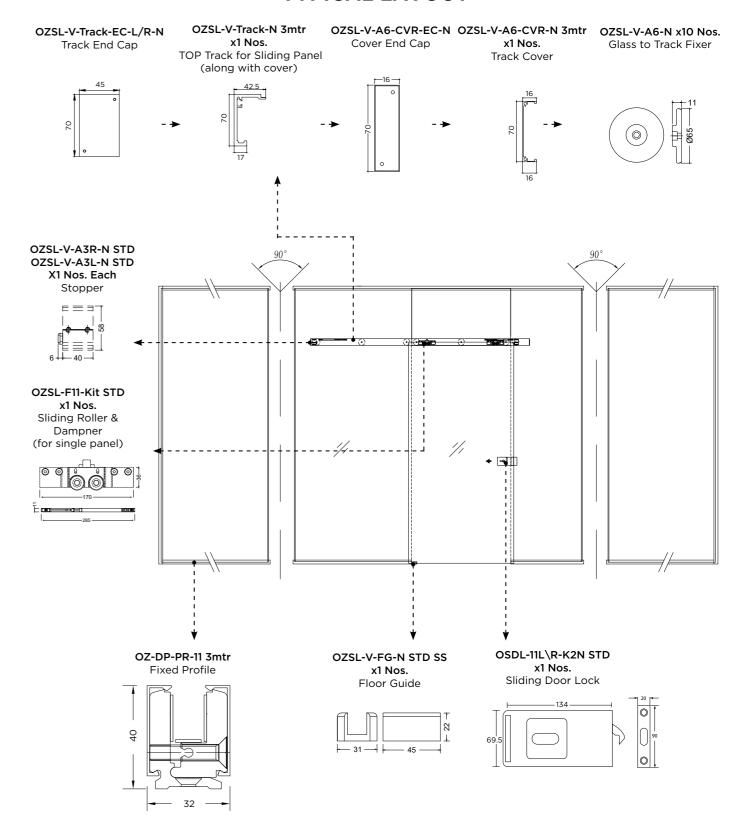


Note: The number of the profiles will change as per the length of the door and according to the site measurement.


SOFT-CLOSING SLIDING DOOR SYSTEM




OZSL-V-Track-EC-L/R-N Track End Cap




OZSL-V-Track-N 3mtr BM
OZSL-V-Track-N 4mtr BM
Top Track for Sliding Panel (along with cover)




OZSL-V-A6-N Glass to Track Fixer




OZSL-V-A6-CVR-EC-N Cover End Cap



OZSL-V-A6-CVR-N 4mtr BM OZSL-V-A6-CVR-N 3mtr BM Track Cover




OSDL-11L\R-K2N STD BM Sliding Door Lock





OSDL-11-SB STD BM Strike Box for Offset Glass/Frame to wall Glass Thickness 8-12mm Vertical Adjustment: ±3.5MM Material: ZAMAK Finish: BM




HANA EAZY SL-33


SOFT-CLOSING SLIDING DOOR SYSTEM




OZSL-V-Track-EC-L/R-N Track End Cap




OZSL-V-Track-N 3mtr AN
OZSL-V-Track-N 4mtr AN
Top Track for Sliding Panel (along with cover)



OZSL-V-A6-N Glass to Track Fixer



OZSL-V-A6-CVR-EC-N Cover End Cap






OZSL-V-A6-CVR-N 4mtr AN OZSL-V-A6-CVR-N 3mtr AN Track Cover






 $\begin{array}{l} \textbf{OSDL-11L} \backslash \textbf{R-K2N STD SSS} \\ \textbf{Sliding Door Lock} \end{array}$





OSDL-11-SB STD SSS Strike Box for Offset Glass/Frame to wall Glass Thickness 8-12mm Vertical Adjustment: ±3.5MM Material: ZAMAK Finish: Brushed Nickel Plated



SOFT-CLOSING SLIDING DOOR SYSTEM


HANA EAZY SL-33

ZONE






OZSL-V-FDM-LN Std BM OZSL-V-FDM-RN Std BM Floor Dampner




OZSL-V-FDM-LN Std SS OZSL-V-FDM-RN Std SS Floor Dampner






OZSL-V-FG-N STD BM Floor Guide



131

OZSL-V-FG-N Std SS Floor Guide





OZSL-V-A3R-N STD OZSL-V-A3L-N STD Stopper




So goe

OZSL-V-A3R-N STD OZSL-V-A3L-N STD Stopper






OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)






OZSL-F11-Kit STD Sliding Roller & Dampner (for single panel)







OZSL-V-A6-CVR-N 3mtr-BM OZSL-V-A6-CVR-N 4mtr-BM Top Track for Sliding Panel






OZSL-V-A6-CVR-N 3mtr-AN OZSL-V-A6-CVR-N 4mtr-AN Top track for sliding panel






OSDL-11ACC-SP Std BM Strike Plate




•

OSDL-11ACC-SP StdSSS Strike Plate



STANDARD SLIDING DOOR SYSTEM



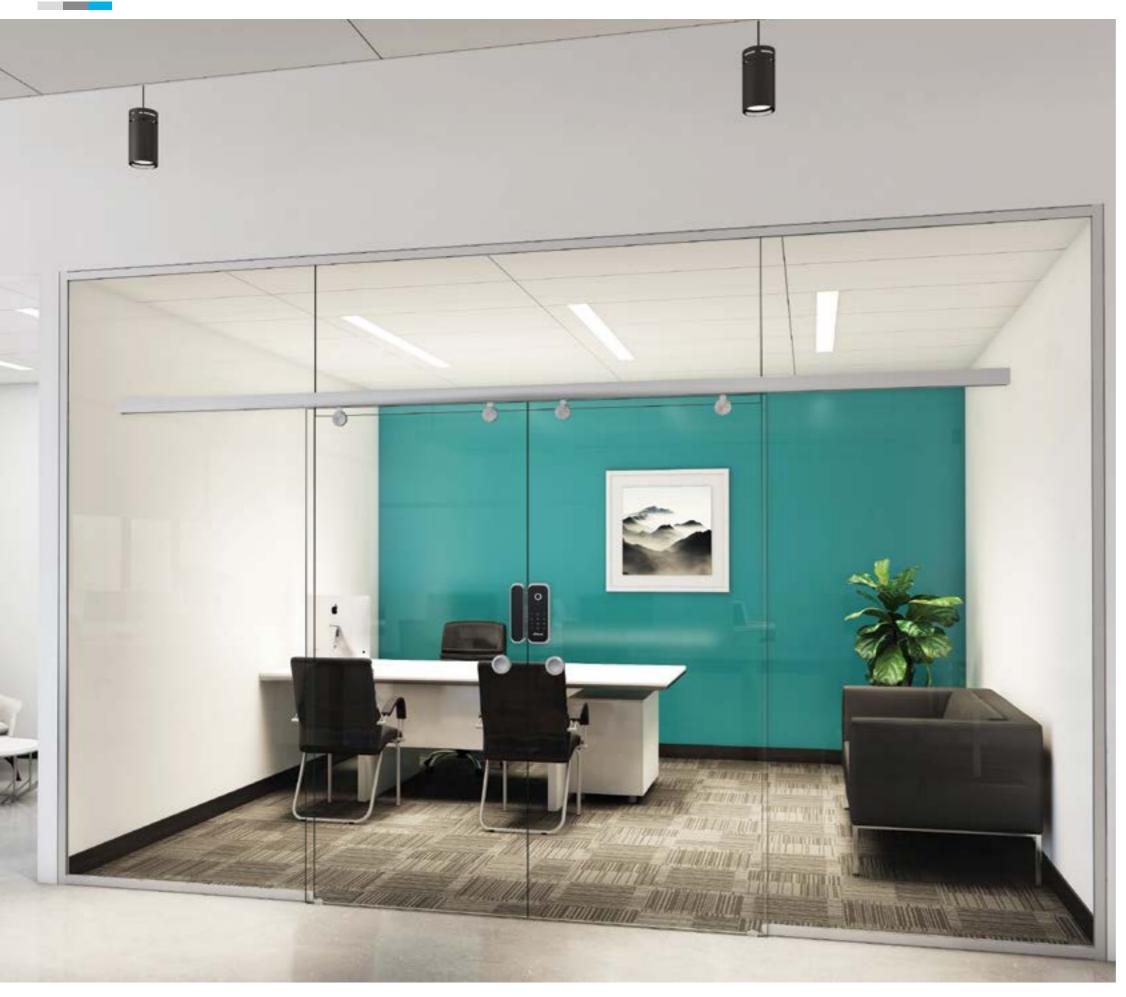

CONCEPT-A

STANDARD SLIDING DOOR SYSTEM

TECHNICAL DATA


Glass Type Tempered Glass
Glass Thickness 10mm and 12mm
Max. Door Height 2400mm
Max. Partition Height 3000mm
Max. Door Weight 40kg - 90kg

Application Door assembly with Over Panel and Sidelight

Material Aluminium

Finishes





Aluminium Anodized

nodized Black Matt

Available Range:

SL-44-A1

SL-44-A2







OSL-ED-44-A1

OSL-ED-44-A2







STANDARD SLIDING DOOR SYSTEM



TYPICAL LAYOUT

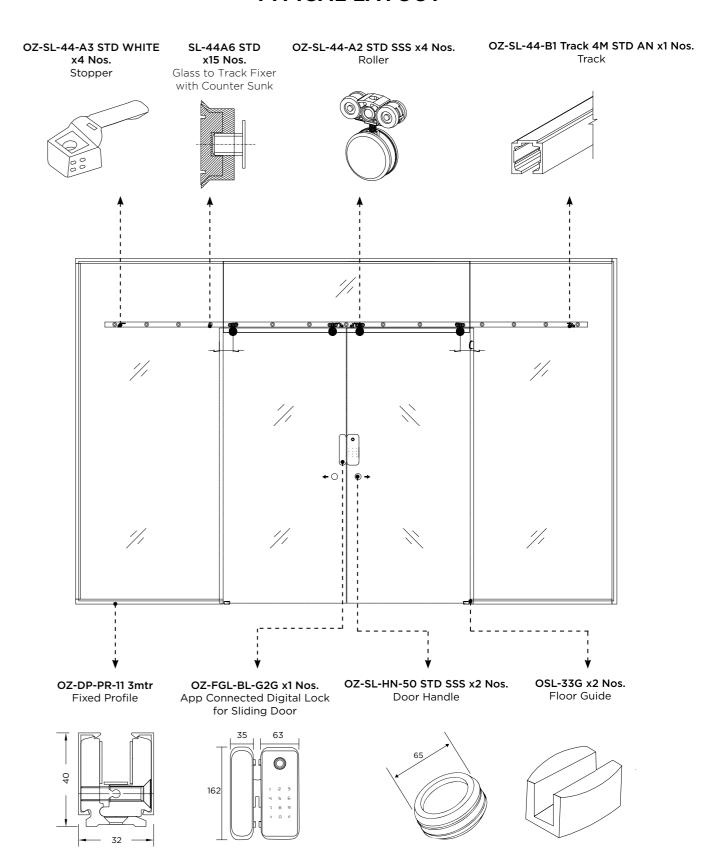

Note: The number of the profiles will change as per the length of the door and according to the site measurement.

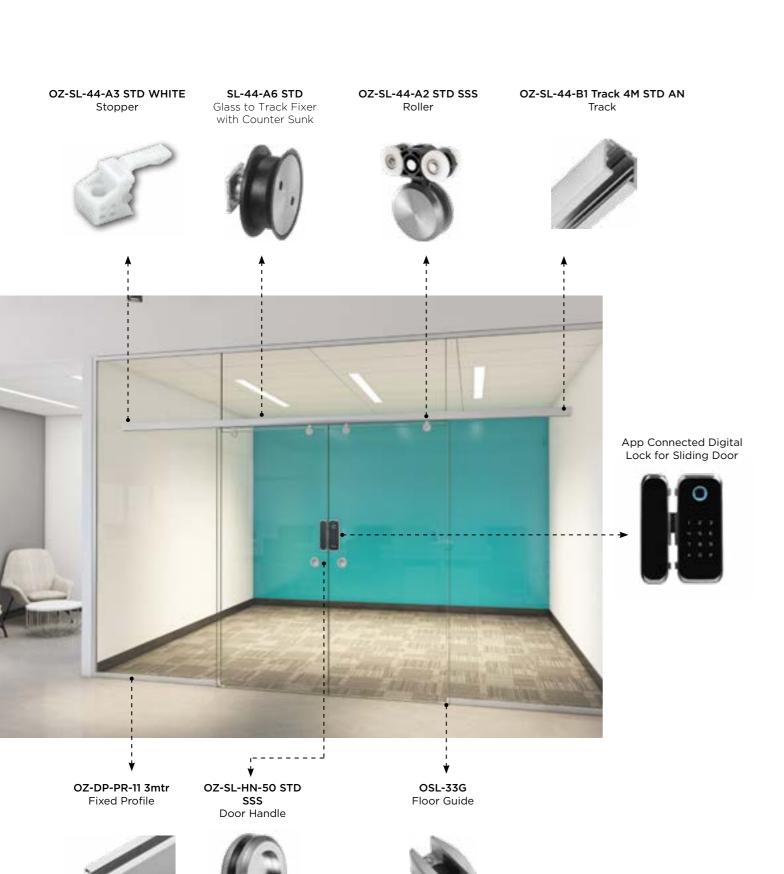

Refer to the Ozone glass hardware range for more choices

STANDARD SLIDING DOOR SYSTEM




STANDARD SLIDING DOOR SYSTEM







000

OZ-SL-44-A2 KIT STD BM
Kit Includes: 02 pcs Roller, 02 pcs Stopper and 01 pc Floor Guide













OZ-SL-44-A6 STD SSSGlass to Track Fixer with Counter Sunk




OZ-SL-44-A6 STD SSSGlass to Track Fixer with Counter Sunk






OZ-DP-PR-11 3mtr BM Fixed Profile




OZ-DP-PR-11 3mtr AN Fixed Profile







OZ-SL-44-B1 Track 4M STD BM Track



OZ-SL-44-B1 Track 4M STD AN Track





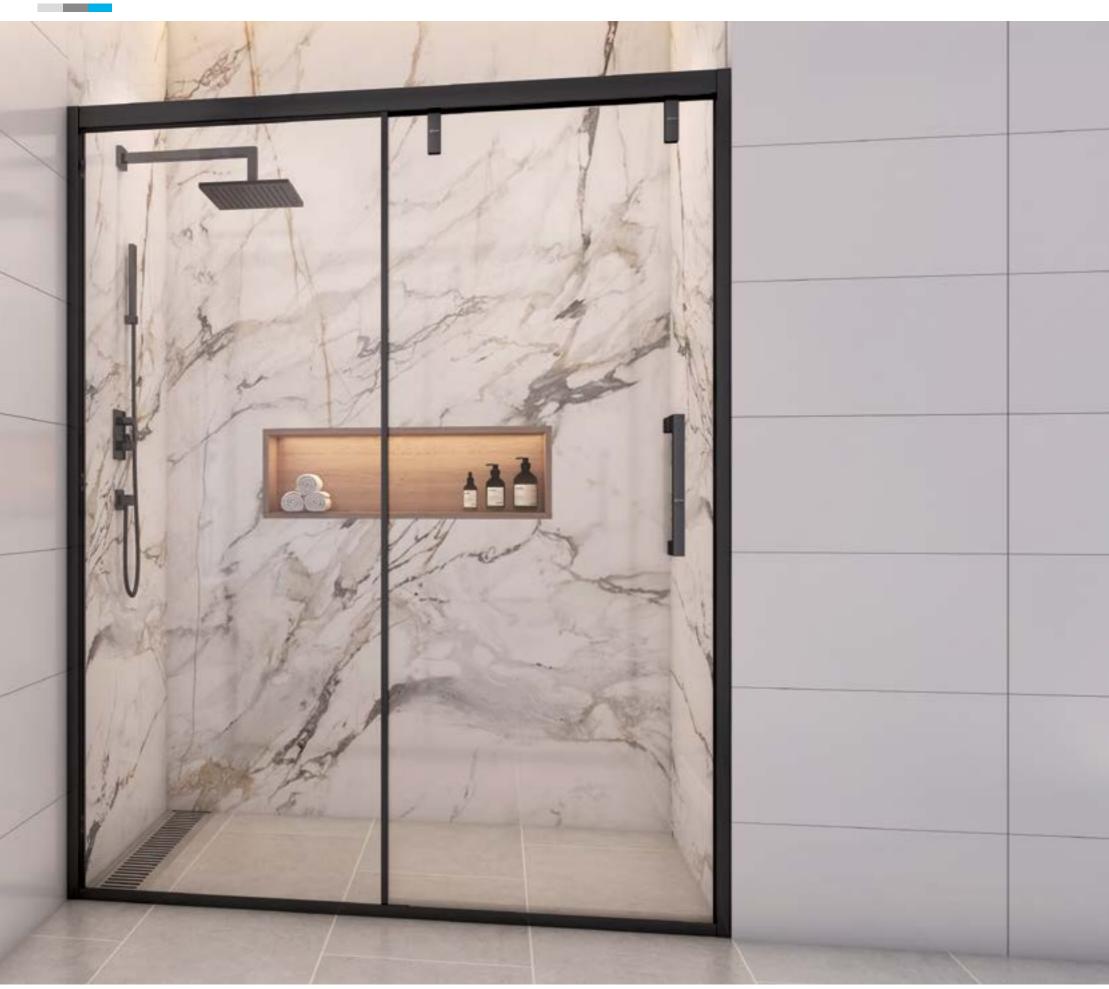

HANA EAZY SHOWER-11

FRAMED SLIDING SHOWER ENCLOSURE

OZSL-F22-180° R 3X2mtr CP/BM

TECHNICAL DATA


Glass Type
Glass Thickness
Max. Door Height
Max. Door Weight
Track Length
Application
Material

Tempered Glass
8mm
2000mm
45kg
3000mm
Shower Enclosure
Aluminium

Finishes

Standard Finishes





Chrome Polished

Black Matt


CP & BM

HANA EAZY SHOWER-11

FRAMED SHOWER ENCLOSURE



TYPICAL LAYOUT

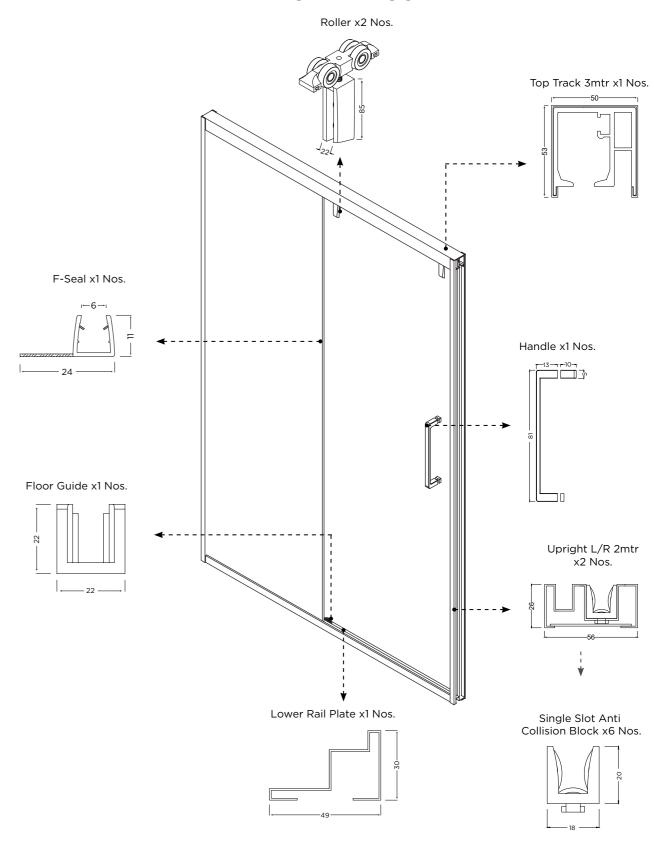

Note: The number of the profiles will change as per the length of the door and according to the site measurement.





Complete Kit Code: OZSL-F22-180° R 3x2mtr BM


Product Name	Product Image	Kit Inculde
Top Track 3mtr		01 Pc.
F-Seal		01 Pc.
Upright L/R Profile 2mtr		O2 Pcs.
Lower Rail Plate		01 Pc.
Roller	4 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	02 Pcs.
Handle		01 Pc.
Floor Guide		01 Pc.
Single Slot Anti-Collision Block		06 Pcs.

Complete Kit Code: OZSL-F22-180° R 3x2mtr CP

Product Name	Product Image	Kit Inculde
Top Track 3mtr		01 Pc.
F-Seal		01 Pc.
Upright L/R Profile 2mtr		O2 Pcs.
Lower Rail Plate		01 Pc.
Roller	200	O2 Pcs.
Handle	A S	01 Pc.
Floor Guide		01 Pc.
Single Slot Anti-Collision Block		06 Pcs.

FRAMED SHOWER ENCLOSURES



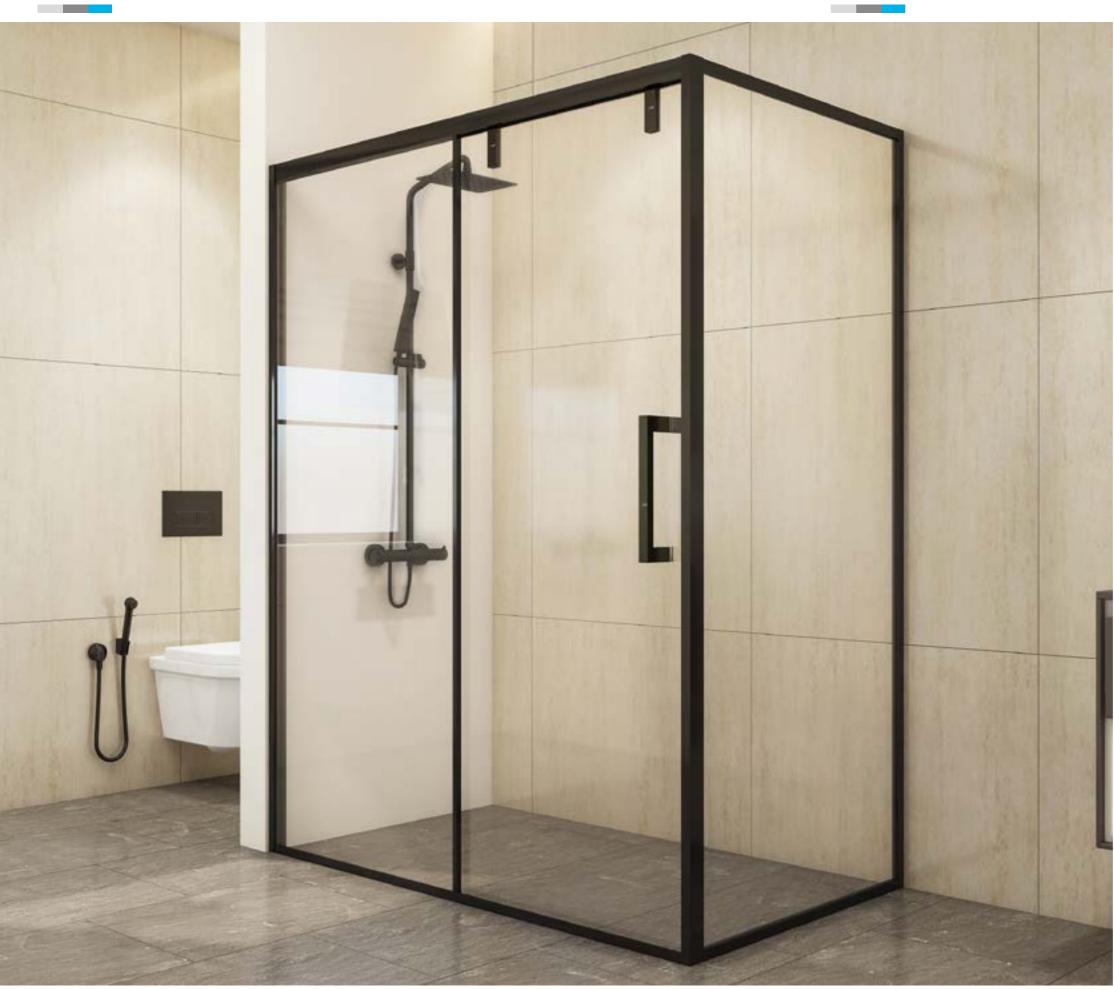

HANA EAZY SHOWER-22

FRAMED SLIDING SHOWER ENCLOSURE

OZSL-F22-90° R 2X2X2.5mtr CP/BM

TECHNICAL DATA

Glass Type Tempered Glass **Glass Thickness** 8mm Max. Door Height 2000mm Max. Door Weight 45kg Track Length 3000mm Application Shower Enclosure Material Aluminium Standard Finishes CP & BM

Finishes





Chrome Polished


Black Matt

HANA EAZY SHOWER-22

FRAMED SHOWER ENCLOSURE



TYPICAL LAYOUT

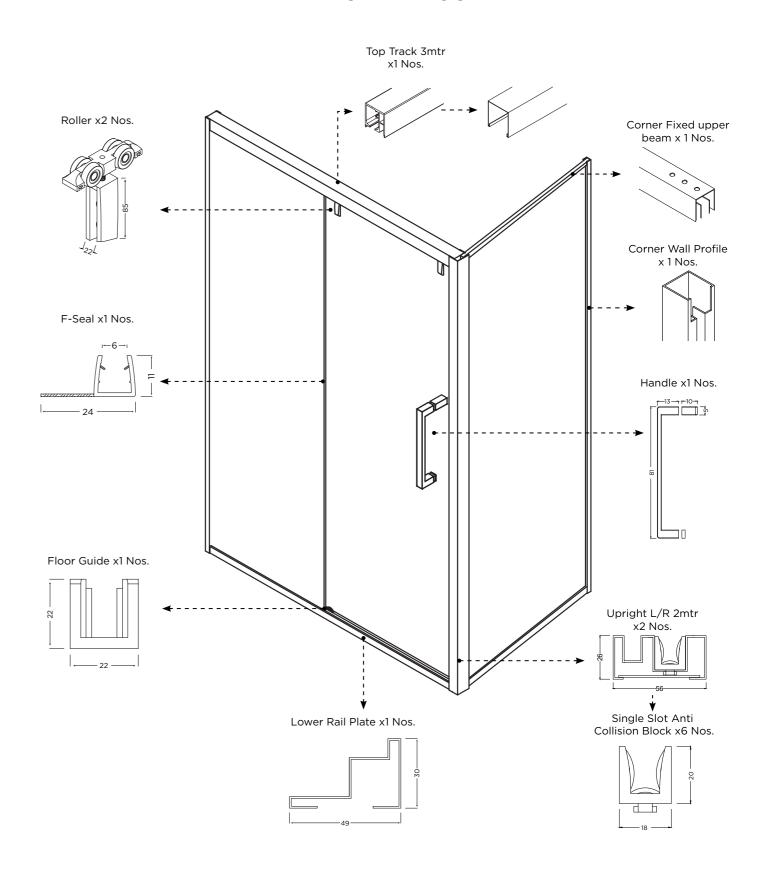

Note: The number of the profiles will change as per the length of the door and according to the site measurement.



HANA EAZY SHOWER-22

FRAMED SHOWER ENCLOSURE

Complete Kit Code: OZSL-F22-90° R 2X2x2.5mtr BM

Product Name	Product Image	Kit Inculde
Top Track 3mtr		01 Pc.
F-Seal		01 Pc.
Upright L/R Profile 2mtr		02 Pcs.
Lower Rail Plate		01 Pc.
Roller	60 Gy	02 Pcs.
Handle		01 Pc.
Floor Guide		01 Pc.
Single Slot Anti-Collision Block		06 Pcs.

HANA EAZY SHOWER-22

ZONE FOR A SAFER WORLD

FRAMED SHOWER ENCLOSURE

Complete Kit Code: OZSL-F22-90° R 2X2x2.5mtr CP

Product Name	Product Image	Kit Inculde
Top Track 3mtr		01 Pc.
F-Seal		01 Pc.
Upright L/R Profile 2mtr		02 Pcs.
Lower Rail Plate		01 Pc.
Roller	4	02 Pcs.
Handle	E	01 Pc.
Floor Guide		01 Pc.
Single Slot Anti-Collision Block	No.	06 Pcs.










For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.
		For 12 MM Glass Thicknes	S	
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.

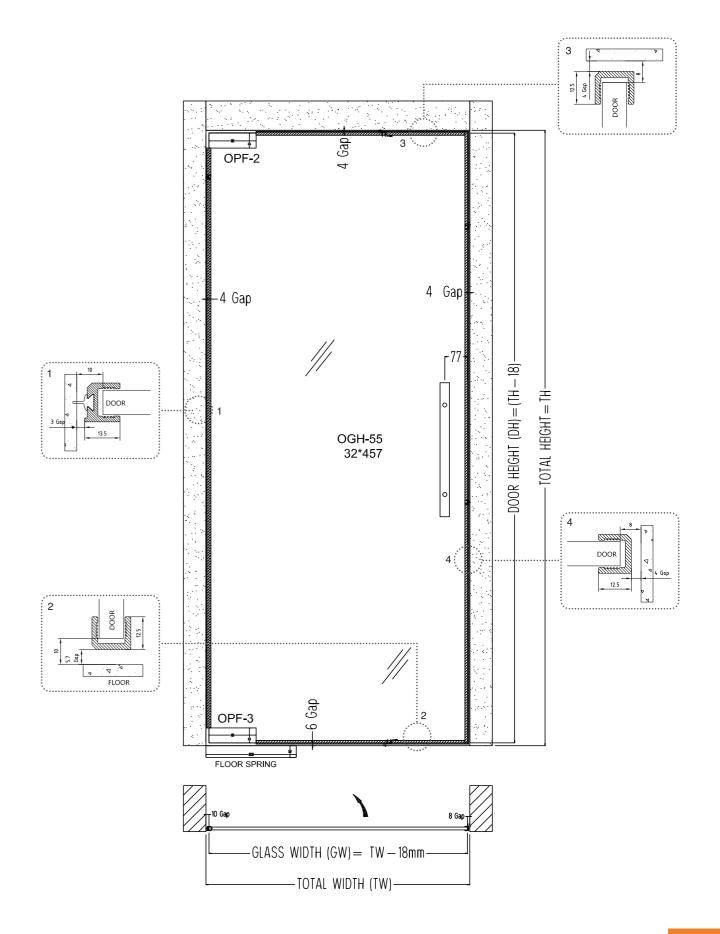









For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.
		For 12 MM Glass Thickness	SS	
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.

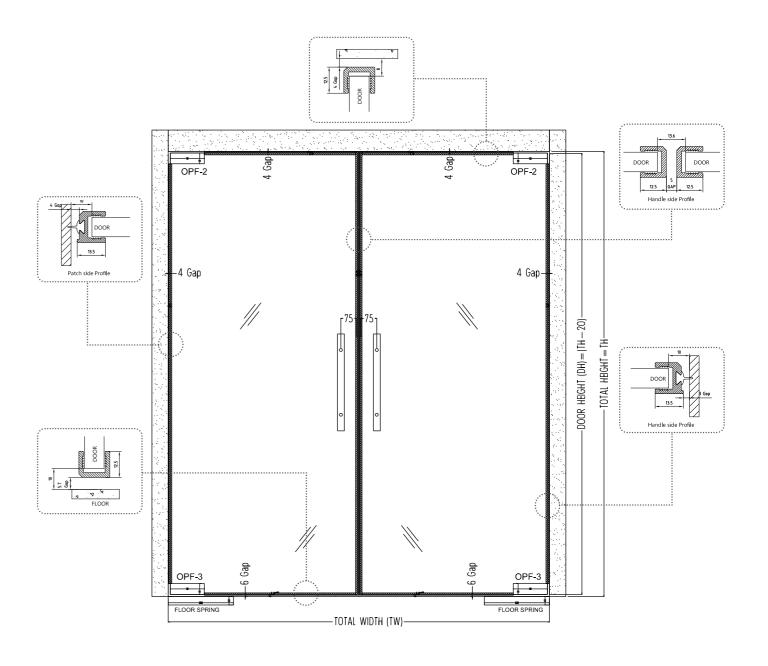

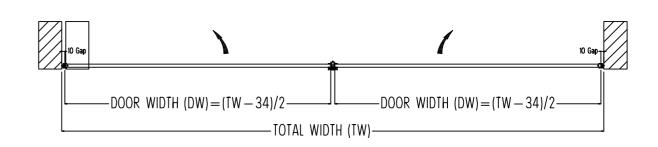









For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.
		For 12 MM Glass Thicknes	SS	
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.

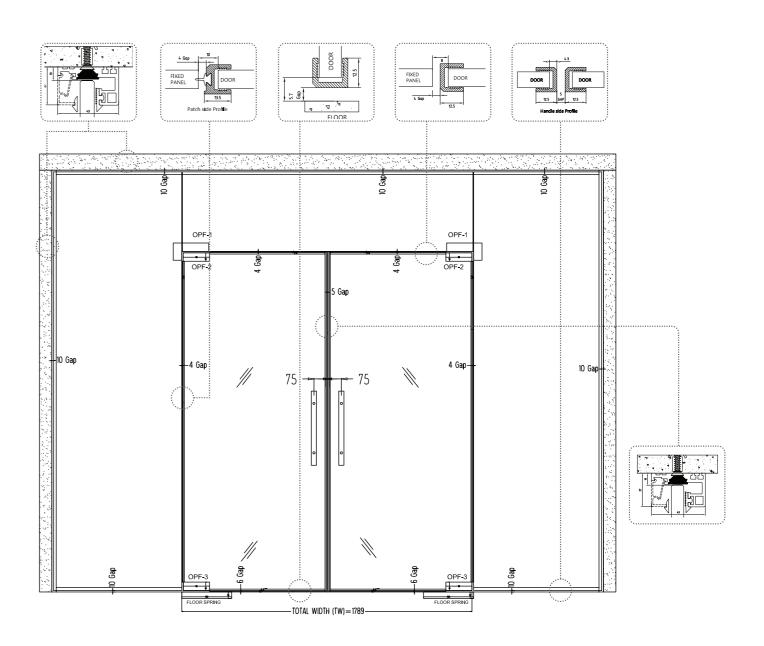



OUTLINER SLICK SW-11/22/33









OPF-2 X 1Nos.
Top Patch
Variable pivot point of 55 or 65mm
With SS 304 cover of OCFH-100
Cover secured with small 'L' key
Pivot pin of 15mm diameter

Adjustable pivot point 55 or 65mm






OPF-3 X 1 Nos.
Bottom Patch
Variable pivot point of 55 or 65mm
Compatible with Ozone Floor Spring
Base Material Casting: Aluminium Alloy
Quick Release Covers





OFS-ACC-GDP X 1 Nos.
Top Pivot for Patch/Point Fitting Doors
Stainless Steel Pivot
Wear Resistant Pivot Pin
Pivot Held in Overhead Structure






OGH-11 BM
Glass Door Handle
With gaskets to prevent glass damage
Sleek construction
Handle on both sides
Can be used on sliding door also





OPL-1 X 1Nos.
Corner Patch Lock with Strike Plate
With a euro profile cylinder and strike plate
Dead bolt projection of 15mm (single throw)
Three high security computer keys
Cover secured with small 'L' key
1.5mm thick SS 316 cover plate
Cover plate secured with a snap-fit mechanism

FS-8400-S X 1Nos.





Floor Spring
Maximum door weight: 80Kg
Closing speed: 130-10°
Final closing speed: 10-0°
Hold Open (standard): 90° hold open
Installation dim.: Length-306mm, Width-108mm, Height-40mm
10 Years Guarantee against manufactuing defect only






OGH-55-BM

H Type Handle

Pull Handle With Back to Back installation on Glass/Wooden/Metals Doors. Gaskets to prevent the contact between glass and metal. Supporting washer with raised bevelling on the outer surface. Material:-Stainless Steel Grade 304. Finish: Double Finish of PSS/SSS & Single Finish of SSS.





OCFH-100 X 1 Nos. The Original SELF-CLOSING Patch Fitting


Quick and easy installation
Suitable door weight: Max 100kg.
Suitable door width: 750-1000mm
Suitable door thickness: 8-12mm
Ambient temperature: -20°C to +50°C





OPF-1 STD BM
Over Panel Side Panel Connecting
Patch with Pivot
Quick and easy installation

Quick and easy installation Ambient temperature: -20°C to +50°C




183 www.ozone-india.com customercare@ozone-india.com 184







	For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.	
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.	
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.	
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.	
04	OZSW-F22-TB1 3mtr	Bottom Profile A Threshold/Wall	3Mtr	1 Nos.	
05	OZSW-F22-MP 3mtr	Magnetic Profile with Strip	3Mtr	1 Nos.	

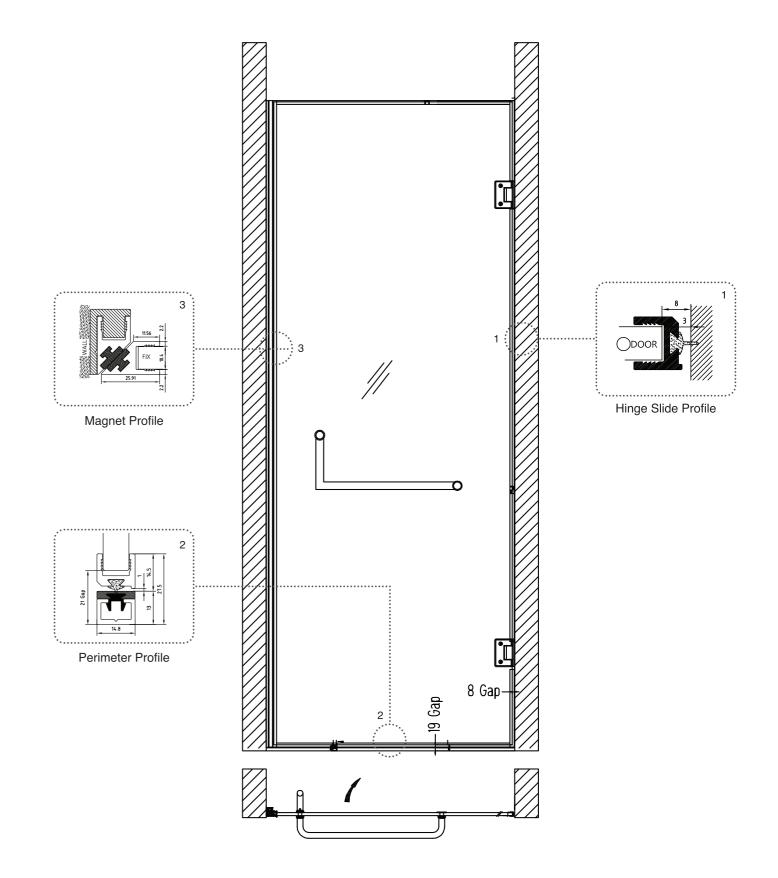




GLASS-TO-GLASS 90° SHOWER ENCLOSURE





For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.
04	OZSW-F22-TB1 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.
05	OZSW-F22-TB2 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.
06	OZSW-F22-MP 3mtr	Magnetic Profile with Strip	3Mtr	1 Nos.
07	OZSW-F22-25T-ED 2/3mtr	Reinforcement track	2/3Mtr	1 Nos.
08	OZSW-F22-CST 2/3mtr	Cover Strip Almunium with Plastic Strip	2/3Mtr	1 Nos.
09		Reinforcement Holder	N/A	1 Nos.

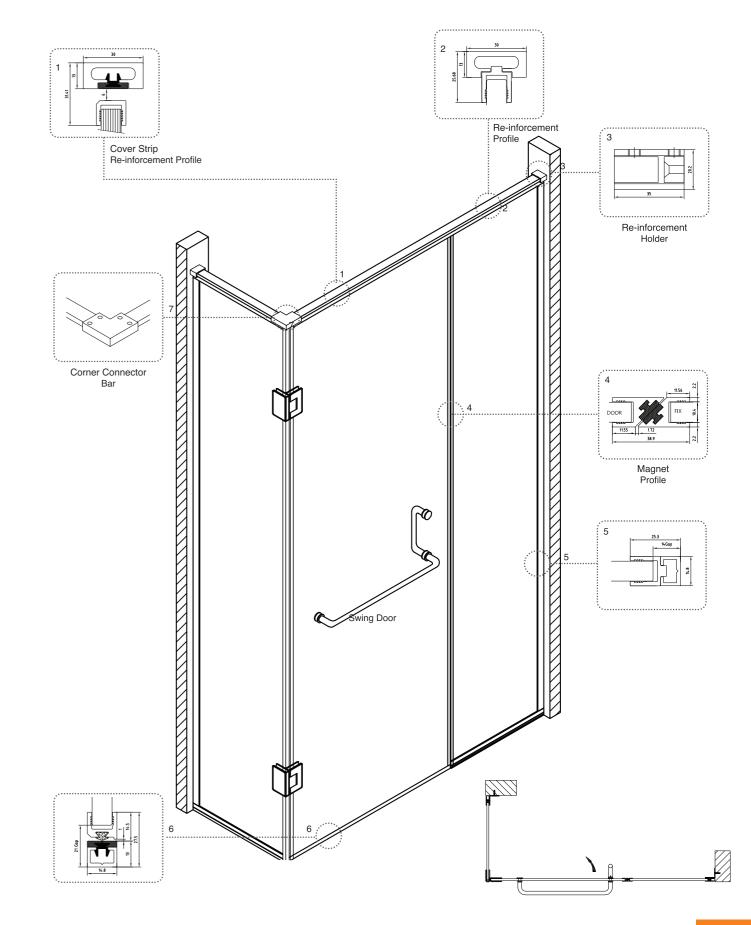




GLASS-TO-GLASS 90° SHOWER ENCLOSURE





	For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.	
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.	
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.	
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.	
04	OZSW-F22-TB1 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
05	OZSW-F22-TB2 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
06	OZSW-F22-MP 3mtr	Magnetic Profile with Strip	3Mtr	1 Nos.	
07	OZSW-F22-25T-ED 2/3mtr	Reinforcement track	2/3Mtr	1 Nos.	
08	OZSW-F22-CST 2/3mtr	Cover Strip Almunium with Plastic Strip	2/3Mtr	1 Nos.	
09		Reinforcement Holder	N/A	1 Nos.	

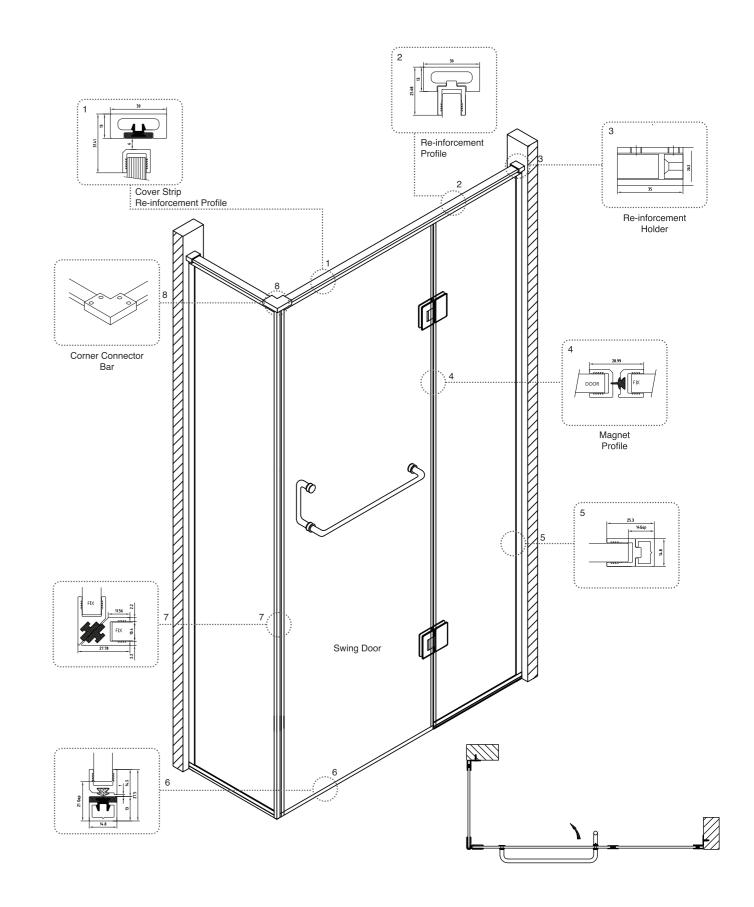




GLASS-TO-GLASS 180° SHOWER ENCLOSURE





	For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.	
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.	
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.	
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.	
04	OZSW-F22-TB1 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
05	OZSW-F22-TB2 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
06	OZSW-F22-MP 3mtr	Magnetic Profile with Strip	3Mtr	1 Nos.	
07	OZSW-F22-25T-ED 2/3mtr	Reinforcement track	2/3Mtr	1 Nos.	
08	OZSW-F22-CST 2/3mtr	Cover Strip Almunium with Plastic Strip	2/3Mtr	1 Nos.	
09		Reinforcement Holder	N/A	1 Nos.	

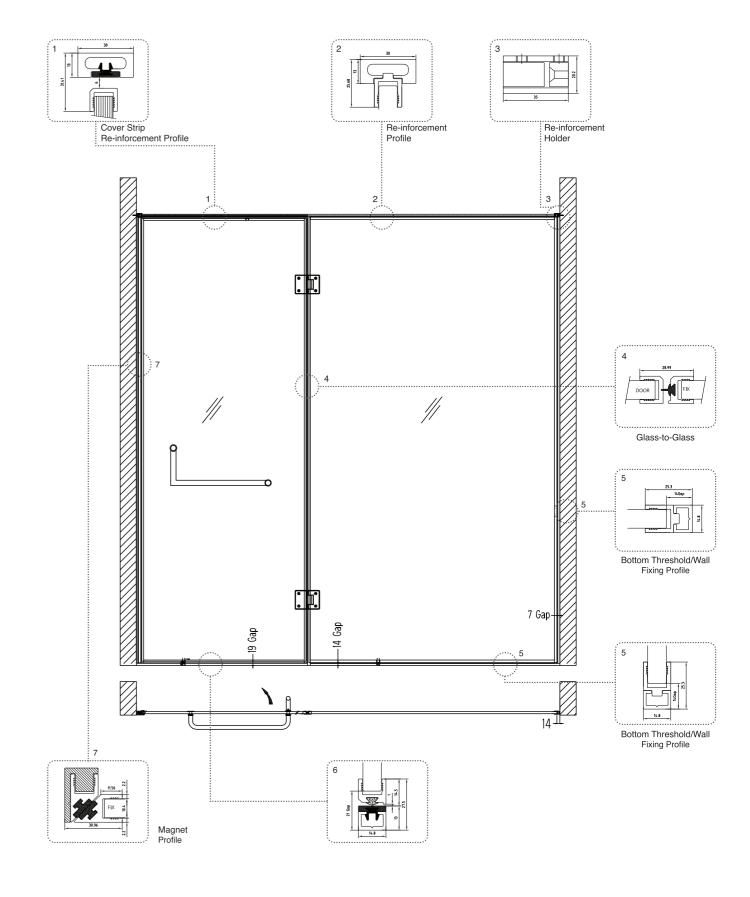




WALL-TO-GLASS° 180 SHOWER ENCLOSURE






	For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.	
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	1 Nos.	
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	2 Nos.	
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	1 Nos.	
04	OZSW-F22-TB1 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
05	OZSW-F22-TB2 3mtr	Bottom Profile A Threshold/Wall	3Mtr	2 Nos.	
06	OZSW-F22-MP 3mtr	Magnetic Profile with Strip	3Mtr	1 Nos.	
07	OZSW-F22-25T-ED 2/3mtr	Reinforcement track	2/3Mtr	1 Nos.	
08	OZSW-F22-CST 2/3mtr	Cover Strip Almunium with Plastic Strip	2/3Mtr	1 Nos.	
09		Reinforcement Holder	N/A	1 Nos.	

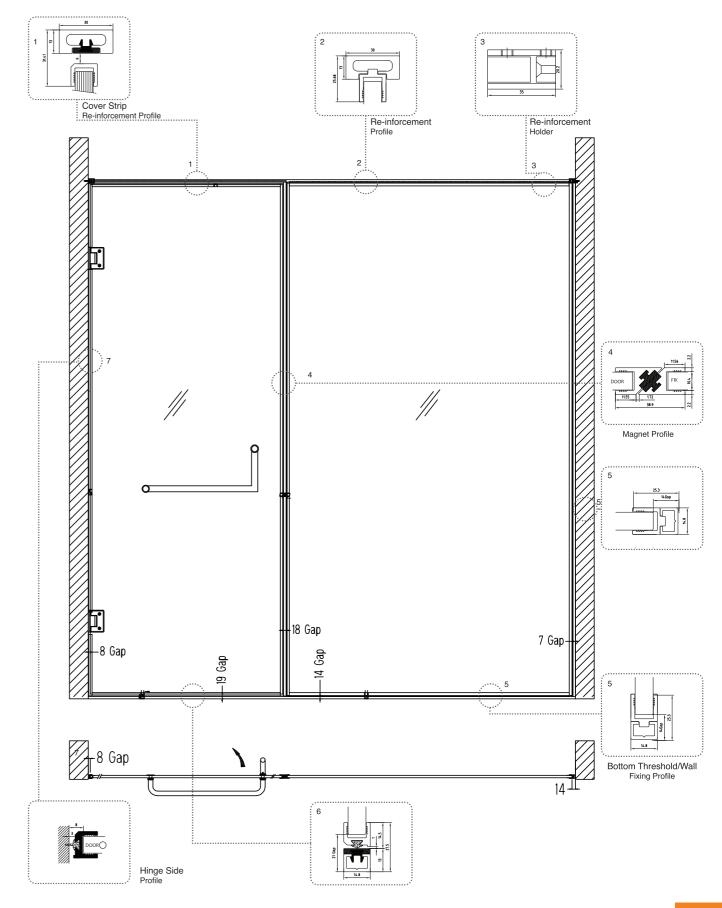


OUTLINER








OSH-1S STD BM Wall-To-Glass Hinge Seamless Design Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm




OSH-1S STD CP Wall-To-Glass Hinge Seamless Design Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm






OGH-TB-ED STD BM **Towel Bar With Handle** Water Tight Fitting Ensures No Water Leakage Minimum Gap

Suitable for glass thickness: 8-10mm



OGH-TB-ED STD CP **Towel Bar With Handle** Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap

Suitable for glass thickness: 8-10mm





OSSH-44-ED STD BM Glass-to-Glass Hinge 90°

Snapfit Cover Cap



OSSH-44-ED STD CP Glass-to-Glass Hinge 90°





OGH-TB-1 STD BM **Towel Bar with Handle** Seamless Design

Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm



OGH-TB-1 STD CP **Towel Bar with Handle**


Seamless Design Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm






OSH-2S STD BM Glass-to-Glass 180° Hinge

Seamless Design Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm




OSH-2S STD CP

Glass-to-Glass 180° Hinge Seamless Design Water Tight Fitting Ensures No Water Leakage Minimum Gap Snapfit Cover Cap Suitable for glass thickness: 8-10mm








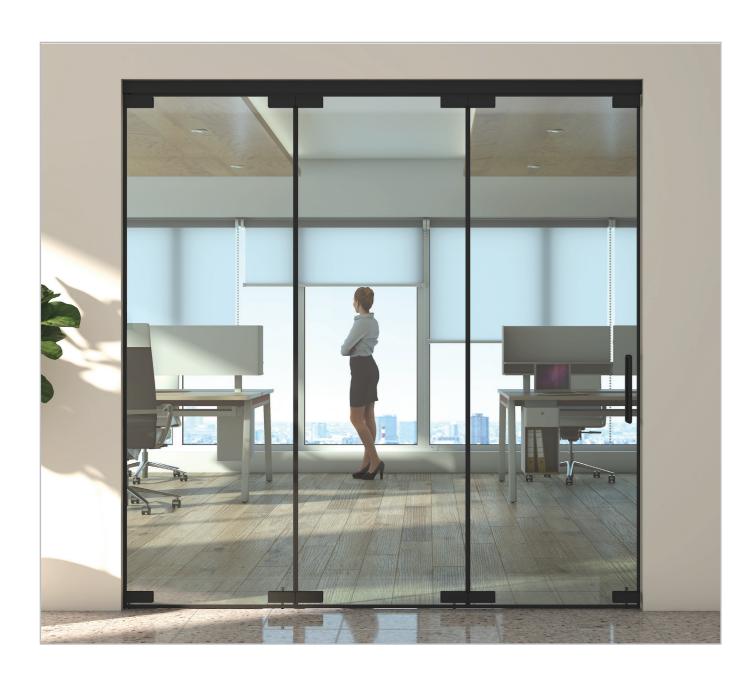

For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	4 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	4 Nos.
For 12 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	4 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	4 Nos.

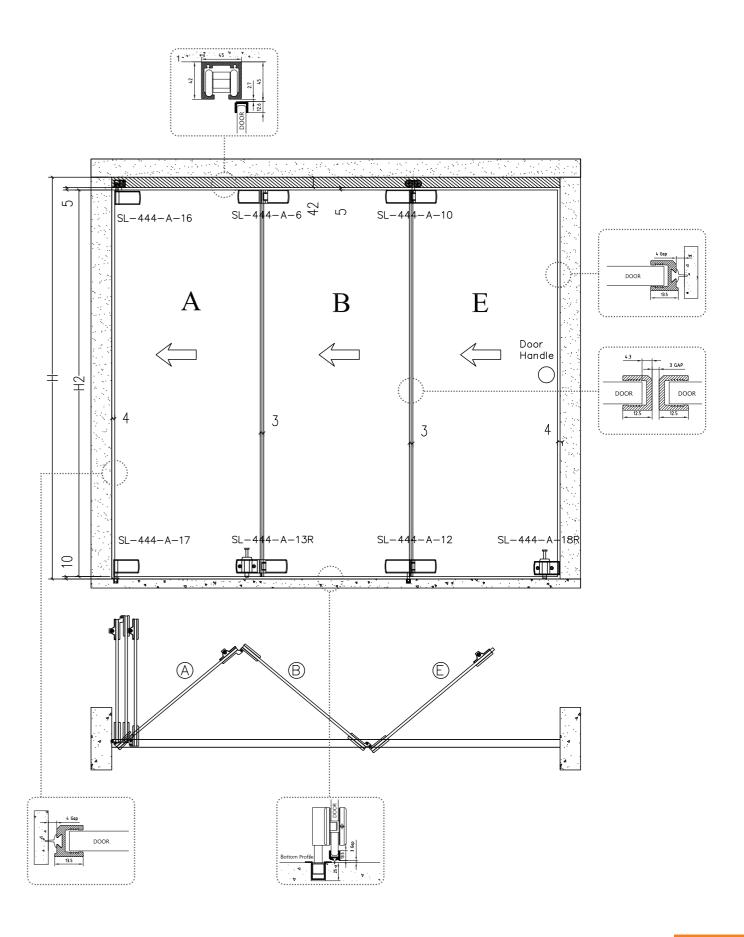

OUTLINER FOLD CS-444


CENTER SLIDING FOLDING SYSTEM







For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	4 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	4 Nos.
For 12 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	4 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	4 Nos.

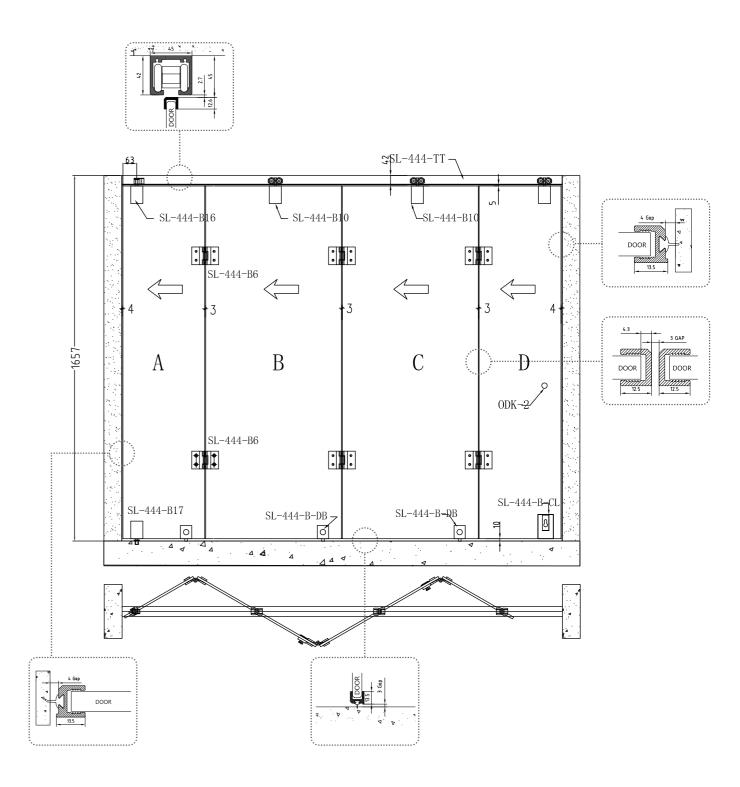



OUTLINER FOLD CS-444







SL-444-B10 BM Folding Door Roller



SL-444-B6 BM Glass-to-Glass Hinges



SL-444-B16 BM Upper Fixing Clip



SL-444-B17 BM Lower Fixing Clip



SL-444-TT 3mtr BM SL-444-TT 4mtr BM Top Track



SL-444-B-CL BM Corner Patch Lock



SL-444-B-DB BM Glass Door Bolt



SL-444-B-SLV BM Bolt Sleeve



SL-444-B-SP BM Strike Plate









SL-444-TT 3mtr BM SL-444-TT 4mtr BM Top Track



SL-444-BT 3mtr BM SL-444-BT 4mtr BM Bottom Track



SL-444-TT-C 3mtr BM SS Cover for track SL-444-TT



SL-444-A6 STD BM Glass-to-Glass Interconnecting Hinge



SL-444-A10 STD BM Glass-to-Glass Connector with Roller



SL-444-A11 STD BM End Sliding Folding Panel Fitting with Roller



SL-444-A12 STD BM Glass-to-Glass Connecting Hinge with Guide Locator



SL-444-A13-L/R STD BM Glass-to-Glass Connecting Hinge with Floor Lock









SL-444-A9 STD BM Glass-to-Walll Hinge for Single Action Doors



SL-444-A14 STD BM End Sliding Folding Panel Fitting with Guide Locator



SL-444-A16 STD BM End Panel Fitting with Top Pivot



SL-444-A17 STD BM End Panel Fitting with Bottom Pivot



SL-444-A18-L STD BM End Panel Fitting with Bottom Pivot (for odd Panels)



SL-444-A18-R STD BM End Panel Fitting with Bottom Pivot (for odd panels)



SDL-14A STD BM Sliding Door Lock with Knob



SDL-14B STD BM Sliding Door Strike Box with Knob


TYPICAL LAYOUT


AUTOMATIC





For 10 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-10-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-10-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.
For 12 MM Glass Thickness				
S. No.	Code	Descriptions	Length	QTY.
01	OZSW-F22-ED-P-12-3mtr	Hinge Side Profile with Gasket	3Mtr	2 Nos.
02	OZSW-F22-HP-12-3mtr	Perimeter/Side Profile	3Mtr	4 Nos.
03	OZSW-F22-HP-GKT-3mtr	Gasket	3Mtr	2 Nos.

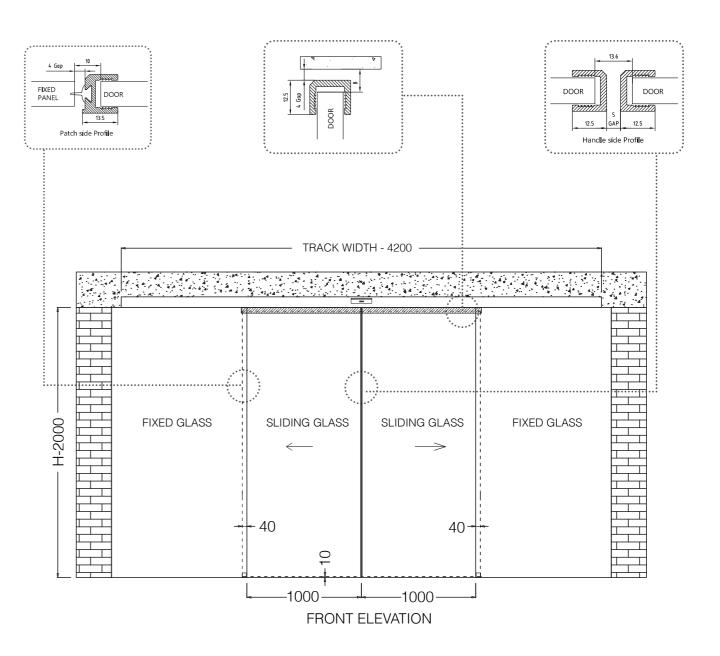



OUTLINER AUTO PRO



OZOM-111E-PLUS-N 4.2mtr OZOM-111E-PLUS-N Single 2.4 mtr STD(For Compact & Slim body | Intelligent Controller | Modular Design | Noiseless Functionality

Features:

- Engine case, height: 128mm
- Engine case cover height: 150mm
- Self learning micro computer processing controller
- · Adjustable tensioner wheel
- 24V DC 65W brushless motor
- Digital adjustable parameters
- Controller with built-in remote control receiver
- In-built electromagnetic locking

Specifications:

- · Single / Bi-parting sliding door system
- Suitable door weight : 100 Kg x 2
- · Maximum door opening : 2mtr
- · Adjustable parameters for opening speed, closing speed, opening buffer speed, closing buffer speed, opening buffer distance, closing buffer distance, opening time & opening force
- · Integration possible with Microwave Sensor, Handwave Sensor, PIR Sensor, Digital Door Key, Finger Print Controller Wireless Push Button, Safety Beam, Remote Control, Push Buttons etc
- · Warranty will be lapsed in absence of CVT.



OZOM-111P-PLUS 4.2mtr OZOM-111P-PLUS 5.2mtr OZOM-111P-PLUS 6.0mtr Compact & Slim body | Noiseless Functionality | Intelligent Controller | Modular Design

Features:

- Engine case, height: 90mm
- · Self-learning micro-computer processing controller
- Slim type track
- · 24V DC 65W brushless motor with built-in rectifier
- · Adjustable parameters
- Engine case cover height: 155mm
- · Controller with built-in remote control receiver
- · Adjustable tensioner wheel
- Operating standard cycle for 5,00,000 cycles in-house tested

Specifications:

- · Single/Bi-parting sliding door system
- Suitable door weight : 120Kg x 2
- · Maximum door width: 2/2.5/3mtr
- · Adjustable parameters for opening speed, door buffer distance, door buffer intensity, closing speed, closed buffer distance, closed buffer force, opening hours, & starting force
- · Integration possible with Microwave Sensor, Handwave Sensor, PIR Sensor, Digital Door Key, Wireless Push Button, Safety Beam, Remote Control, Push Buttons, etc.
- · Warranty will be lapsed in absence of CVT.

OUTLINER

MOTION SENSORS




OZOM-AC-99

Microwave Sensor

High sensitivity, wide range eagle type sensors with least interface with industrial noise.



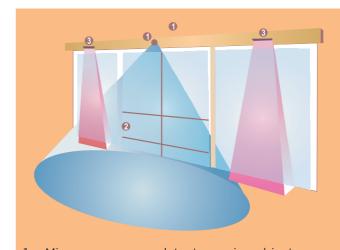

- Microwave sensor, detects moving objects
- Infrared safety beam, opens the door if someone comes in between door while closing
- 3. Infrared presence detector

Also Available



Technical Specification

reeminear opeemean	
Technology	Microwave and Microprocessor
Transmitter frequency	24.125 Ghz
Transmitter radiated power	<20dBm EIRP
Transmitter power density	<5mW/cm²
Detection mode	Motion
Minimum detection speed	5 cm/s (measure in the sensor axis)
Supply voltage	12V-24V AC+/-10%, 12V-30V DC
Mains frequency	50 to 60 Hz
Max. power consumption	<2W (VA)
Output	relay (free of potential change-over contact)
Max. contact voltage	42V AC-60V DC
Max. contact current	1A (resistive)
Max. switching power	30W (DC)/60VA (AC)
Max. mounting height	3m
Protection degree	IP54
Temprature range	from- 20°C to +55°C
6:	are subject to obange without prior notice

Specification are subject to change without prior notice





sources in the detection field



Avoid highly reflective objects in the infrared field

209 www.ozone-india.com customercare@ozone-india.com 210

OUTLINER


OUTLINER AUTO PRO

Microwave Sensor: High sensitivity, wide range eagle type sensors with least interface with industrial noise. Infrared Sensor for Active and presence detector.

Opening & safety sensor for automatic sliding doors

Other use of the device is outside the permitted purpose and can not be guaranteed by the manufacturer. The manufacturer cannot be held responsible for incorrect installations or inappropriate adjustments of the sensor.

OZOM-AC-11-ZS

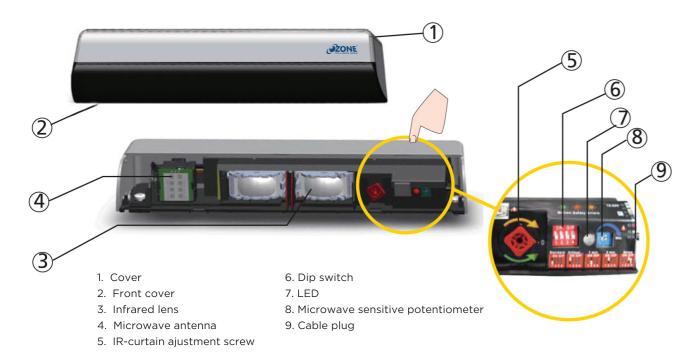

Technical Specification

Supply voltage:	12 V-24 V AC +/-10% ; 12 V-30 V DC 0%/+10%		
Power consumption:	< 3W		
Mounting height:	1.8m to 3m		
Temperature range:	-25°C to +55°C		
Degree of protection:	IP54		
Detection mode:	Motion Min. detection speed: 5cm/s	Presence Typical response time: <128ms (max. 500ms)	
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: <20 dBm EIRP Transmitter power density: <5 mW/cm2	Active infrared with background analysis Spot diameter: 6cm (typ) Number of spots: 24 by curtain Number of curtains: 1	
Angle:	From 15° to 45° vertical (adjustable)	From -5° to +8° (adjustable)	
Output:	Relay (free of potential) Max. contact voltage: 42 V AC/DC Max. contact current: 1A (resistive) Max. switching power: 30W (DC)/60 VA (AC)	Relay (free of potential) Max. contact voltage: 42V AC/DC Max. contact current: 1A (resistive) Max. switching power: 30W (DC)/60 VA (AC)	
Hold time output signal:	0.5s	0.5s	

OUTLINER ACCESSORIES





OZOM-PR-11Aluminium clamp
Available in 1mtr. & 1.5mtr (pair)



OZOM-FG-22 Floor guides for framed doors with adjustable width (pair)



OZOM-WPB-11 Wireless Push Button (Waterproof)



OZOM-DDK-11Digital Door Key
(RFID & Numeric ID)



OZOM-FPC-11 Controller Fingerprint



OZOM-11P-AC-11 Remote Control for Automatic Sliding Door



OZ-SW-11Large area push button for automatic doors



OZ-SW-11MMetallic wall mounting push button switch



OZOM-HWS-11 Hand Wave Sensor



OZOM-SB-11 (Single Barrier) OZOM-SB-12 (Double Barrier)



OZOM-SB-111N (Single Barrier) Use with OZOM-111E



OZOM AC-66 PIRCeiling mounting PIR sensor



OZOM-111P-PLUS Remote Control



OZOM-111E-PLUS Remote Control

Specification are subject to change without prior notice

211 www.ozone-india.com customercare@ozone-india.com 212